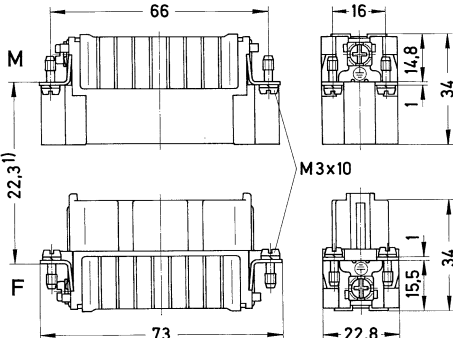

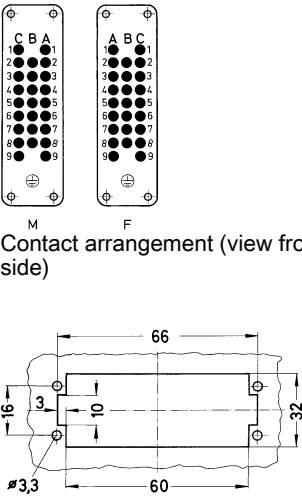


Number of contacts

25+

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 21 025 3001	09 21 025 3101	 1) distance for contact max. 24 mm
Han D®, Wrap termination 		09 21 025 2601	09 21 025 2701	 Contact arrangement (view from termination side) Panel cut out for use without hood