

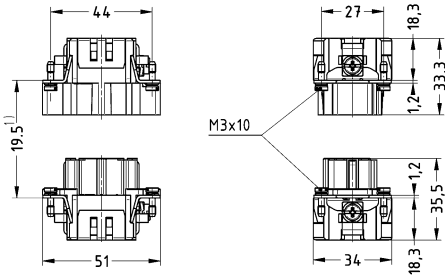

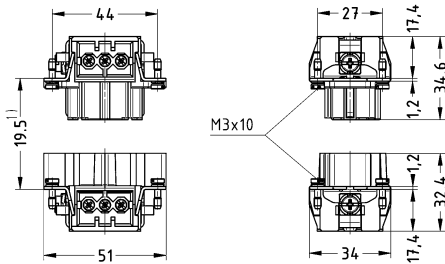





Number of contacts

6+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 006 2602	09 33 006 2702	 1) distance for contact max. 21 mm
Han E®, Screw termination, With wire protection 	0,75 ... 2,5	09 33 006 2601	09 33 006 2701	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out