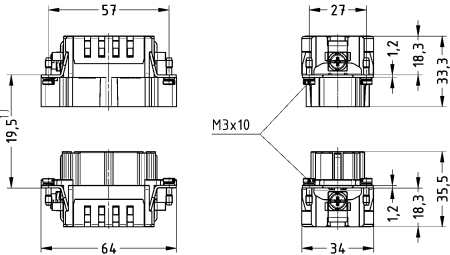

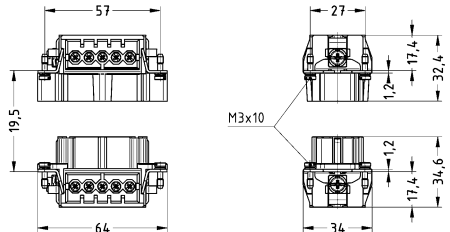





Number of contacts

10+ 

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 010 2602	09 33 010 2702	 1) distance for contact max. 21 mm
Han E®, Screw termination, With wire protection 	0,75 ... 2,5	09 33 010 2601	09 33 010 2701	 1) distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out