

COMPACT, TYPE 4X



INDUSTRY STANDARDS

UL 508A Listed; Type 4, 4X, 12, 13; File No. E61997

NEMA/EEMAC Type 4, 4X, 12, 13
CSA File No. 42186: Type 4, 4X, 12, 13
IEC 60529, IP66

APPLICATION

For use in indoor or outdoor applications, these stylized enclosures protect components and controls in corrosive environments.

SPECIFICATIONS

- Cast aluminum; no welded seams or sharp corners
- Stainless steel captivated cover screws placed outside sealed area
- Two to four grounding screws located on enclosure back wall
- Oil-resistant O-ring gasket
- Tongue-and-groove sealing construction
- Threaded internal bosses provided for mounting optional panels, rails and other components
- Mounting holes provided in corners outside of gasketed area

FINISH

RAL 7042 textured gray finish, inside and out.
Custom colors available; contact customer service for additional options.

ACCESSORIES

DIN Type Rails
Hinge Kit
Mounting Bracket Kits
DIN Type Rails

BULLETIN: CA1


Standard Product

Catalog Number	AxBxC mm/in.	External Dimensions L x W mm/in.	Conductive Panel	Panel Size D x E mm/in.	Mounting G x H mm/in.	F mm/in.	J mm/in.	K mm/in.	M mm/in.	N mm/in.	T mm/in.
CCA886	75 x 80 x 57 2.95 x 3.15 x 2.24	75 x 80 2.95 x 3.15	CCAP88	64 x 69 2.52 x 2.72	52 x 63 2.05 x 2.48	41 1.61	41 1.61	13 0.51	30 1.18	48 1.89	4 0.16
CCA1286	125 x 80 x 57 4.92 x 3.15 x 2.24	125 x 80 4.92 x 3.15	CCAP128	114 x 69 4.49 x 2.72	52 x 113 2.05 x 4.45	45 1.77	42 1.65	15 0.59	30 1.18	48 1.89	4 0.16
CCA1886	175 x 80 x 57 6.89 x 3.15 x 2.24	175 x 80 6.89 x 3.15	CCAP188	164 x 69 6.46 x 2.72	52 x 163 2.05 x 6.42	41 1.61	41 1.61	13 0.51	30 1.18	48 1.89	4 0.16
CCA12128	122 x 122 x 80 4.80 x 4.80 x 3.15	122 x 122 4.80 x 4.80	CCAP1212	109 x 108 4.29 x 4.26	82 x 106 3.23 x 4.17	63 2.48	60 2.36	20 0.79	52 2.05	—	4 0.16
CCA22128	220 x 120 x 80 8.66 x 4.72 x 3.15	220 x 122 8.66 x 4.80	CCAP2212	204 x 108 8.04 x 4.26	82 x 204 3.23 x 8.03	63 2.48	60 2.36	20 0.79	52 2.05	—	4 0.16
CCA16169	160 x 160 x 90 6.30 x 6.30 x 3.54	160 x 160 6.30 x 6.30	CCAP1616	146 x 146 5.75 x 5.75	110 x 140 4.33 x 5.51	73 2.87	70 2.76	20 0.79	76 2.99	—	4 0.16
CCA26169	260 x 160 x 90 10.24 x 6.30 x 3.54	260 x 160 10.23 x 6.30	CCAP2616	246 x 146 9.69 x 5.75	110 x 240 4.33 x 9.45	73 2.87	70 2.76	20 0.79	76 2.99	—	4 0.16
CCA36169	360 x 160 x 90 14.17 x 6.30 x 3.54	360 x 160 14.17 x 6.30	CCAP3616	346 x 146 13.63 x 5.75	110 x 340 4.33 x 13.39	73 2.87	70 2.76	20 0.79	76 2.99	—	4 0.16
CCA202311	200 x 230 x 110 7.87 x 9.06 x 4.33	200 x 230 7.87 x 9.06	CCAP2023	185 x 215 7.29 x 8.47	180 x 180 7.09 x 7.09	93 3.66	90 3.54	20 0.79	80 3.15	144 5.67	4 0.16
CCA332311	330 x 230 x 110 12.99 x 9.06 x 4.33	330 x 230 12.99 x 9.06	CCAP3323	315 x 215 12.41 x 8.47	180 x 310 7.09 x 12.21	93 3.66	90 3.54	20 0.79	80 3.15	144 5.67	4 0.16
CCA332318	330 x 230 x 180 12.99 x 9.06 x 7.09	330 x 230 12.99 x 9.06	CCAP3323	315 x 215 12.41 x 8.47	180 x 310 7.09 x 12.21	162 6.38	160 6.30	20 0.79	100 3.94	144 5.67	4 0.16


A x B x C are internal dimensions.

Purchase panels separately.


CCA886, CCA1286 and CCA1886 enclosures have only two mounting holes.

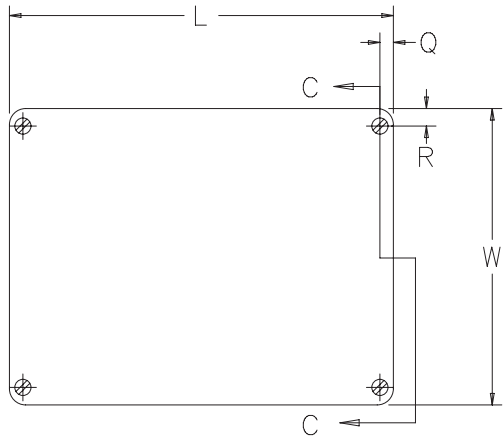


TOP VIEW

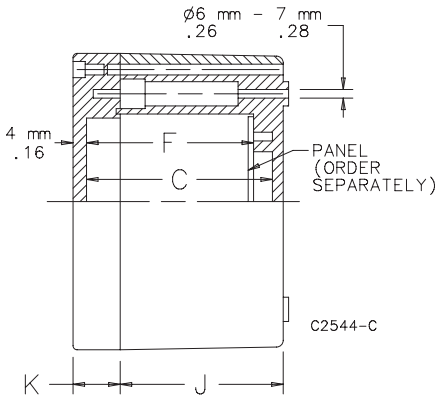

SECTION C-C

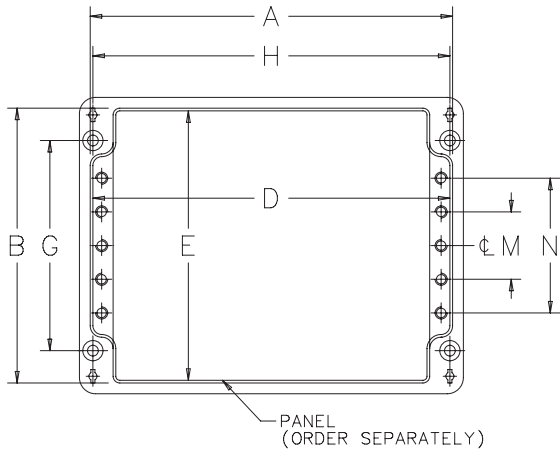

TOP VIEW WITH COVER REMOVED

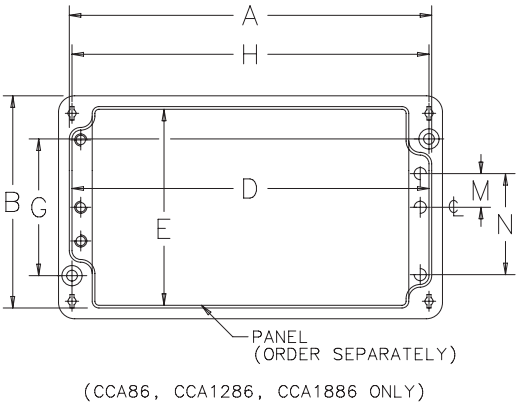

(CCA86, CCA1286, CCA1886 ONLY)