

Twist-Lock® Devices  
30A, 125V AC, 2 Pole, 3 Wire Grounding  
Insulgrip® Connector

HUBBELL



Features

- UL Type 4X Environmental seal protects connection while in use.
- One-piece, engineered thermoplastic housing is impact-resistant for heavy-duty industrial environments
- Closure cap is included for environmental seal when device is not in use
- Superior cord grip design protects terminations from excess strain.

Ordering Information

| Description                             | Cord Diameter      | UPC          | Catalog Number |
|-----------------------------------------|--------------------|--------------|----------------|
| Black PBT housing,<br>white PBT clamps. | .360"-.930" (9-24) | 783585231624 | HBL2613SW      |

Listings


Listed to UL 498  
Fed.Spec. W-C-596  
Certified to CSA C22.2 No.42  
UL Listed, CSA Certified to Type 4, 4X and Type 12

Specifications

|                      |                                               |
|----------------------|-----------------------------------------------|
| Housing / Cord Clamp | PBT                                           |
| Terminal Retainer    | Clear polycarbonate                           |
| Contacts             | Brass                                         |
| Terminal Screws      | #10-32 Brass (Phillips / Slotted / Robertson) |
| Terminal Clamp       | Cold rolled steel – nickel plated             |
| Assembly Screws      | Stainless Steel                               |
| Watertight Gland     | Neoprene                                      |
| Closure Plug         | Santoprene                                    |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Terminal Accommodation  | #16 AWG - #8 AWG stranded copper wire only.              |
| Terminal Identification | Terminals identified in accordance with UL 498           |
| <b>Environmental</b>    |                                                          |
| Flammability            | V0 per UL94 or CSA 22.2 No.0.17                          |
| Moisture Resistance     | Type 4, 4X, 12, IP66 suitability                         |
| Operating Temperatures  | Maximum Continuous 75°C Minimum -40°C (w/o impact)       |

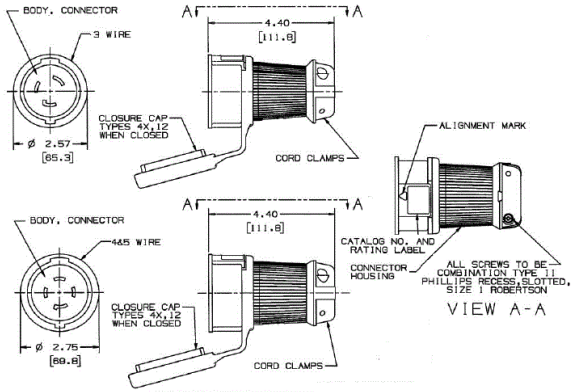

Accessories

|                                           |           |
|-------------------------------------------|-----------|
| Watertight Safety Shroud Plug             | HBL2611SW |
| Watertight Safety Shroud<br>Flanged Inlet | HBL2615SW |

Resources

|                      |
|----------------------|
| Customer Use Drawing |
| eCatalog             |

