

Twist-Lock® Devices
15A, 277V AC, 2 Pole, 3 Wire Grounding
Valise® Plug

HUBBELL



Features

- Two captive multiple drive assembly screws
- Totally insulated impact and crush resistant nylon body
- Powerful cord grips prevent conductor slippage and strain on wiring terminals

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black nylon.	.220"-.660" (5.6-16.8)	783585043302	HBL4773VBK

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications


Housing	Nylon
Cable Inserts	Polyphenylene Oxide
Blades	Brass
Terminal Screws	#6-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - Zinc plated

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#18 AWG - #12 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)



15A 277V AC
NEMA L7-15P
UL/CSA
2 HP

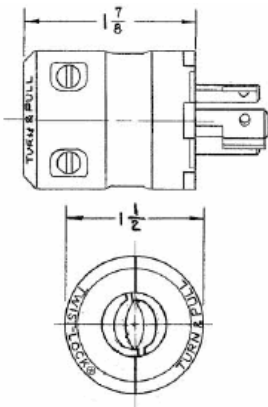

Accessories

Connector	HBL4779VY
Duplex Receptacle	HBL4750
Single Receptacle	HBL4760
Flanged Receptacle	HBL4785C

Resources

Customer Use Drawing
eCatalog

