

Twist-Lock® Devices  
20A, 250V AC, 2 Pole, 2 Wire Non-Grounding  
Insulgrip® Connector

HUBBELL



Features

- Insulated nylon construction to keep non-current carrying parts from becoming energized
- Tough ribbed nylon housing for secure gripping
- Two-part cord grip tightens with two screws for maximum retention force.

Ordering Information

| Description           | Cord Diameter             | UPC          | Catalog Number |
|-----------------------|---------------------------|--------------|----------------|
| Black and white nylon | .230"-.720"<br>(5.6-18.3) | 783585177007 | HBL7101C       |

Listings


Listed to UL Standard 498  
Fed Spec W-C-596

Specifications

|                   |                                   |
|-------------------|-----------------------------------|
| Body              | Nylon                             |
| Terminal Retainer | Clear polycarbonate               |
| Contacts          | Bronze                            |
| Terminal Screw    | Brass                             |
| Terminal Clamp    | Cold rolled steel – nickel plated |
| Assembly Screws   | Steel - zinc plated               |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Terminal Accommodation  | #18 AWG - #10 AWG stranded copper wire only.             |
| Terminal Identification | Terminals identified in accordance with UL 498           |
| <b>Environmental</b>    |                                                          |
| Flammability            | HB or better per UL94/CSA 22.2 No.0.17                   |
| Moisture Resistance     | IP20 Suitability                                         |
| Operating Temperatures  | Maximum Continuous 75°C; Minimum -40°C (w/o impact)      |

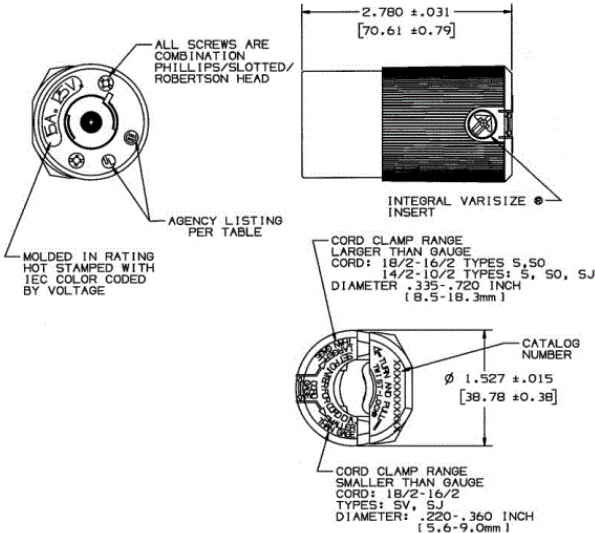

Accessories

|                   |          |
|-------------------|----------|
| Plug              | HBL7102C |
| Weatherproof Boot | HBL6024  |

Resources

Customer Use Drawing  
eCatalog

