

Twist-Lock® Devices
20A, 250V AC, 2 Pole, 2 Wire Non-Grounding
Insulgrip® Plug

HUBBELL



Features

- Integral dust shield protects wiring chamber from dust or contaminants.
- Self-threading screws specially designed for secure assembly
- Wiring chambers separate and positively insulate conductors and promote easy inspection

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon, polarized	.230"-.720" (5.6-18.3)	783585177052	HBL7102C

Listings

Listed to UL 499
Fed.Spec. W-C-597
Certified to CSA C22.2 No.43

Specifications


Body	Nylon
Terminal Retainer	Clear polycarbonate
Contacts	Bronze
Terminal Screw	Brass
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - zinc plated

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)



20A 250V
NEMA L2-20P
UL Listed
2 HP

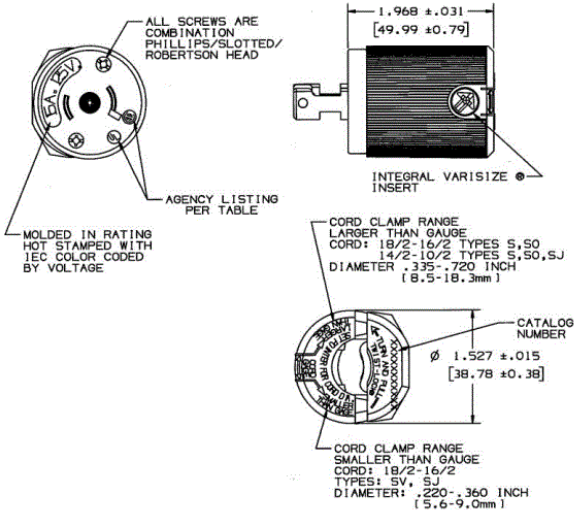

Accessories

Connector	HBL7101C
Weatherproof Boot	HBL6023

Resources

Customer Use Drawing
eCatalog

