

Midget Twist-Lock® Devices
15A, 125V AC, 2 Pole, 2 Wire Non-Grounding
Valise® Connector

HUBBELL



Features

- Fully insulated, abuse resistant nylon housing
- Insulation displacement terminals reduce wiring time
- Insulation displacement terminal

Ordering Information

Description	Cord Diameter	UPC Number	Catalog Number
Black Valise® connector, polarized.	.220"- .385"(5.6-9.8)	783585237251	HBL7464V

Listings


Listed to UL 498
Certified to CSA C22.2 No.42

Specifications

Housing	Nylon
Contacts	Brass
Terminal Screws	#6 - 32 Steel (Philips / Slotted / Robertson)
Terminal Clamps	Steel - Nickel plated
Body Holding Screws	Steel - Zinc plated

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accomodation	#18 AWG - #14 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

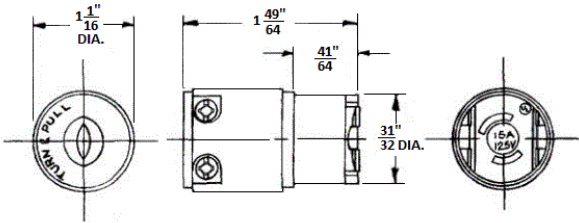

Accessories

Valise® Plug	HBL7465V
Stainless Steel Flanged Inlet, Polarized Terminals	HBL7467
Stainless Steel Flanged Inlet, Not Polarized Terminals	HBL7466

Resources

Customer Use Drawing
eCatalog

