

Midget Twist-Lock® Devices  
15A, 125/250V AC, 3 Pole, 3 Wire  
Non-Grounding  
Connector

HUBBELL



Features

- Abuse resistant nylon housing
- Phenolic body for high heat resistance
- Angled body design for low profile in tight spaces

Ordering Information

| Description               | Cord Diameter         | UPC          | Catalog Number |
|---------------------------|-----------------------|--------------|----------------|
| Black straight connector. | .281-.421" (7.1-10.7) | 783585237381 | HBL7484        |

Listings


Listed to UL 498  
Certified to CSA C22.2 No.42

Specifications

|                 |                                             |
|-----------------|---------------------------------------------|
| Housing         | Nylon                                       |
| Contacts        | Brass                                       |
| Contact Holder  | Phenolic                                    |
| Terminal Screws | #5-40 Brass                                 |
| Terminal Clamp  | Zinc plated steel with black lacquer finish |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Terminal Accomodation   | #18 AWG - #14 AWG stranded copper wire only.             |
| Terminal Identification | Terminals identified in accordance with UL 498           |
| <b>Environmental</b>    |                                                          |
| Flammability            | HB or better per UL94/CSA 22.2 No.0.17                   |
| Moisture Resistance     | IP20 Suitability                                         |
| Operating Temperatures  | Maximum Continuous 75°C Minimum -40°C (w/o impact)       |

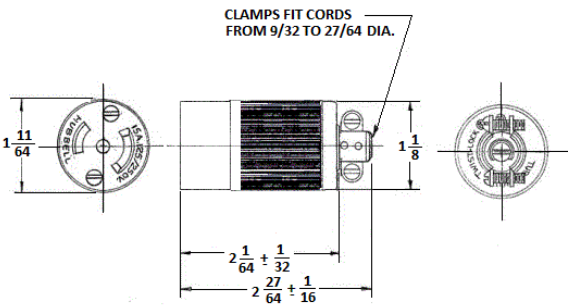

Accessories

|                               |          |
|-------------------------------|----------|
| Plug                          | HBL7485  |
| Nylon Flanged Inlet           | HBL7486N |
| Stainless Steel Flanged Inlet | HBL7486  |

Resources

Customer Use Drawing  
eCatalog

