

Midget Twist-Lock® Devices
15A, 125/250V AC, 3 Pole, 3 Wire
Non-Grounding
Plug

HUBBELL



Features

- Abuse resistant nylon housing
- Phenolic body for high heat resistance
- Angled body design for low profile in tight spaces
- Totally insulated body adds extra measure of safety

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black straight plug.	.281"-.421" (7.1-10.7)	783585237411	HBL7485

Listings


Listed to UL 498
Certified to CSA C22.2 No.42

Specifications

Housing	Nylon
Blades	Brass
Blade Holder	Phenolic
Terminal Screws	#5-40 Brass
Terminal Clamp	Zinc plated steel with black lacquer finish

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accomodation	#18 AWG - #14 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

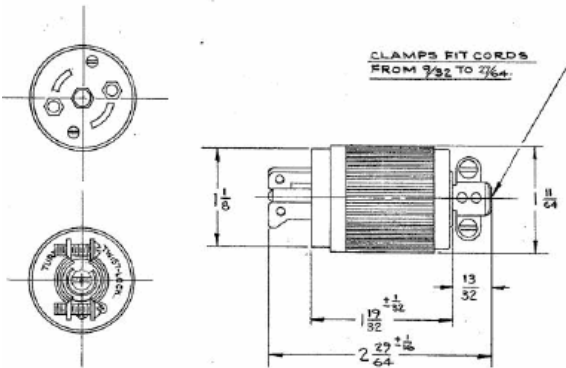

Accessories

Connector	HBL7484
Nylon Flanged Receptacle	HBL7478N
Stainless Steel Flanged Receptacle	HBL7487
StainlessSteel Flanged Receptacle with Covered Terminals	HBL7489

Resources

Customer Use Drawing
eCatalog

