

Non-NEMA Twist-Lock® Devices
10A, 250V/15A, 125V, 3 Pole, 3 Wire
Non-Grounding
Insulgrip® Plug



Features

- Individually molded face for each blade configuration keeps debris out of plug interior
- Ribbed nylon housing is impact and chemical resistant
- Roomy wiring chamber provides ample space for wiring

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon	.230"-.720"	783585178752	HBL7567C
Multiple drive screws	(5.8-18.3)		

Listings

Fed.Spec.W-C-596
Certified to CSA C22.2 No.42

Specifications

Blade/Contact Carrier	Natural (white) nylon
Terminal Retainer	Clear polycarbonate
Housing	Black nylon
Cord Clamp	Natural (white) nylon
Blades/Contacts	Brass
Grounding Screw	Brass (green finish)

Performance

Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#18 AWG - #10 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

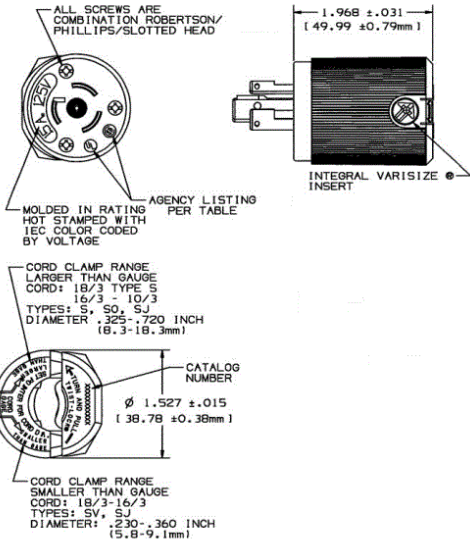

Accessories

Connector	HBL7565C
Duplex Receptacle	HBL7580
Single Receptacle	HBL7582
Stainless Steel Flanged Receptacle	HBL7557

Resources

Customer Use Drawing
eCatalog

