

Midget Twist-Lock® Devices
15A, 125V AC, 2 Pole, 3 Wire Grounding
Valise® Plug

HUBBELL



Features

- Fully insulated, abuse resistant nylon housing
- Insulation displacement terminals reduce wiring time
- Insulation displacement terminal
- Totally insulated body adds extra measure of safety

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black Valise® plug.	.300"-.430" (7.6-10.9)	783585237787	HBL7594V

Listings


Listed to UL 498
Certified to CSA C22.2 No.42
Fed Spec W-C-596

Specifications

Housing	Nylon
Blades	Brass
Insulation Displacement Terminals	Brass
Body Holding Screws	Steel - Zinc plated

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accomodation	#18 AWG - #14 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

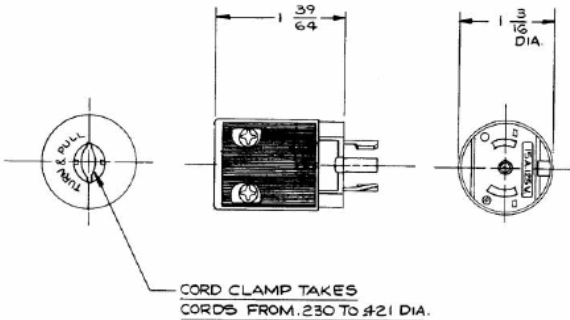

Accessories

Valise® Connector	HBL7593V
Nylon Flanged Receptacle	HBL7596N
Stainless Steel Flanged Receptacle	HBL7596
StainlessSteel Flanged Receptacle with Covered Terminals	HBL7598

Resources

Customer Use Drawing
eCatalog

