

Kellems® Wire Management Products  
Metallic Liquidtight Conduit Fittings  
Conduit Fitting



Features

- Hexagonal nut compresses gland-ring onto conduit
- Nylon gasket provides liquidtight seal at hub
- Non-integral steel ferrule seals conduit

Ordering Information

| Description                       | Trade Size  | UPC          | Catalog Number |
|-----------------------------------|-------------|--------------|----------------|
| 45° Conduit Fitting,<br>Insulated | 1 1/2" (41) | 783585035666 | H15041         |




Listings

UL Listed  
CSA Certified

Specifications

|                 |                   |
|-----------------|-------------------|
| Fitting         | Zinc plated iron  |
| Compression Nut | Zinc plated iron  |
| Ferrule         | Zinc plated steel |
| Split Seal Ring | Nylon             |
| Washer          | Nylon             |
| Locknut         | Zinc plated steel |
| Insulator       | Nylon             |

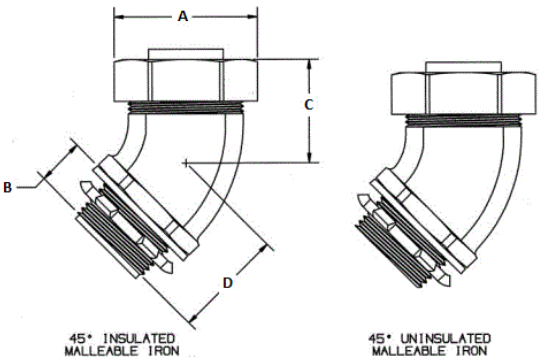

Performance

Environmental

Operating Temperature -60°F to +1000°F (-51°C to +538°C)

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

