

Straight Blade Devices  
20A, 125V, 2 Pole, 3 Wire Grounding  
HBL® Extra Heavy Duty Specification  
Grade Duplex Receptacle



Features

- Triangle marking on face indicates isolated ground
- Slender compact design
- Finder Groove Face

Ordering Information

| Description                           | Device Color | UPC          | Catalog Number |
|---------------------------------------|--------------|--------------|----------------|
| Isolated ground, back and side wired. | Gray         | 783585876870 | IG5362GY       |

Listings


UL Listed to UL498 File No. E2186  
Certified to CSA, C22.2, No. 42 File 285  
Fed. Spec. WC596  
NEMA® WD-6 Compliant

Specifications

|                               |                      |
|-------------------------------|----------------------|
| Face                          | Nylon                |
| Base                          | PBT                  |
| Contacts                      | 0.031" (0.8) Brass   |
| Clamp                         | Nickel plated steel  |
| Terminal Screws               | Brass                |
| Mounting Strap                | .050 in. (1.3) Brass |
| Automatic Self-grounding Clip | Stainless steel      |
| Mounting Screws               | Zinc plated steel    |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #12-#10 AWG stranded or solid copper wire only           |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA   |
| <b>Environmental</b>    |                                                          |
| Flammability            | Top: UL 94V-2, Base: UL 94V-0                            |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

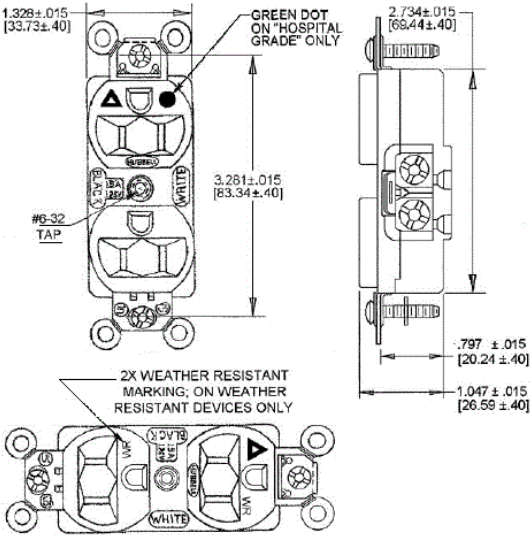

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing  
eCatalog

