

Hubbellock® Devices  
20A, 125V, 2 Pole, 3 Wire Grounding  
Hubbellock® Connector



Features

- Spring loaded safety shutter contains arcing when mating or un-mating devices under load
- Spring loaded safety shutter automatically ejects the plug eliminating contact teasing
- Box terminals in conjunction with screws with pressure pads provide maximum termination strength and dependability
- Three-piece clamp assembly provides maximum strain relief and protects against entry of moisture and dust

Ordering Information

| Description                       | Cord Diameter          | UPC          | Catalog Number |
|-----------------------------------|------------------------|--------------|----------------|
| Nylon housing, thermoset interior | .320"-.660"(8.12-16.5) | 783585017556 | HBL23032B      |

Listings


|                              |
|------------------------------|
| Listed to UL 498             |
| Certified to CSA C22.2 No.42 |

Specifications

|                     |                 |
|---------------------|-----------------|
| Device Color        | Black/White     |
| Housing             | Nylon           |
| Cord Clamp Material | Nylon           |
| Contact Housing     | Thermoset       |
| Contacts            | Bronze          |
| Shutter             | Thermoset       |
| Assembly Screws     | Stainless Steel |

Performance

|                              |                                                          |
|------------------------------|----------------------------------------------------------|
| <b>Electrical</b>            |                                                          |
| Current Interrupting         | Certified for current interrupting at full rated current |
| Dielectric Voltage Withstand | 2,000V minimum                                           |
| <b>Mechanical</b>            |                                                          |
| Terminal Accommodation       | #16 AWG - #12 AWG stranded copper wire only.             |
| Terminal Identification      | Terminals identified in accordance with UL 498           |
| <b>Environmental</b>         |                                                          |
| Flammability                 | HB or better                                             |
| Moisture Resistance          | IP30 Suitability                                         |
| Operating Temperatures       | Maximum Continuous 75°C; Minimum -40°C (w/o impact)      |

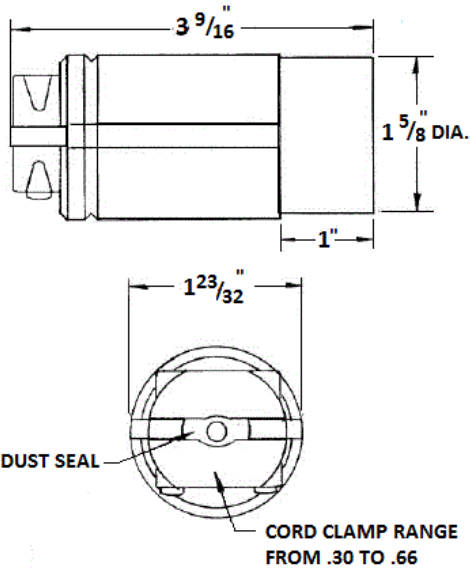

Accessories

|      |           |
|------|-----------|
| Plug | HBL23035B |
|------|-----------|

Resources

|                      |
|----------------------|
| Customer Use Drawing |
| eCatalog             |

