

Straight Blade Devices
20A, 250V, 2 Pole, 3 Wire Grounding
Hospital Grade Valise® Plug



Features

- Hinged one piece body design for easy assembly
- Powerful, offsetting cord grips clamp on individual conductors

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Valise plug, white	.300"-.660" (7.6-16.8)	783585016375	HBL8464V



Listings


UL Listed to UL498 File No. E1706
CSA Certified to C22.2 No 42 File 280C
Fed. Spec. W-C-596
NEMA® WD-6 Compliant

Specifications

Housing	Nylon
Blades	Brass
Assembly Screws	Stainless steel
Cable Inserts	PPO

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2000V AC minimum
Mechanical	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#18-#12 AWG stranded copper wire only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Environmental	
Flammability	UL 94 HB
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

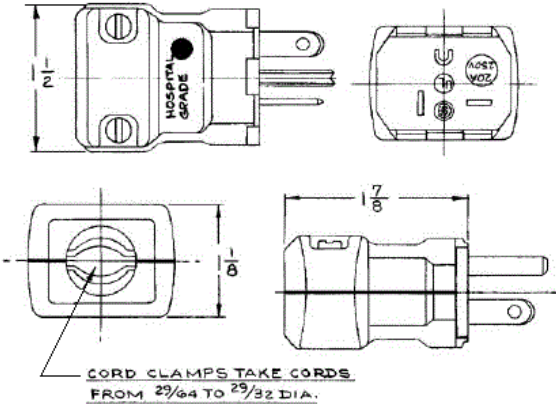

Resources

Customer Use Drawing
eCatalog

