

Straight Blade Devices
15A, 125V, 2 Pole, 3 Wire Grounding
Insulgrip Connector



Features

- Individual wiring terminals completely enclosed
- Powerful, offsetting cord grips clamp on individual conductors
- Roomy wiring chamber provides ample space for wiring
- Corrosion Resistant

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Corrosion resistant yellow nylon	.230"-.720"(5.8-18.3)	783585161600	HBL52CM69C

Listings


UL Listed to UL498 File E1706
CSA Certified to C22.2 No. 42 File 280
NEMA® WD-6 Compliant

Specifications

Housing	Nylon
Contact Holder	Nylon
Terminal Retainer	Clear Polycarbonate
Contacts	.040 in. (1.0) Brass
Terminal Screws	#8-32 Brass , multiple drive
Terminal Clamp	Nickel plated steel
Assembly Screws	Stainless steel

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#18-10 AWG copper conductors only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Environmental	
Flammability	UL 94 HB or better
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

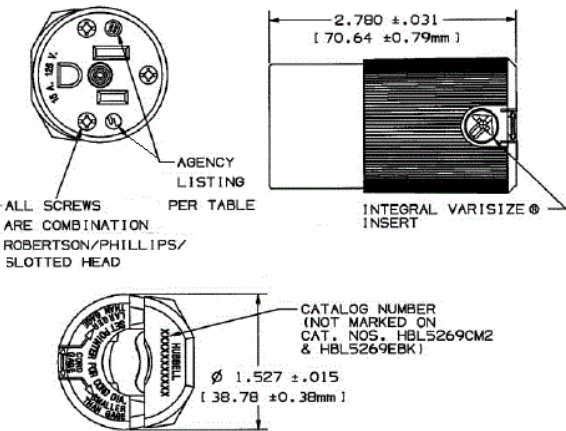

Accessories

Weatherproof Boot	HBL60CM18
-------------------	-----------

Resources

Customer Use Drawing
eCatalog

