


## 50 Amp, 250 Volts DC and 600 Volts AC

### Plugs


| Description                                    | Cord Dia.                     | Catalog Number  |                 |
|------------------------------------------------|-------------------------------|-----------------|-----------------|
| Nylon cover, thermoplastic polyester interior. | .830"-1.250"<br>(21.08-31.75) | <b>HBL3765C</b> | <b>HBL7765C</b> |

Note: See page B-60 for accessories.



### Flanged Inlets

| Description                                                   | Catalog Number                |
|---------------------------------------------------------------|-------------------------------|
| Zinc plated steel casing, thermoset interior.                 | <b>HBL3775</b> <b>HBL7958</b> |
| Zinc plated steel casing, thermoset interior with lift cover. | <b>HBL3768</b> <b>HBL7968</b> |

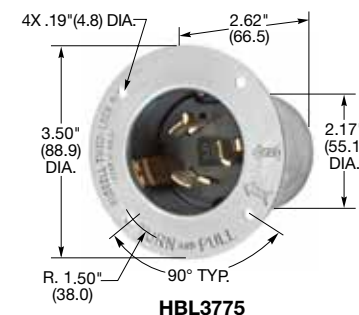

### Connector Bodies

| Description                                    | Cord Dia.                     | Catalog Number  |                 |
|------------------------------------------------|-------------------------------|-----------------|-----------------|
| Nylon cover, thermoplastic polyester interior. | .830"-1.250"<br>(21.08-31.75) | <b>HBL3764C</b> | <b>HBL7764C</b> |


Note: See page B-60 for accessories.



### Receptacles

| Description     | Catalog Number                |
|-----------------|-------------------------------|
| Black phenolic. | <b>HBL3769</b> <b>HBL7379</b> |

Note: See page B-60 for accessories.



**Important Note:** Catalog numbers HBL7765C, HBL7958, HBL7968, HBL7764C, HBL7379 are for replacement use only. See other singly rated 50A Twist-Lock® devices in this section. HBL3700 series Twist-Lock devices do not interchange with any other devices in this section.

Dimensions in Inches (mm)