

Straight Blade Devices  
60A, 125/250V, 3 Pole, 4 Wire Grounding  
Plug



Features

- Catalog number, ratings and certifications molded in face
- Gripping ribs provide secure gripping area
- Supertough nylon housing

Ordering Information

| Description | Cord Diameter              | UPC          | Catalog Number |
|-------------|----------------------------|--------------|----------------|
| Plug, nylon | .625"-1.310<br>(15.9-33.3) | 783585015354 | HBL9461C       |

Listings


UL Listed File E1706  
CSA Certified

Specifications

|                |                                    |
|----------------|------------------------------------|
| Housing        | Supertough Nylon                   |
| Blade Holder   | Reinforced Thermoplastic Polyester |
| Blades         | Brass                              |
| Box Terminals  | Copper Alloy                       |
| Mounting Screw | Stainless steel                    |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #12 AWG through #4 AWG copper wire only                  |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA   |
| <b>Environmental</b>    |                                                          |
| Flammability            | UL 94 HB                                                 |
| IP Suitability          | IP20                                                     |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

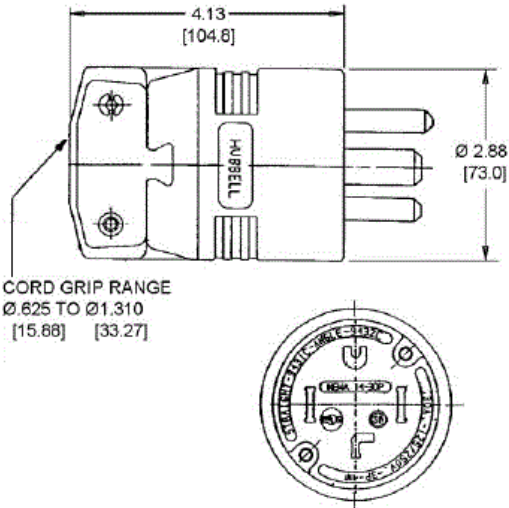

Resources

Customer Use Drawing  
eCatalog

