

M-9427

2

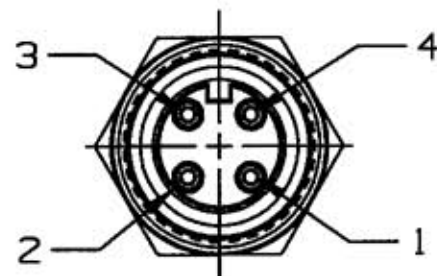


FIGURE 2


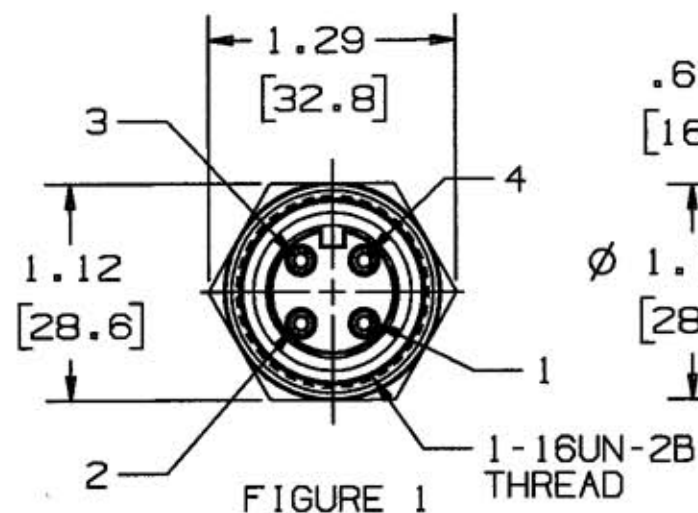


FIGURE 1

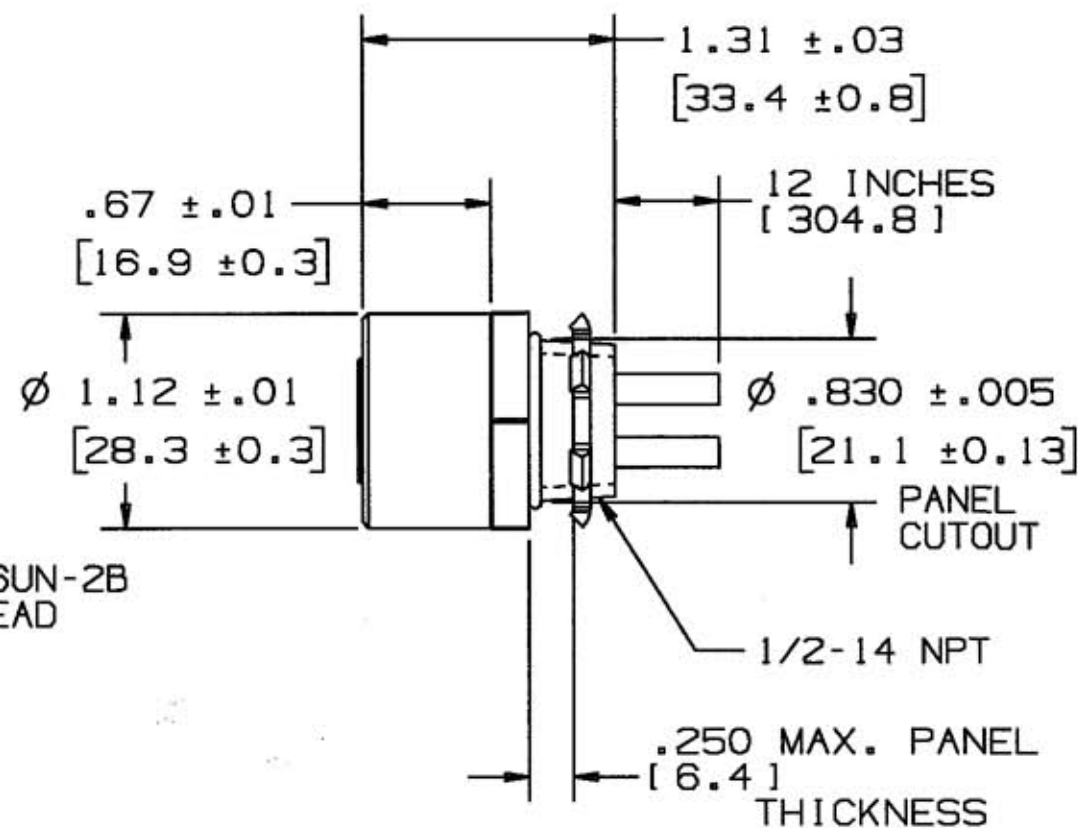

NOTES: UNLESS OTHERWISE SPECIFIED

1. UL LISTED (PRODUCT CATEGORY CYJV). NOT FOR CURRENT INTERRUPT, RATED 30A, 600V.
WIRE - LISTED TYPE (MTW).
2. DIMENSIONS ARE IN INCHES [mm].
3. THESE DEVICES SHALL CONFORM TO LINKOSITY SPECIFICATIONS -0015, -0021.
4. LINKOSITY™ IS A TRADEMARK OF LOCKHEED MARTIN.

CATALOG NO. (XXX INDICATES LENGTH)	FIGURE NO.	WIRE NO.	COLOR	NUMBER OF POLES	AMPS
RF3004PAXXX	1	1	BLACK	4	30
		2	BLACK		
		3	GREEN/YELLOW		
		4	BLACK		
RF3004PBXXX	2	1	BLACK	4	30
		2	WHITE		
		3	GREEN/YELLOW		
		4	BLACK		

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
RECEPTACLE SHELL	BRASS	NICKEL PLATE
INSULATOR	NYLON	WHITE
LOCKNUT	STEEL	ZINC
O-RING	RUBBER	BLACK
O-RING	RUBBER	BLACK
SOCKET CONTACT	COPPER ALLOY	GOLD OVER Pd/Ni
WIRE, 10 AWG	COPPER	STRANDS
POTTING COMPOUND		BLACK

DIMENSION SHEET FOR CAT. NO.
SEE TABLEREPAIRABLE ☐NON-REPAIRABLE ☒

B

M-9427

2

2	ADDED NOTES;REVISED TABLE; REVISED DIMS TO DUAL DIMS. & ADDED TOLS.;REVISED LIST OF PARTS PER DCN #12321 RCM	CAC	4/18/05
1	8/5/04 RELEASED PER DCN#11927 MJM RDK	RDK	8/5/04
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICETITLE
30A FEMALE RECEPTACLE ASSY (4P)
LINKOSITY™
HEX MOUNT, 600VTOLERANCES UNLESS
OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CTDR. BY MJM APP. BY RDK
TR. BY SCALE NONE
CHK'D BY RDK DATE 8/5/04