
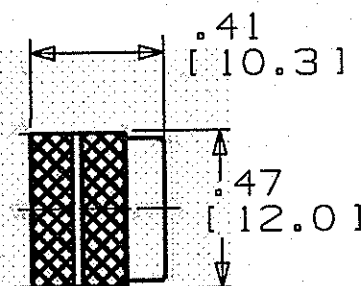


1



NOTES :

1. DIMENSIONS ARE INCHES [mm].
2. POLES/THROW: SPST,
3. CIRCUIT ARRANGEMENT: L1-L2-L1+L2-OFF.
4. NIPPLE MATERIAL: POLYCARBONATE, NIPPLE LENGTH: 0.29" [7.5].
5. NICKEL COVERED CHAIN AND KNURL NUT.
6. LEADS ARE 18 AWG AWM/TEW 105°C 600V, 6" LENGTH; STRIPPED 1/2".
7. UL RECOGNIZED; CSA APPROVED.
8. RATING: 3A, 250VAC, 3A, 125V "L" RATING
6A, 125VAC.
DIELECTRIC STRENGTH: 1,000V Meg (MINIMUM)
INSULATION RESISTANCE: 100 Meg Ohms
9. PACKAGING: SEALED IN POLYBAG.

CODE 74545

LIST OF PARTS

[illegible]

1	12/01/09 RELEASE TO PRODUCTION PER DCN 16198	CAC CAC	
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE	SPECIAL USE SWITCH PULL CHAIN, 2 CIRC, HD
-------	---

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 2^\circ$	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
	DR. BY CAC	APP. BY CAC
	TR. BY	SCALE NONE
	CHK'D BY	DATE 04/01/09

DIMENSION SHEET FOR CAT. NO.

RLIN

REPAIRABLE ☐NON-REPAIRABLE ☒

12

M11299

1