
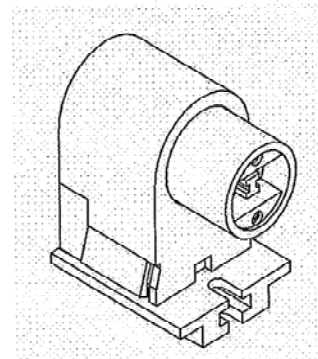


1

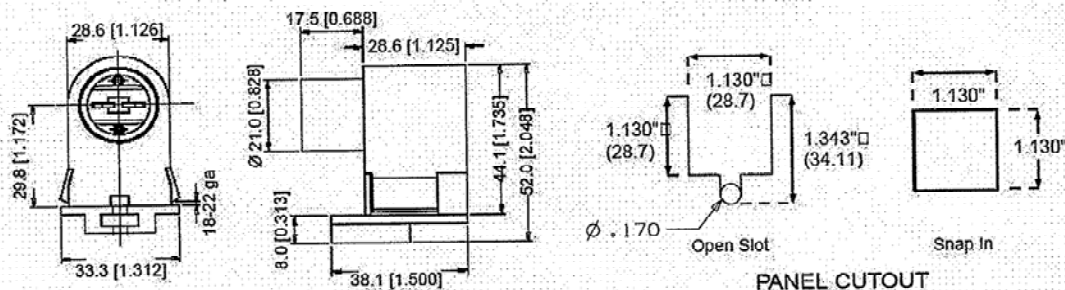

NOTES:

1. DIMENSIONS ARE mm (INCHES). FOR PANEL CUTOUT DIMENSIONS ARE INCHES(mm).
2. MADE FROM POLYCARBONATE. FLEXIBLE SNAP-IN WINGS FOR QUICK EASY INSERTION INTO PANEL.
3. FOR USE WITH 60-112W, T17/12/10J LAMPS.
QUICK CONNECT PUSH-IN WIRE TERMINALS ACCEPT 18 AWG SOLID OR SOLDER DIPPED LEADS, STRIPPED 3/8".
MAXIMUM 6.5 LBS. CONDUCTOR INSERTION FORCE.
4. TWO WIRE PORTS PER TERMINAL TO SPEED HARNESS WIRING.
ACCOMMODATE PANEL THICKNESS .91 - 1.21mm (.036-.048 IN.)
5. c UL US LISTED; c CSA US CERTIFIED.
RATED 660W MAX., 600V MAX. ON SPRING END.
6. PACKAGING: SEALED IN POLYBAG.
7. DIMENSIONAL TOLERANCES: $\pm 0.05"$, $\pm 0.010"$.

[illegible]