

M-9426|2

FIGURE 2

| WIRE | COLOR        |
|------|--------------|
| 1    | BLACK        |
| 2    | WHITE        |
| 3    | GREEN/YELLOW |
| 4    | BLACK        |



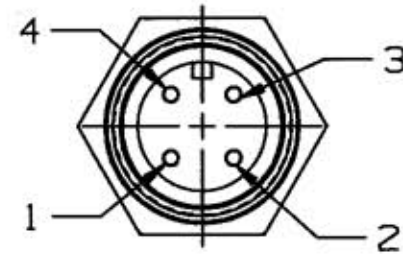


FIGURE 1

| WIRE | COLOR        |
|------|--------------|
| 1    | BLACK        |
| 2    | BLACK        |
| 3    | GREEN/YELLOW |
| 4    | BLACK        |

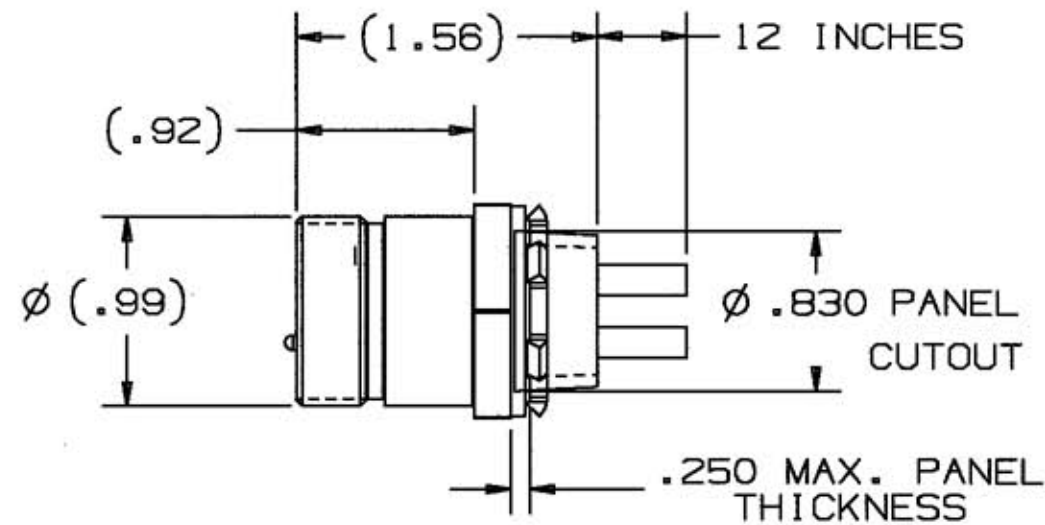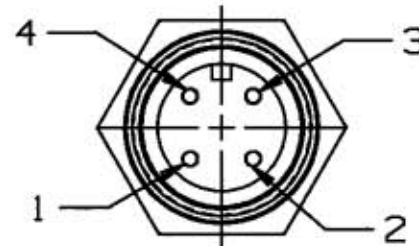

| CATALOG NUMBER<br>(XXX INDICATES LENGTH) | SEE FIGURE NUMBER | NUMBER OF POLES | AMPS |
|------------------------------------------|-------------------|-----------------|------|
| RM3004PAXXX                              | 1                 | 4               | 30   |
| RM3004PBXXX                              | 2                 | 4               | 30   |

LIST OF PARTS

| DESCRIPTION      | MATERIAL     | FINISH          |
|------------------|--------------|-----------------|
| RECEPTACLE SHELL | BRASS        | NICKEL          |
| INSULATOR        | NYLON        | WHITE           |
| LOCKNUT          | STEEL        | ZINC            |
| GASKET           |              | YELLOW          |
| SOCKET CONTACT   | COPPER ALLOY | GOLD OVER Pd/Ni |
| WIRE             | 12 AWG       |                 |

|   |                                                                                    |     |        |
|---|------------------------------------------------------------------------------------|-----|--------|
| 2 | 12/14/04 REVISED CHANGED DIMS. FROM 1.44 TO 1.56 FROM .80 TO .92 PER DCN 12131 CAC |     |        |
| 1 | 8/4/04 RELEASED PER EC#11927 MJM RDK                                               | RDK | 8/5/04 |

| SYM | REVISIONS | APP | DATE |
|-----|-----------|-----|------|
|-----|-----------|-----|------|

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
30A MALE RECEPTACLE ASSY. (4P)

|                                       |                                                           |
|---------------------------------------|-----------------------------------------------------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED | WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT |
| FRACTIONS ± 1/64                      | DR. BY MJM APP. BY                                        |
| DECIMALS ± .005                       | TR. BY SCALE 2:1                                          |
| ANGLES ± 2°                           | CHK'D BY DATE 8/5/04                                      |