
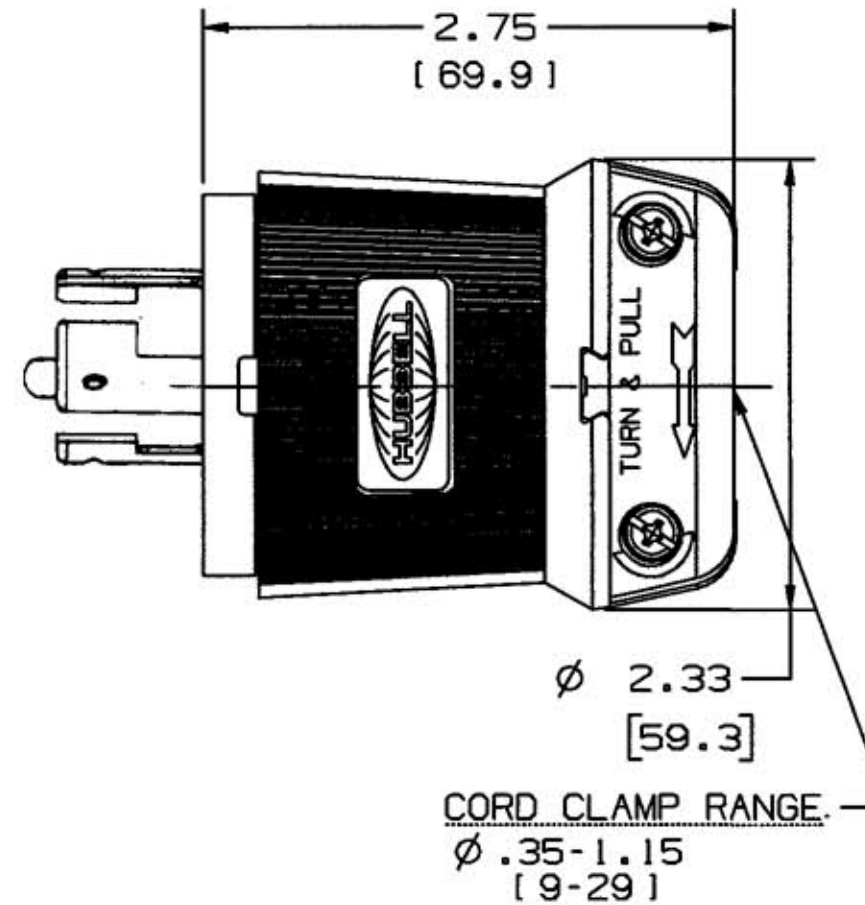


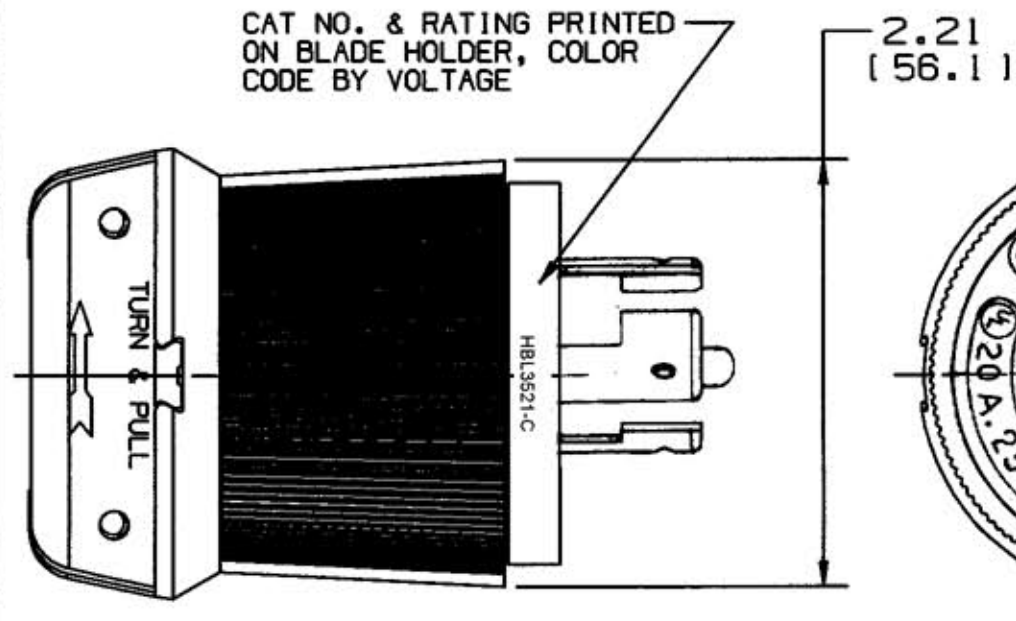

LEGEND:

IN.
[mm]

NOTES:

1. ALL SCREWS ARE COMBINATION PHILLIPS/SLOTTED/ROBERTSON HEAD.
2. > INDICATES EVALUATED BY UL IN ACCORDANCE WITH IEC 309-1

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BLADE HOLDER	NYLON	NATURAL
RETAINER	POLY CARBONATE	CLEAR
COVER	NYLON	BLACK
WIRE CLAMPS	.080 C.R.S.	NICKEL PLATE
BLADES	.060 BRASS	
TERMINAL SCREWS	BRASS	**
GROUND PIN	BRASS	
CENTER TERMINAL	BRASS	GREEN
CORD CLAMPS	NYLON	NATURAL

WHITE- NEUTRAL
BRASS- LINE (3)

4	UPDATED VIEWS, RETAINER MAT. POLY WAS LEXAN, ADDED HBL SUFFIX TO CAT. NO. PER DCN 8996 MYA	CJC	10/16/01
3	NUMEROUS CHANGES, SEE RECORD. PRINT PER DCN #114. D3G	JZ	6-13-96
2	TABLE ADDED PER DCN 2741	1/1/88	8-26-94 (22)
1	T6 & 4 DIM. WAS 2" 2 1/4 DIM. WAS 2 7/32 ADDED WITH C.S.A. MARKING	MOB	3-9-90 AUL
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 20A 250V. A.C. OR D.C. 10A. 600V. A.C.
4 POLE 5 WIRE TWIST-LOCK PLUG
NON-NEMA

 TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 2^\circ$ 	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
	DR. BY A.J.L.	APP. BY
	TR. BY	SCALE FULL
	CHK'D BY	DATE 3/22/83