


M-6266

2

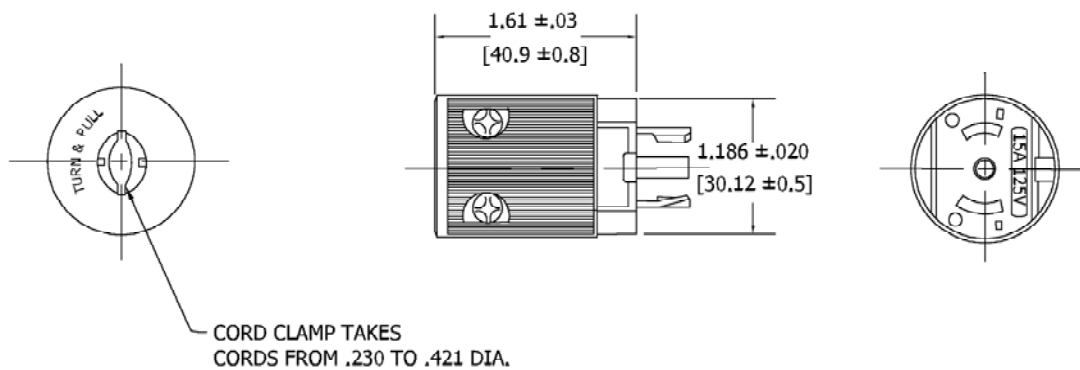

| CAT No.  | CONFIGURATION                                                                                  | RATING                                 |
|----------|------------------------------------------------------------------------------------------------|----------------------------------------|
| HBL7485V | NEMA ML-3P  | 15A<br>125/250V AC<br>3-POLE, 3-WIRE   |
| HBL7594V | NEMA ML-2P  | 15A<br>125V AC OR DC<br>2-POLE, 3-WIRE |

NOTE: INCHES  
[mm]

## LIST OF PARTS

| DESCRIPTION     | MATERIAL    | FINISH      |
|-----------------|-------------|-------------|
| HOUSING         | NYLON ZYTEL | BLACK       |
| BLADES          | BRASS       |             |
| CENTER CONTACT  | BRASS       |             |
| PAN HEAD SCREWS | STEEL       | BLACK OXIDE |

SUPERSEDES DRAWING DATED 6-8-81

|     |                                                                                                                    |     |        |
|-----|--------------------------------------------------------------------------------------------------------------------|-----|--------|
| 2   | UPDATED TO NEW FORMAT, ADDED HBL TO CAT #'S IN TABLE<br>CHANGED DIM'S FROM FRACTIONS TO DECIMAL PER DCN 20311. MYA | DJP | 2-6-14 |
| SYM | DESCRIPTION                                                                                                        | APP | DATE   |

THE DESIGN AND DIMENSIONS OF THE  
PRODUCT SHOWN ON THIS DRAWING ARE  
SUBJECT TO CHANGE WITHOUT NOTICE

## TITLE

15A VALISE MIDGET  
TWIST-LOCK PLUG

TOLERANCES UNLESS  
OTHERWISE SPECIFIED  
FRACTIONS  $\pm 1/64$   
DECIMALS  $\pm .005$   
ANGLES  $\pm 2^\circ$

WORKING DEVICE-HUBBELLS  
HUBBELL INCORPORATED  
SHELTON, CT

|          |      |         |        |
|----------|------|---------|--------|
| DR. BY   | P.M. | APP. BY | DJP    |
| TR. BY   | MYA  | SCALE   | 1:1    |
| CHK'D BY | DJP  | DATE    | 2/6/14 |

DIVISION SHEET FOR CAT. NO.  
SEE TABLE

REPAIRABLE



NON-REPAIRABLE



B

M-6266

2