

Wallplates and Covers

Features and Benefits

Stainless Steel Wallplates

Provide solutions for a variety of industrial and commercial applications.

302/304 Type Stainless Steel

Non-magnetic: 18.0% Chromium
8.0% Nickel

- Ideal for highly corrosive environments such as hospitals, food processing, static free requirements and more
- Environments subjected to heavy abuse

430 Type Stainless Steel

Magnetic: 17.0% Chromium
Less than 0.5% Nickel


- Aesthetically identical to the 302/304 type stainless steel wallplates and are best suited for environments where corrosion resistance is less critical
- Standard commercial use

Smooth Solid Brass

- Provides a plush appearance with the durability of metal
- Finish is lacquer coated to inhibit oxidation

Anodized Aluminum

- Non-magnetic and corrosion resistance for a wide range of applications
- Finish is lacquer coated to inhibit oxidation

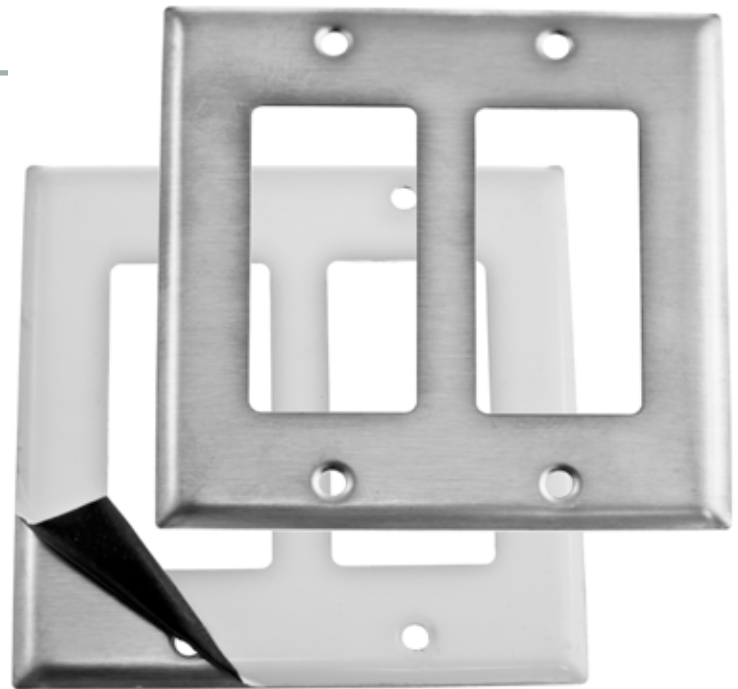

Decorator
(Protective plastic film helps to prevent scratches and damage)



Extra-Duty Metallic While-in-Use Covers

These covers are designed for use whenever protection is required while an outlet is in use. Covers meet or exceed the extra-duty rating per UL 514D, and are NEMA 3R rated.

- Die-cast aluminum construction
- Powder coated “chip resistant” paint corrosion protection
- Unique plug management provision for securing device and cord

2017 National Electrical Code (NEC®) Requirement

406.9 Receptacles in Damp or Wet Locations.

(B) Wet Locations.

(1) 15 and 20 Ampere Receptacles in a Wet Location. 15 and 20 ampere, 125 and 250 volt receptacles installed in a wet location shall have an enclosure that is weatherproof whether or not the attachment plug cap is inserted. An outlet box hood installed for this purpose shall be listed, and shall be identified as “extra-duty.” Other listed products, enclosures, or assemblies providing weatherproof protection that do not utilize an outlet box need not be marked “extra-duty.” All 15 and 20 ampere, 125 and 250 volt nonlocking-type receptacles shall be listed weather-resistant type.

Exception: 15 and 20 ampere, 125 through 250 volt receptacles installed in a wet location and subject to routine high-pressure spray washing shall be permitted to have an enclosure that is weatherproof when the attachment plug is removed.

(2) Other Receptacles. All other receptacles installed in a wet location shall comply with (B)(2)(a) or (B)(2)(b).

(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug cap inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g., portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

Blank Wallplates, Box Mount

Description	Color	Nylon Standard	Nylon Mid-Size	Nylon Jumbo	Material	Metal Catalog Number
1-Gang, 1-Blank, Box Mount 	Black	NP13BK	NPJ13BK	-	Aluminum	SA13A
	Brown	NP13	NPJ13	-	Brass	SB13
	Gray	NP13GY	NPJ13GY	-	Brass Plated	SBP13
	Ivory	NP13I	NPJ13I	NPJJ13I	Chrome	SCH13
	Light Almond	NP13LA	NPJ13LA	NPJJ13LA	S/S 302/304	SS13
	Office White	NP13OW	NPJ13OW	-	S/S 430	SS13L
	White	NP13W	NPJ13W	NPJJ13W		
2-Gang, 2-Blank, Box Mount 	Black	NP23BK	-	-	Aluminum	SA23
	Brown	NP23	NPJ23	-	Brass	SB23
	Gray	NP23GY	-	-	Brass Plated	①
	Ivory	NP23I	NPJ23I	-	Chrome	SCH23
	Light Almond	NP23LA	NPJ23LA	-	S/S 302/304	SS23
	White	NP23W	NPJ23W	-	S/S 430	SS23L
3-Gang, 3-Blank, Box Mount 	Brown	NP33	-	-	Aluminum	①
	Ivory	NP33I	-	-	Brass	①
	White	NP33W	-	-	Brass Plated	①
					Chrome	①
					S/S 302/304	SS33
4-Gang, 4-Blank, Box Mount 	Brown	NP43	-	-	Aluminum	①
	Ivory	NP43I	-	-	Brass	①
	White	NP43W	-	-	Brass Plated	①
					Chrome	①
					S/S 302/304	SS43
					S/S 430	-

Blank Wallplates, Strap Mount

1-Gang, 1-Blank, Strap Mount 	Black	NP14BK	-	-	Aluminum	①
	Brown	NP14	-	-	Brass	SB14
	Gray	NP14GY	-	-	Brass Plated	①
	Ivory	NP14I	-	-	Chrome	①
	Office White	NP14OW	-	-	S/S 302/304	SS14
	Red	NP14R	-	-	S/S 430	SS14L
	White	NP14W	-	-		
2-Gang, 2-Blank, Strap Mount 	Black	NP24BK	-	-	Aluminum	①
	Brown	NP24	-	-	Brass	①
	Gray	NP24GY	-	-	Brass Plated	①
	Ivory	NP24I	-	-	Chrome	①
	Office White	NP24OW	-	-	S/S 302/304	SS24
	Red	NP24R	-	-	S/S 430	SS24L
	White	NP24W	-	-		
3-Gang, 3-Blank, Strap Mount 	Brown	NP34	-	-	Aluminum	①
	Ivory	NP34I	-	-	Brass	①
	White	NP34W	-	-	Brass Plated	①
					Chrome	①
4-Gang, 4-Blank, Strap Mount 	Brown	NP44	-	-	S/S 302/304	SS34
	Ivory	NP44I	-	-	S/S 430	-
	White	NP44W	-	-		
					Aluminum	①
					Brass	①
					Brass Plated	①
					Chrome	①
					S/S 302/304	SS44
					S/S 430	-

Note: All nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages O-33 to O-36. Consult custom wallplates section for additional openings and combinations.

Dimensions in Inches (mm)