



Number of contacts

16+

16 A 400/690 V 6 kV 3
+ 2 additional relay contacts

Han
Hv E


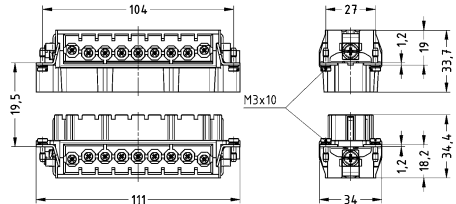




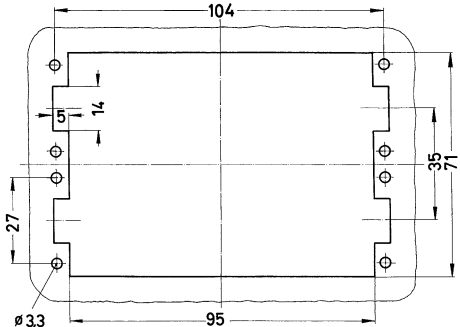
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated	0.75 ... 2.5	09 34 016 2601	09 34 016 2701	 M F Contact arrangement (view from termination side) Han® 16 Hv E ♦ Power contacts ● Relay contact ○ Without contact Panel cut out for use without Hoods/Housings

Number of contacts

32+ 

16 A 400/690 V 6 kV 3
+ 4 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated  You need two inserts for a complete assembly!	0.75 ... 2.5	09 34 016 2601	09 34 016 2701	  M F Contact arrangement (view from termination side) Han® 32 Hv E ◆ Power contacts ● Relay contact ○ Without contact  Panel cut out for use without Hoods/Housings