

# Straight Blade Devices

## Accessories

For 15 and 20 Ampere, 125 and 250 Volts and 277 Volts AC Devices



### Wallplates, 1-Gang

| Description                                                        | Color        | Duplex Receptacle | Style Line® Receptacle | Single Receptacle Plate 1.40 in. (35.6) Dia. |
|--------------------------------------------------------------------|--------------|-------------------|------------------------|----------------------------------------------|
| Thermoplastic, smooth.                                             | Black        | <b>P8BK</b>       | <b>P26BK</b>           | <b>P7BK</b>                                  |
|                                                                    | Brown        | <b>P8</b>         | <b>P26</b>             | <b>P7</b>                                    |
|                                                                    | Gray         | <b>P8GY</b>       | <b>P26GY</b>           | <b>P7GY</b>                                  |
|                                                                    | Ivory        | <b>P8I</b>        | <b>P26I</b>            | <b>P7I</b>                                   |
|                                                                    | Light Almond | <b>P8LA</b>       | <b>P26LA</b>           | <b>P7LA</b>                                  |
|                                                                    | Orange       | <b>P8OR</b>       | –                      | –                                            |
|                                                                    | Red          | <b>P8R</b>        | <b>P26R</b>            | <b>P7R</b>                                   |
|                                                                    | White        | <b>P8W</b>        | <b>P26W</b>            | <b>P7W</b>                                   |
| Stainless steel 302/304, .035 in. (0.9) horizontal brushed finish. |              | <b>SS8</b>        | <b>SS26</b>            | <b>SS7</b>                                   |
| Brass .04 in. (1.0), horizontal brushed finish.                    |              | <b>SB8</b>        | <b>SB26</b>            | <b>SB7</b>                                   |
| Aluminum .05 in. (1.3), horizontal brushed finish.                 |              | <b>SA8</b>        | –                      | <b>SA7</b>                                   |



**P8**



**P26I**



**SS7**

### Weatherproof Covers

| Description                           | Duplex Receptacle | Single Receptacle Plate 1.40 in. (35.6) Dia. |
|---------------------------------------|-------------------|----------------------------------------------|
| RTP, gray, for FS/FD box mounting.    | <b>HBL5221</b>    | <b>HBL7423WO</b>                             |
| RTP, yellow, for FS/FD box mounting.  | <b>HBL52CM21</b>  | <b>HBL74CM23WO</b>                           |
| RTP, gray, for device mounting.       | <b>HBL5222</b>    | –                                            |
| RTP, yellow, for device mounting.     | <b>HBL52CM22</b>  | –                                            |
| Cast aluminum for FS/FD box mounting. | <b>HBL5206WO</b>  | <b>HBL7420</b>                               |
| Cast aluminum for device mounting.    | <b>HBL5205WO</b>  | –                                            |

*Note: All weatherproof plates are UL Listed for Wet Locations.  
Those with suffix WO are listed for use with cover open, all others with cover closed.  
RTP is an abbreviation for reinforced thermoplastic polyester.  
See section O for additional information on cover plates.*



**HBL52CM22**



**HBL5206WO**



**HBL7423WO**

Dimensions in Inches (mm)

## Accessories for 15 Amp 2 and 3 Wire Devices



P8



SS7



HBL5206WO



HBL5221



HBL7423WO



WP1

### Wallplates, 1-Gang

| Description                                                         | Color          | Duplex Receptacles      | Single Receptacles with Face Dia. 1.40" (35.6) |
|---------------------------------------------------------------------|----------------|-------------------------|------------------------------------------------|
| Nylon, smooth.                                                      | Brown<br>Ivory | <b>P8</b><br><b>P8I</b> | <b>P7</b><br><b>P7I</b>                        |
| Stainless steel 302/304, .035 in. (0.9), horizontal brushed finish. |                | <b>SS8</b>              | <b>SS7</b>                                     |
| Stainless steel 430, .035 in. (0.9), horizontal brushed finish.     |                | <b>SS8L</b>             | <b>SS7L</b>                                    |
| Brass .04 in. (1.0), horizontal brushed finish.                     |                | <b>SB8</b>              | <b>SB7</b>                                     |
| Aluminum .05 in. (1.3), horizontal brushed finish.                  |                | <b>SA8</b>              | <b>SA7</b>                                     |

### IP44

SUITABILITY

### Weatherproof Covers

| Description                                                           | Duplex Receptacles | Single Receptacles with Face Dia. 1.40" (35.6) |
|-----------------------------------------------------------------------|--------------------|------------------------------------------------|
| Cast aluminum, for standard horizontal box mount.                     | <b>HBL5205WO</b>   | –                                              |
| Same as above except FS/FD box mount.                                 | <b>HBL5206WO</b>   | –                                              |
| Cast aluminum vertical FS/FD box mount.                               | –                  | <b>HBL7420</b>                                 |
| Gray thermoplastic, vertical standard box mount, corrosion resistant. | <b>HBL5222</b>     | –                                              |
| Same as above except yellow.                                          | <b>HBL52CM22</b>   | –                                              |
| Gray thermoplastic, vertical FS/FD box mount, corrosion resistant.    | <b>HBL5221</b>     | <b>HBL7423WO</b>                               |
| Yellow thermoplastic, vertical FS/FD box mount, corrosion resistant.  | <b>HBL52CM21</b>   | <b>HBL74CM23WO</b>                             |
| White thermoplastic, vertical FS/FD box mount, corrosion resistant.   | <b>HBL52CM21W</b>  | –                                              |

### IP44

SUITABILITY

### Weatherproof Covers for 15A Nylon Flanged Receptacles and Inlets

| Description                              | Duplex Receptacles | Single Receptacles with Face Dia. 1.40" (35.6) |
|------------------------------------------|--------------------|------------------------------------------------|
| Gray thermoplastic, corrosion resistant. | –                  | <b>WP1</b>                                     |

Note: All weatherproof covers listed above are UL Listed for wet and damp locations with cover closed.

Those with suffix WO are UL Listed with cover open.

See page O-23 for additional information on weatherproof covers.


# Wallplates and Covers

## Features and Benefits

### Non-metallic Wallplates

Hubbell's line of polycarbonate wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with easy to clean finish in all different types of environments.

- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size, jumbo and pre-marked
- Smooth satin finish, blends into the wall
- More rigid, sharper lines
- Captive screw feature holds mounting screw in place for quick and easy installation, single gang
- High-impact polycarbonate thermoplastic is virtually unbreakable
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments
- cULus listed

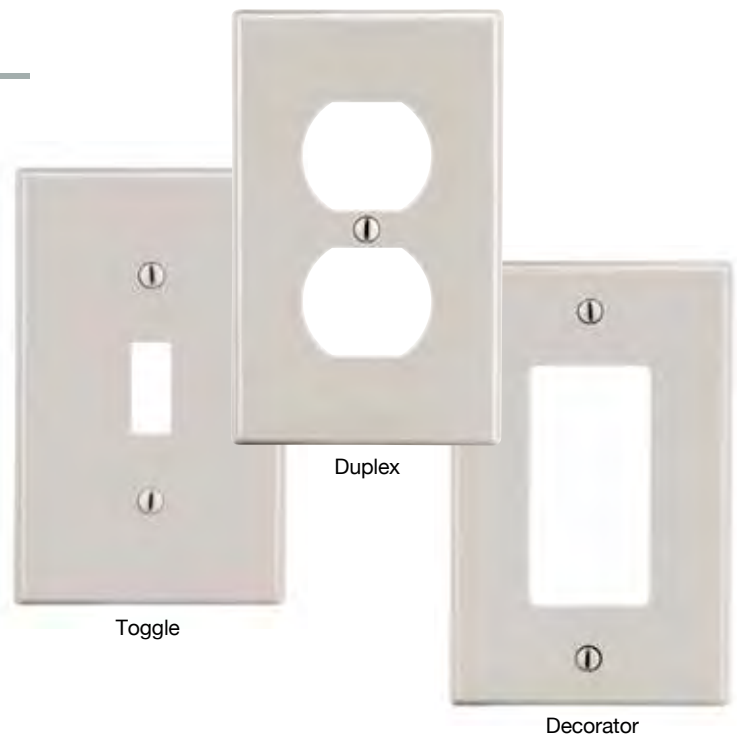

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work. See page O-32 for details and dimensions.


### Non-metallic Wallplates




### Non-metallic Pre-Marked Wallplates



### Metal Wallplates

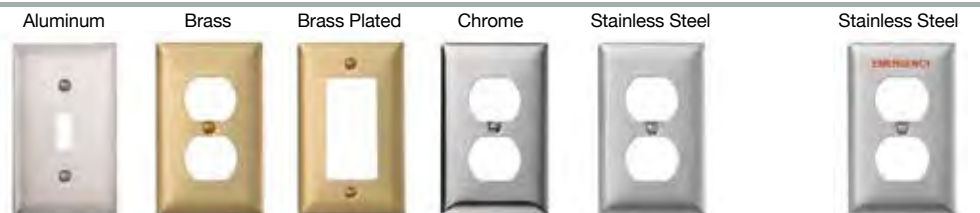

## Duplex Receptacle Wallplates

| Description                                                                                             | Color        | Thermoplastic |               |                | Material     | Metal Catalog Number |
|---------------------------------------------------------------------------------------------------------|--------------|---------------|---------------|----------------|--------------|----------------------|
|                                                                                                         |              | Standard      | Mid-Size      | Jumbo          |              |                      |
| 1-Gang, 1-Duplex<br>   | Black        | <b>P8BK</b>   | <b>PJ8BK</b>  | —              | Aluminum     | <b>SA8</b>           |
|                                                                                                         | Blue         | —             | <b>PJ8BL</b>  | —              | Brass        | <b>SB8</b>           |
|                                                                                                         | Brown        | <b>P8</b>     | <b>PJ8</b>    | —              | Brass Plated | <b>SBP8</b>          |
|                                                                                                         | Gray         | <b>P8GY</b>   | <b>PJ8GY</b>  | —              | Chrome       | <b>SCH8</b>          |
|                                                                                                         | Ivory        | <b>P8I</b>    | <b>PJ8I</b>   | <b>NPJJ8I</b>  | S/S 302/304  | <b>SS8</b>           |
|                                                                                                         | Light Almond | <b>P8LA</b>   | <b>PJ8LA</b>  | <b>NPJJ8LA</b> | S/S 430      | <b>SS8L</b>          |
|                                                                                                         | Orange       | <b>P8OR</b>   | —             | —              |              |                      |
|                                                                                                         | Red          | <b>P8R</b>    | <b>PJ8R</b>   | —              |              |                      |
|                                                                                                         | White        | <b>P8W</b>    | <b>PJ8W</b>   | <b>NJJ8W</b>   |              |                      |
| 2-Gang, 2-Duplex<br>   | Black        | <b>P82BK</b>  | <b>PJ82BK</b> | —              | Aluminum     | <b>SA82</b>          |
|                                                                                                         | Brown        | <b>P82</b>    | —             | —              | Brass        | <b>SB82</b>          |
|                                                                                                         | Gray         | <b>P82GY</b>  | <b>PJ82GY</b> | —              | Brass Plated | <b>SBP82</b>         |
|                                                                                                         | Ivory        | <b>P82I</b>   | <b>PJ82I</b>  | —              | Chrome       | <b>SCH82</b>         |
|                                                                                                         | Light Almond | <b>P82LA</b>  | <b>PJ82LA</b> | —              | S/S 302/304  | <b>SS82</b>          |
|                                                                                                         | Orange       | <b>P82OR</b>  | —             | —              | S/S 430      | <b>SS82L</b>         |
|                                                                                                         | Red          | <b>P82R</b>   | <b>PJ82R</b>  | —              |              |                      |
|                                                                                                         | White        | <b>P82W</b>   | <b>PJ82W</b>  | —              |              |                      |
| 3-Gang, 3-Duplex<br>   | Ivory        | <b>P83I</b>   | —             | —              | Aluminum     | ①                    |
|                                                                                                         | White        | <b>P83W</b>   | —             | —              | Brass        | ①                    |
|                                                                                                         |              |               |               |                | Brass Plated | ①                    |
|                                                                                                         |              |               |               |                | Chrome       | ①                    |
|                                                                                                         |              |               |               |                | S/S 302/304  | <b>SS83</b>          |
| 4-Gang, 4-Duplex<br>  |              |               |               |                | S/S 430      | —                    |
|                                                                                                         |              |               |               |                | Aluminum     | ①                    |
|                                                                                                         |              |               |               |                | Brass        | ①                    |
|                                                                                                         |              |               |               |                | Brass Plated | ①                    |
|                                                                                                         |              |               |               |                | Chrome       | ①                    |
| 2-Gang, 1-Duplex<br> |              |               |               |                | S/S 302/304  | <b>SS84</b>          |
|                                                                                                         |              |               |               |                | S/S 430      | —                    |
|                                                                                                         |              |               |               |                | Brass        | —                    |
|                                                                                                         |              |               |               |                | Brass Plated | —                    |
|                                                                                                         |              |               |               |                | Chrome       | —                    |
|                                                                                                         |              |               |               |                | S/S 302/304  | <b>SS748</b>         |
|                                                                                                         |              |               |               |                | S/S 430      | —                    |

## Single 15/20A Straight Blade or 15A Twist-Lock® Receptacle Wallplates

| Description                                                                                                                       | Color        | Thermoplastic |              |       | Material     | Metal Catalog Number |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------|---------------|--------------|-------|--------------|----------------------|
|                                                                                                                                   |              | Standard      | Mid-Size     | Jumbo |              |                      |
| 1-Gang, 1-Single 1.40 in. (35.6) Dia. Hole<br> | Black        | <b>P7BK</b>   | —            | —     | Aluminum     | <b>SA7</b>           |
|                                                                                                                                   | Brown        | <b>P7</b>     | —            | —     | Brass        | <b>SB7</b>           |
|                                                                                                                                   | Gray         | <b>P7GY</b>   | —            | —     | Brass Plated | <b>SBP7</b>          |
|                                                                                                                                   | Ivory        | <b>P7I</b>    | <b>PJ7I</b>  | —     | Chrome       | <b>SCH7</b>          |
|                                                                                                                                   | Light Almond | <b>P7LA</b>   | <b>PJ7LA</b> | —     | S/S 302/304  | <b>SS7</b>           |
|                                                                                                                                   | Red          | <b>P7R</b>    | —            | —     | S/S 430      | <b>SS7L</b>          |
|                                                                                                                                   | White        | <b>P7W</b>    | <b>PJ7W</b>  | —     |              |                      |
| 2-Gang, 1-Single 1.40 in. (35.6) Dia. Hole<br> |              |               |              |       | Aluminum     | —                    |
|                                                                                                                                   |              |               |              |       | Brass        | —                    |
|                                                                                                                                   |              |               |              |       | Brass Plated | —                    |
|                                                                                                                                   |              |               |              |       | Chrome       | —                    |
|                                                                                                                                   |              |               |              |       | S/S 302/304  | <b>SS747</b>         |
|                                                                                                                                   |              |               |              |       | S/S 430      | —                    |
| 2-Gang, 2-Single 1.40 in. (35.6) Dia. Hole<br> |              |               |              |       | Aluminum     | ①                    |
|                                                                                                                                   |              |               |              |       | Brass        | ①                    |
|                                                                                                                                   |              |               |              |       | Brass Plated | ①                    |
|                                                                                                                                   |              |               |              |       | Chrome       | ①                    |
|                                                                                                                                   |              |               |              |       | S/S 302/304  | <b>SS72</b>          |
|                                                                                                                                   |              |               |              |       | S/S 430      | —                    |

Note: Thermoplastic wallplates feature pre-inserted captive screws for faster assembly in single gang configurations.

① Available as a custom wallplate, see pages O-32 to O-34. Consult custom wallplates section for additional openings and combinations.

Dimensions in Inches (mm)

## Brass Locking Cover Plate

| Description                                                                                                                                                           | Catalog Number  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Locking cover plate for single 15 and 20A straight blade receptacles and 15A Twist-Lock® receptacles.<br>Straight cylinder type lock. All cylinder locks keyed alike. | <b>HBL96067</b> |



**HBL96067**  
Shown with receptacle  
(sold separately)



**HBL6187**  
Shown with receptacle  
and back box  
(sold separately)

## Weather Shield Wallplate

| Description                                 | Catalog Number |
|---------------------------------------------|----------------|
| 20° angle wallplate for duplex receptacles. | <b>HBL6187</b> |

## Catalog Number of Receptacles in Groups A through E below

| Group A                                           |                  | Group B                                           |                  |                  | Group C                                           | Group D                                           |                                                       | Group E                                           |
|---------------------------------------------------|------------------|---------------------------------------------------|------------------|------------------|---------------------------------------------------|---------------------------------------------------|-------------------------------------------------------|---------------------------------------------------|
| Boss diameter<br>1.36" to 1.39"<br>(34.5 to 35.3) |                  | Boss diameter<br>1.55" to 1.58"<br>(39.4 to 40.1) |                  |                  | Boss diameter<br>1.68" to 1.72"<br>(42.7 to 43.7) | Boss diameter<br>2.09" to 2.13"<br>(53.1 to 54.1) |                                                       | Boss diameter<br>2.28" to 2.44"<br>(57.9 to 62.0) |
| <b>HBL23000HG</b>                                 | <b>HBL5661</b>   | <b>HBL23CM10</b>                                  | <b>HBL2530</b>   | <b>HBL2770</b>   | <b>HBL45105</b>                                   | <b>HBL7962</b>                                    | <b>HBL9360•</b><br><b>HBL9365•</b><br><b>HBL9367•</b> | <b>HBL7301A</b>                                   |
| <b>HBL23030</b>                                   | <b>HBL6810</b>   | <b>HBL2310</b>                                    | <b>HBL26CM10</b> | <b>HBL2810</b>   | <b>HBL45205</b>                                   | <b>HBL9350</b>                                    |                                                       | <b>HBL8330A</b>                                   |
| <b>HBL4560</b>                                    | <b>HBL7210B</b>  | <b>HBL2320</b>                                    | <b>HBL2610</b>   | <b>HBL2820</b>   | <b>HBL45305</b>                                   | <b>HBL9308</b>                                    |                                                       | <b>HBL8350A</b>                                   |
| <b>HBL4710</b>                                    | <b>HBL7250</b>   | <b>HBL2330</b>                                    | <b>HBL2620</b>   | <b>HBL2830</b>   | <b>HBL45905</b>                                   | <b>HBL9315</b>                                    |                                                       | <b>HBL8430A</b>                                   |
| <b>HBL4760</b>                                    | <b>HBL7310B</b>  | <b>HBL2340</b>                                    | <b>HBL2630</b>   | <b>HBL3330</b>   |                                                   | <b>HBL9330</b>                                    |                                                       | <b>HBL8450A</b>                                   |
| <b>HBL5251</b>                                    | <b>HBL7310BG</b> | <b>HBL2410</b>                                    | <b>HBL2640</b>   | <b>HBL3330G</b>  |                                                   | <b>HBL9360•</b>                                   |                                                       | <b>HBL8460A</b>                                   |
| <b>HBL52CM61</b>                                  | <b>HBL7535</b>   | <b>HBL2420</b>                                    | <b>HBL2650</b>   | <b>HBL3430</b>   |                                                   | <b>HBL9365•</b>                                   |                                                       | <b>HBL9430A</b>                                   |
| <b>HBL5261</b>                                    | <b>HBL7582</b>   | <b>HBL2430</b>                                    | <b>HBL2710</b>   | <b>HBL3430G</b>  |                                                   | <b>HBL9367•</b>                                   |                                                       | <b>HBL9450A</b>                                   |
| <b>HBL53CM61</b>                                  | <b>HBL8210</b>   | <b>HBL2440</b>                                    | <b>HBL2720</b>   | <b>HBL3520</b>   |                                                   |                                                   |                                                       | <b>HBL9460A</b>                                   |
| <b>HBL5361</b>                                    | <b>HBL8310</b>   | <b>HBL2450</b>                                    | <b>HBL2730</b>   | <b>HBL7410B</b>  |                                                   |                                                   |                                                       |                                                   |
| <b>HBL5461</b>                                    | <b>HBL8410</b>   | <b>HBL2460</b>                                    | <b>HBL2740</b>   | <b>HBL7410BG</b> |                                                   |                                                   |                                                       |                                                   |
| <b>HBL5552B</b>                                   | <b>HBL8420</b>   | <b>HBL2510</b>                                    | <b>HBL2750</b>   |                  |                                                   |                                                   |                                                       |                                                   |
|                                                   |                  | <b>HBL2520</b>                                    | <b>HBL2760</b>   |                  |                                                   |                                                   |                                                       |                                                   |

Note: •50A 2P 3W.

## Wallplates for Single Receptacles

| Description                          | Group A                                           |             | Group B                                           |        | Group C                                           |        | Group D                                           |              | Group E                                           |
|--------------------------------------|---------------------------------------------------|-------------|---------------------------------------------------|--------|---------------------------------------------------|--------|---------------------------------------------------|--------------|---------------------------------------------------|
|                                      | Boss diameter<br>1.36" to 1.39"<br>(34.5 to 35.3) |             | Boss diameter<br>1.55" to 1.58"<br>(39.4 to 40.1) |        | Boss diameter<br>1.68" to 1.72"<br>(42.7 to 43.7) |        | Boss diameter<br>2.09" to 2.13"<br>(53.1 to 54.1) |              | Boss diameter<br>2.28" to 2.44"<br>(57.9 to 62.0) |
|                                      | 1-Gang                                            | 2-Gang      | 1-Gang                                            | 2-Gang | 1-Gang                                            | 2-Gang | 1-Gang                                            | 2-Gang       | 2-Gang                                            |
| Smooth thermoplastic.                | <b>P7*</b>                                        | –           | <b>P720*</b>                                      | –      | –                                                 | –      | <b>P724*</b>                                      | <b>P703*</b> | –                                                 |
| Cast aluminum.                       | <b>HBL7320</b>                                    | –           | <b>HBL7320</b>                                    | –      | <b>HBL3394</b>                                    | –      | <b>HBL9419</b>                                    | –            | –                                                 |
| Stainless steel,<br>302/304, smooth. | <b>SS7**</b>                                      | <b>SS72</b> | <b>SS720</b>                                      | –      | <b>SS725</b>                                      | –      | <b>SS723</b>                                      | <b>SS703</b> | <b>SS701</b>                                      |

Note: \*See pages O-7 and O-8 for complete wallplate descriptions.

\*\*Catalog number indicated is Stainless Steel, replace "SS" with the following prefix to designate material: "SA" for Anodized Aluminum, "SB" for Solid Brass.

## Weatherproof Lift Covers for WDL "Closed" and WDL "Open", Wet Locations, 1-Gang

| Description                                  | Group A                                           | Group B                                           | Group C                                           | Group D                                           | 50A<br>Twist-Lock®<br>Receptacles | 30A 4W<br>Hubbellok®<br>Receptacles  |
|----------------------------------------------|---------------------------------------------------|---------------------------------------------------|---------------------------------------------------|---------------------------------------------------|-----------------------------------|--------------------------------------|
|                                              | Boss diameter<br>1.36" to 1.39"<br>(34.5 to 35.3) | Boss diameter<br>1.55" to 1.58"<br>(39.4 to 40.1) | Boss diameter<br>1.68" to 1.72"<br>(42.7 to 43.7) | Boss diameter<br>2.09" to 2.13"<br>(53.1 to 54.1) |                                   |                                      |
| Thermoplastic, with<br>cover "open", gray.   | <b>HBL7423WO</b>                                  | <b>HBL7425WOA</b>                                 | <b>HBL7424WO</b>                                  | –                                                 | <b>HBL7774WO▲</b>                 | –                                    |
| Thermoplastic, with<br>cover "open", yellow. | <b>HBL74CM23WO</b>                                | <b>HBL74CM25WOA</b>                               | <b>HBL74CM24WO</b>                                | –                                                 | <b>HBL77CM74WO▲</b>               | –                                    |
| Cast aluminum, with<br>cover "closed".       | <b>HBL7420</b>                                    | <b>HBL7420</b>                                    | <b>HBL3393</b>                                    | <b>HBL9420</b><br><b>HBL9425•</b>                 | <b>HBL7770</b>                    | <b>HBL20405†</b><br><b>HBL20446†</b> |

Note: •50A 2P 3W.

▲The "CS" versions of 50A Twist-Lock® receptacles will only fit these thermoplastic wallplates.

†HBL20446 wallplate painted red for use with HBL20443 only. HBL20405 wallplate is for use with HBL20403 only. See page B-65 for devices.

## Wallplates

### Nylon plates—virtually unbreakable

- Rounded corners for stylish look
- Reinforced ribs for extra strength
- Screws are factory-inserted for fumble-free installation

### Stainless Steel plates

- Type 302/304
- Non-magnetic
- Ideal for highly corrosive environments

| Description                                                                                                          | Color                                    | Smooth Nylon                                                                  |                                                                                    | Material                 | Smooth Metal Catalog Number  |
|----------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------|------------------------------|
|                                                                                                                      |                                          | Standard                                                                      | Mid-Size                                                                           |                          |                              |
|  1-Gang, 1-Toggle                   | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P1BK</b><br><b>P1</b><br><b>P1GY</b><br><b>P1I</b><br><b>P1W</b>           | <b>PJ1BK</b><br><b>PJ1</b><br><b>PJ1GY</b><br><b>PJ1I</b><br><b>PJ1W</b>           | Brass<br>Stainless Steel | <b>SB1</b><br><b>SS1</b>     |
|  1-Gang, 1-Duplex                   | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P8BK</b><br><b>P8</b><br><b>P8GY</b><br><b>P8I</b><br><b>P8W</b>           | <b>PJ8BK</b><br><b>PJ8</b><br><b>PJ8GY</b><br><b>PJ8I</b><br><b>PJ8W</b>           | Brass<br>Stainless Steel | <b>SB8</b><br><b>SS8</b>     |
|  1-Gang, 1-Decorator                | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P26BK</b><br><b>P26</b><br><b>P26GY</b><br><b>P26I</b><br><b>P26W</b>      | <b>PJ26BK</b><br><b>PJ26</b><br><b>PJ26GY</b><br><b>PJ26I</b><br><b>PJ26W</b>      | Brass<br>Stainless Steel | <b>SB26</b><br><b>SS26</b>   |
|  2-Gang, 2-Toggle                  | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P2BK</b><br><b>P2</b><br><b>P2GY</b><br><b>P2I</b><br><b>P2W</b>           | <b>PJ2BK</b><br><b>PJ2</b><br><b>PJ2GY</b><br><b>PJ2I</b><br><b>PJ2W</b>           | Brass<br>Stainless Steel | <b>SB2</b><br><b>SS2</b>     |
|  2-Gang, 2-Duplex                 | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P82BK</b><br><b>P82</b><br><b>P82GY</b><br><b>P82I</b><br><b>P82W</b>      | <b>PJ82BK</b><br><b>PJ82</b><br><b>PJ82GY</b><br><b>PJ82I</b><br><b>PJ82W</b>      | Brass<br>Stainless Steel | <b>SB82</b><br><b>SS82</b>   |
|  2-Gang, 2-Decorator              | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P262BK</b><br><b>P262</b><br><b>P262GY</b><br><b>P262I</b><br><b>P262W</b> | <b>PJ262BK</b><br><b>PJ262</b><br><b>PJ262GY</b><br><b>PJ262I</b><br><b>PJ262W</b> | Brass<br>Stainless Steel | <b>SB262</b><br><b>SS262</b> |
|  2-Gang, 1-Toggle, 1-Duplex       | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P18BK</b><br><b>P18</b><br><b>P18GY</b><br><b>P18I</b><br><b>P18W</b>      | <b>PJ18BK</b><br><b>PJ18</b><br><b>PJ18GY</b><br><b>PJ18I</b><br><b>PJ18W</b>      | Brass<br>Stainless Steel | <b>SB18</b><br><b>SS18</b>   |
|  2-Gang, 1-Toggle, 1-Decorator    | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P126BK</b><br><b>P126</b><br><b>P126GY</b><br><b>P126I</b><br><b>P126W</b> | <b>PJ126BK</b><br><b>PJ126</b><br><b>PJ126GY</b><br><b>PJ126I</b><br><b>PJ126W</b> | Brass<br>Stainless Steel | <b>SB126</b><br><b>SS126</b> |
|  1-Gang, 1-Single 1.40" Dia. Hole | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P7BK</b><br><b>P7</b><br><b>P7GY</b><br><b>P7I</b><br><b>P7W</b>           | <b>PJ7BK</b><br><b>PJ7</b><br><b>PJ7GY</b><br><b>PJ7I</b><br><b>PJ7W</b>           | Brass<br>Stainless Steel | <b>SB7</b><br><b>SS7</b>     |
|  1-Gang, 1-Blank, Box Mount       | Black<br>Brown<br>Gray<br>Ivory<br>White | <b>P13BK</b><br><b>P13</b><br><b>P13GY</b><br><b>P13I</b><br><b>P13W</b>      | <b>PJ13BK</b><br><b>PJ13</b><br><b>PJ13GY</b><br><b>PJ13I</b><br><b>PJ13W</b>      | Brass<br>Stainless Steel | <b>SB13</b><br><b>SS13</b>   |