


## Terminal Strips & Accessories

IDEAL Terminal and Barrier Strips are designed and manufactured to be rugged, reliable and easy to use. A thermoplastic base and corrosion-resistant screws and hardware provide extended service life. Optional accessories provide convenient, versatile application. Available in a wide variety of circuit configurations, electrical ratings and center-spacing, there is an IDEAL terminal strip for virtually every job.

- Heavy-duty, corrosion-resistant screws, surface plates and optional hardware
- Accessory hardware provides a variety of termination options
- Rugged polyester thermoplastic base (UL Rated 94V-0)
- Operating temperature rated from 130°C (260°F) to -40°C (-40°F)
- UL Recognized (E82048) and CSA Certified (LR15364)

### 89-200 Series Terminal Strips

- .562" (14.28mm) center spacing
- Accepts wire sizes from 10 through 22 AWG Cu
- #8-32 Philslot, zinc-plated steel terminal screws
- Recommended torque: 16 in. - lb.

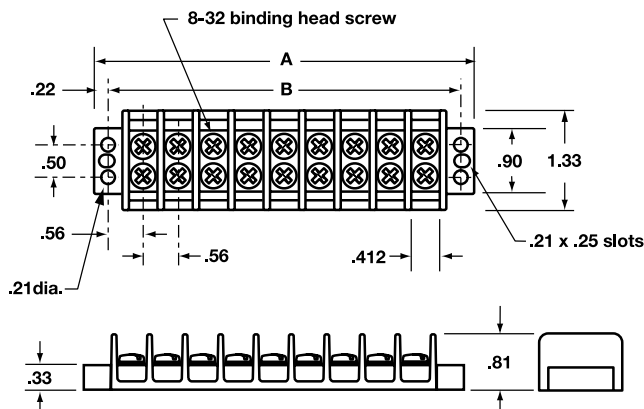


| No. of Poles | Dimensions (Inches) |      | Part No.      |
|--------------|---------------------|------|---------------|
|              | A                   | B    |               |
| 2            | 2.13                | 1.69 | <b>89-202</b> |
| 3            | 2.69                | 2.25 | <b>89-203</b> |
| 4            | 3.25                | 2.81 | <b>89-204</b> |
| 6            | 4.37                | 3.94 | <b>89-206</b> |
| 8            | 5.50                | 5.06 | <b>89-208</b> |
| 10           | 6.62                | 6.19 | <b>89-210</b> |
| 12           | 7.75                | 7.31 | <b>89-212</b> |

Ratings: 30A/600V UL Listed, CSA Certified (30A/250V when used with optional quick connects).

### 89-300 Series Terminal Strips

- .375" (9.52mm) center spacing
- Accepts wire sizes from 14 through 22 AWG Cu
- #6-32 Philslot, zinc-plated steel terminal screws
- Recommended torque: 9 in. - lb.

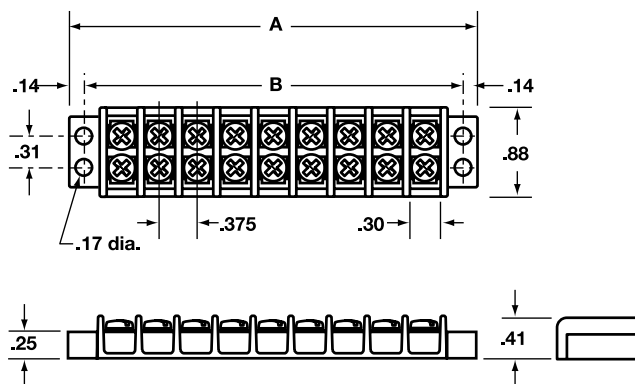

| No. of Poles | Dimensions (Inches) |      | Part No.      |
|--------------|---------------------|------|---------------|
|              | A                   | B    |               |
| 2            | 1.40                | 1.12 | <b>89-302</b> |
| 4            | 2.16                | 1.88 | <b>89-304</b> |
| 6            | 2.90                | 2.62 | <b>89-306</b> |
| 8            | 3.66                | 3.38 | <b>89-308</b> |
| 10           | 4.40                | 4.12 | <b>89-310</b> |
| 12           | 5.16                | 4.88 | <b>89-312</b> |

Ratings: 30A/300V UL Listed, 20A/150V CSA Certified (15A/125V when used with optional quick connects).