

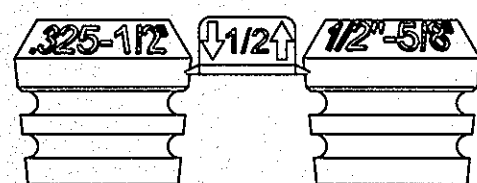
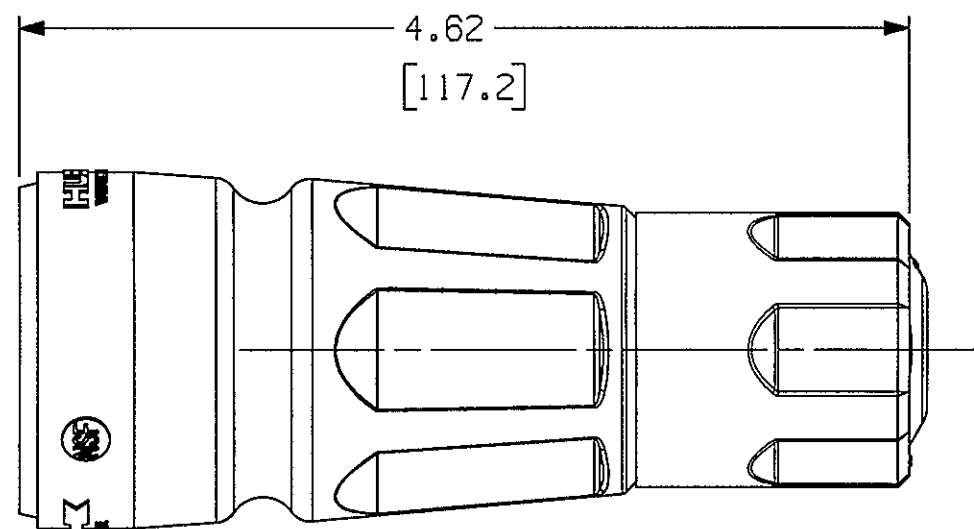



M-12622 2

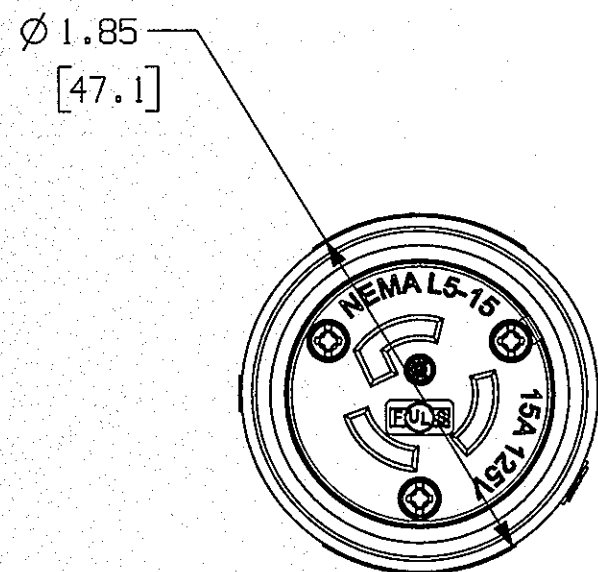


BUSHINGS

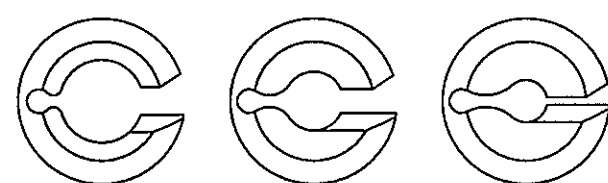

BLUE WHITE BLACK  
GOTCHA RINGS

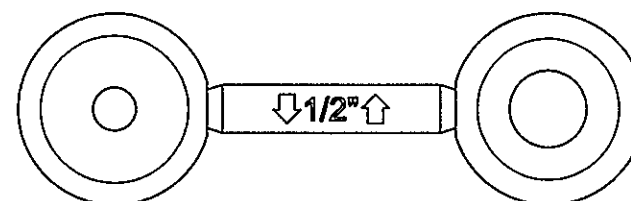

CONE SEALS

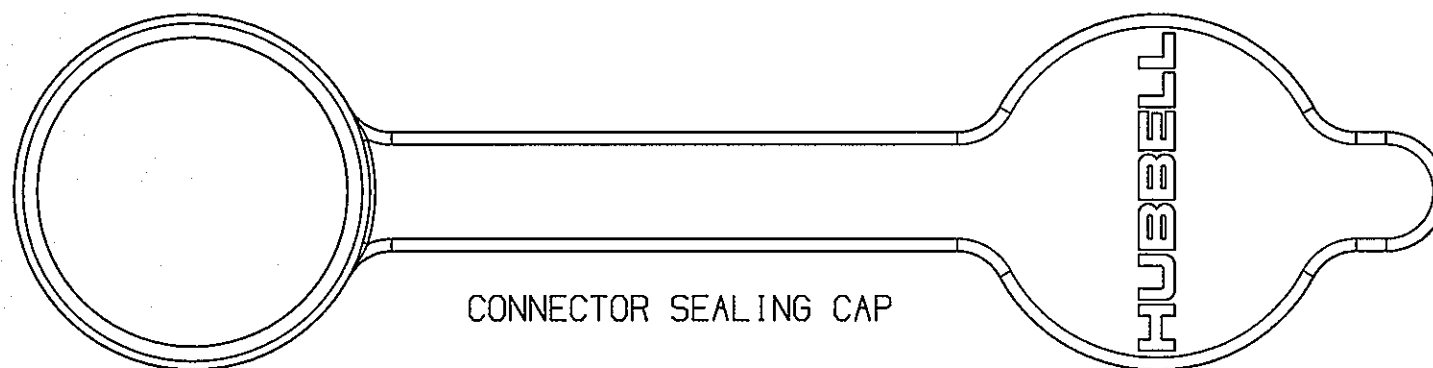

CONNECTOR SEALING CAP

| CATALOG NO. | HBL25W47A          | HBL25W49           | HBL25W34           |
|-------------|--------------------|--------------------|--------------------|
| NEMA CONFIG |                    |                    |                    |
| RATING      | 15A, 125V          | 15A, 250V          | 15A, 277V AC       |
| POLES/WIRES | 2P/3W<br>GROUNDING | 2P/3W<br>GROUNDING | 2P/3W<br>GROUNDING |

- NOTES:
- DIMENSIONS SHOWN ARE TYPICAL. DIMENSION UNITS: INCHES (mm).
  - DEVICES ARE UL LISTED PER UL 498.
  - DEVICES ARE CSA CERTIFIED PER CSA C22.2 NO.42.
  - DEVICES ARE UL VERIFIED WITH THE CONSTRUCTION & PERFORMANCE REQUIREMENTS OF FEDERAL SPECIFICATION W-C-596H.
  - TWO STRAIN RELIEF BUSHINGS ACCOMMODATE ROUND CORD TYPES S & SJ: 16/3 SJ TO 10/3 SJ, 18/3 S TO 12/3 S,  $\varnothing 0.325$  TO  $\varnothing 0.625$ ", (1  $\varnothing 8.3$  TO  $\varnothing 15.9$  mm).
  - CERTAIN DEVICES AVAILABLE IN BLACK.
  - THIS PRODUCT HAS BEEN TESTED TO NEMA ENCLOSURE TYPES 3R, 3RX, 4, 4X, 6, 6P, 12, & IEC CLASSIFICATION IP67 WHEN THE CLOSURE CAP IS CLOSED OR WHEN MATED WITH AN EQUIVALENT RATED WATERTIGHT DEVICE.  
WARNING! RISK OF ELECTRICAL SHOCK. DO NOT SUBMERGE. THE ENCLOSURE RATINGS 6, 6P & IP67 OF THIS PRODUCT ARE ONLY INTENDED TO DEMONSTRATE SUPERIOR RESISTANCE TO WATER INGRESS AND NOT FOR SUBMERSION.

LIST OF PARTS

| DESCRIPTION     | MATERIAL  | FINISH            |
|-----------------|-----------|-------------------|
| CONNECTOR FACE  | NYLON     | WHITE             |
| TERMINAL COVER  | POLYCARB. | CLEAR             |
| CONTACTS        | BRASS     | NICKEL            |
| TERMINAL SCREWS | BRASS     | NONE/NICKEL/GREEN |
| ASSEMBLY SCREWS | SS        |                   |
| SHELL BODY      | TPE       | YELLOW/BLACK      |
| SHELL INSERT    | NYLON     | NATURAL           |
| NUT             | PBT       | GRAY              |
| BUSHINGS        | ELASTOMER | BLACK             |
| GOTCHA RING     | NYLON     |                   |
| CONE SEAL       | ELASTOMER | BLACK             |
| SEALING CAP     | TPE       | YELLOW/BLACK      |

|     |                                                 |     |            |
|-----|-------------------------------------------------|-----|------------|
| 2   | REVISED NOTES & LIST OF PARTS PER DCN 20803 MAM | TLS | 10/27/2014 |
| 1   | INITIAL RELEASE PER DCN 20391 WRV               |     | 06/2014    |
| SYM | REVISIONS                                       | APP | DATE       |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
WATERTIGHT CONNECTOR  
CUSTOMER DRAWING

|                                                                |                                                              |              |
|----------------------------------------------------------------|--------------------------------------------------------------|--------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED                          | WIRING DEVICE-KELLEMS<br>HUBBELL INCORPORATED<br>SHELTON, CT |              |
| .XX = $\pm .01$<br>.XXX = $\pm .005$<br>ANGLES = $\pm 2^\circ$ | DR. BY WRV                                                   | APP. BY TLS  |
|                                                                | TR. BY                                                       | SCALE 1:1    |
|                                                                | CHK. BY TLS                                                  | DATE 06/2014 |