

G FUSE LINK DIN 41660 QUICK-RESPONSE HIGH BREAKING
CAPACITY RATED UNINT. CURRENT 6.3A

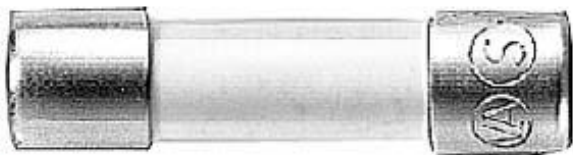


Figure similar

Model	
product brandname	SETRON
Product designation	G fuse link
Design of the product	quick-response (F)
Type of miniature fuse	glass fuse
General technical data	
Size of the fuse link	5x25 mm
Melting characteristics	quick acting (F)
Main circuit	
Operating voltage / rated value	250 V
Operating current / rated value	6.3 A
Display and operation	
Product component / visual fault warning	No

General Product Approval	Declaration of Conformity	Test Certificates	other
	 EG-Konf.	sonstig	Umweltbestätigung

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1822-7EF25>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1822-7EF25/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1822-7EF25

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>