


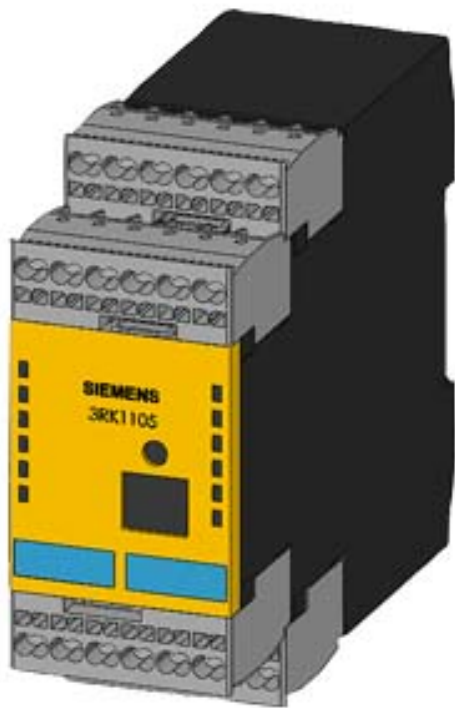

ASIsafe Basis Safety monitor 2 F-RO 2 enabling circuits
IP20, with spring-type terminal removable terminals Safe
output relay Response time maximum 40 ms Monitor
type 2, Version 3 Can be used up to Category 4
(EN954-1) up to PL E (EN ISO 13849-1) up to SIL 3
(IEC 61508)

General technical data		
Design of the product		safety monitor
Protocol is supported AS-Interface protocol		Yes
Type		2 enabling circuits
Number of release circuits		2
Response time max.	ms	40
Type of electrical connection of the inputs and outputs		spring-loaded terminals
Rated operational current Ie		
• AC-12, 50/60 Hz 250 V	A	3
• AC-15, 50/60 Hz		
— 115 V	A	3
— 230 V	A	3
• DC-12 (DC-1) 24 V	A	3
• DC-13 (DC-11)		
— 24 V	A	1
— 115 V	A	0.1
— 230 V	A	0.05

Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		A
Reference code acc. to DIN EN 61346-2		F

Ambient conditions

Ambient temperature		
• during operation	°C	-20 ... +60
• during storage	°C	-30 ... +70
Protection class IP		IP20

Mechanical data

Width	mm	45
Height	mm	108
Depth	mm	120
Mounting type		screws / standard rail

Certificates/ approvals

General Product Approval	EMC	Functional Safety/Safety of Machinery	Declaration of Conformity
 CSA	 UL		 RCM
		Type Examination Certificate	 EG-Konf.

Declaration of Conformity	Shipping Approval
Miscellaneous	 ABS
	 BUREAU VERITAS
	 LRS
	 PRS
	 RINA

Shipping Approval	other
 RMRS	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1105-1BG04-0CA0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1105-1BG04-0CA0>

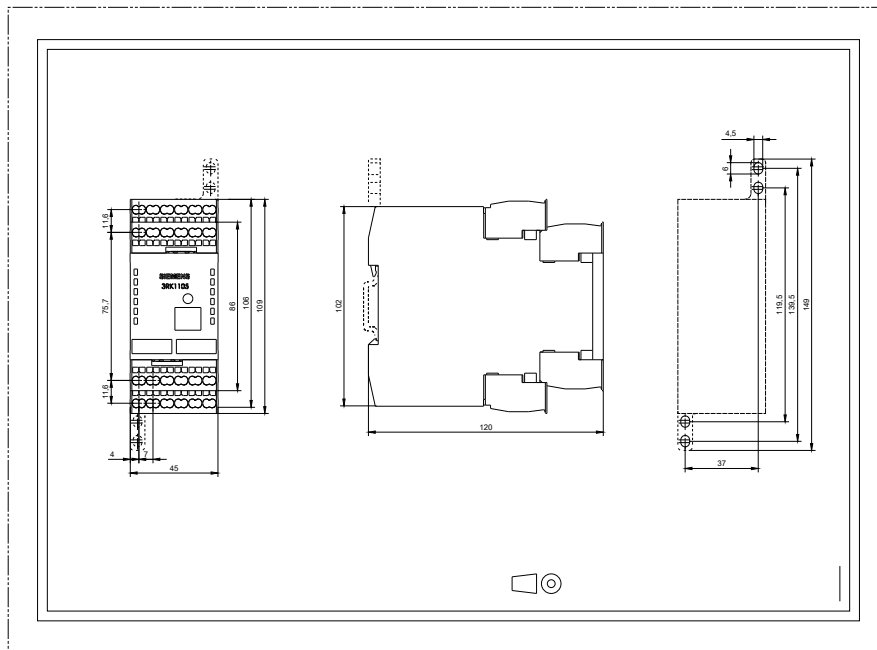

last modified:

03/10/2020