

Spare part as of 01.01.2015 the product is blocked for delivery and can no longer be ordered as a new part. For information on the successor See FAQ Entry ID: 82203106. For further questions, the familiar contact partners are available. "SIPLUS HMI MP 177 6"" for" media exposure with conformal coating based on 6AV6642-0EA01-3AX0

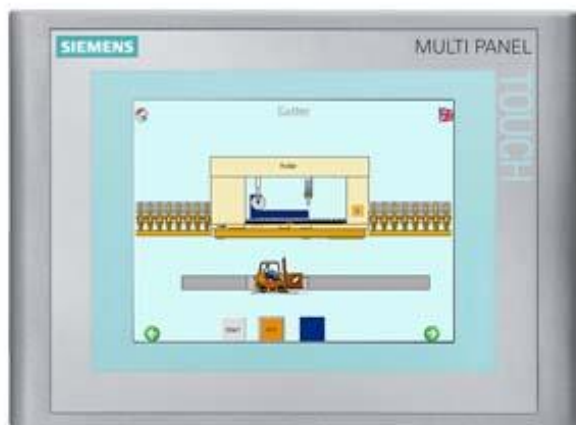


Figure similar

General information	
Product type designation	MP177
Customer-specific configuration	Yes
Display	
Design of display	TFT
Screen diagonal	5.7 in
Color display	Yes
Number of colors	65 536
Resolution (pixels)	
• Horizontal image resolution	320 Pixel
• Vertical image resolution	240 Pixel
Backlighting	
• MTBF backlighting (at 25 °C)	50 000 h
Control elements	
Control elements	Touch screen
Keyboard fonts	

• Numeric keyboard	Yes; Onscreen keyboard
• alphanumeric keyboard	Yes; Onscreen keyboard
• hexadecimal keyboard	Yes; Onscreen keyboard
Touch operation	
• Design as touch screen	Yes; analog, resistive
Connection type	
• Type of connection for mouse/keyboard/barcode reader	USB / USB / USB
Installation type/mounting	
Mounting position	vertical
Supply voltage	
Type of supply voltage	DC
Processor	
Processor type	RISC 32 bit, 520 MHz
Memory	
Type of memory	Flash / RAM
Memory available for user data	2 Mbyte
Capacity of main memory, max.	128 Mbyte
Time of day	
Clock	
• Type	Hardware clock, battery backup, synchronizable
• retentive	Yes
• synchronizable	Yes
Interfaces	
Interfaces/bus type	1x RS 422, 1x RS 485, 1x Ethernet (RJ45) (max. 12 Mbit/s)
Number of industrial Ethernet interfaces	1
Number of RS 485 interfaces	1; together with RS 422
Number of RS 422 interfaces	1; together with RS 485
Number of USB interfaces	1
Multimedia card/SD card slot	combined
Protocols	
PROFIBUS	Yes
MPI	Yes
Protocols (Ethernet)	
• TCP/IP	Yes
Protocols (terminal link)	
• Sm@rtServer	Yes
EMC	
Emission of radio interference acc. to EN 55 011	

- Limit class A, for use in industrial areas

Yes; EN 61000-6-4, interference emission: Intended for use in industrial areas.

Degree and class of protection

IP (at the front)	IP65
IP (rear)	IP20

Standards, approvals, certificates

Certifications	CE
cULus	No
Suitable for safety functions	No

Use in hazardous areas

• ATEX Zone 2	No
• ATEX Zone 22	No
• FM Class I Division 2	No

Marine approval

• Germanischer Lloyd (GL)	No
• American Bureau of Shipping (ABS)	No
• Bureau Veritas (BV)	No
• Det Norske Veritas (DNV)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (Class NK)	No
• Polski Rejestr Statkow (PRS)	No

Ambient conditions

Ambient temperature during operation	
• min.	0 °C
• max.	50 °C

Ambient temperature during storage/transportation	
• min.	-20 °C
• max.	60 °C

Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

Relative humidity	
• Operation, max.	100 %; RH incl. condensation/frost permitted (no commissioning in bedewed state)

Resistance	
Use in stationary industrial systems	
— to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
— to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 incl. salt spray. The supplied connector covers must remain on the unused interfaces during operation!

— to mechanically active substances
according to EN 60721-3-3

Yes; Class 3S4 incl. sand, dust. The supplied connector covers
must remain on the unused interfaces during operation!

Operating systems

pre-installed operating system	Windows CE (Version 5)
--------------------------------	------------------------

Configuration

Message indicator	Yes
Alarm system (incl. buffer and acknowledgment)	Yes
Process value display (output)	Yes
Process value default (input) possible	Yes
Recipe management	Yes

Configuration software

- Configuration tool
- WinCC flexible Compact Version 2008 SP1 or higher (to be ordered separately)

Languages

Online languages	
• Number of online/runtime languages	5
Project languages	
• Languages per project	32

Functionality under WinCC (TIA Portal)

Libraries	Yes
Task planner	Yes
Help system	Yes
• Number of characters per info text	70

Message system

- Number of alarm classes
- Number of messages
- Bit messages
 - Number of bit messages
- Analog messages
 - Number of analog messages
- Telegram message procedure Alarm S
- System messages HMI
- System messages PLC
- System messages, other (SIMATIC S7, Sinumerik, Simotion, etc.)
- Lines
- Number of characters per message
- Number of process values per message
- Acknowledgment groups
 - Number of acknowledgement groups
- Message indicator

• First/last value	Yes
Recipe management	
• Number of recipes	100
• Data records per recipe	200
• Entries per data record	200
• Recipe memory	32 KB integrated Flash, expandable
Variables	
• Number of variables per device	1 000
• Number of variables per screen	50
• Number of variables	1 000
• Type Date & Time	1 000
• Limit values	Yes
• Multiplexing	Yes
• Structures	No
Images	
• Number of configurable images	500
• Permanent window/default	Yes
• Start screen configurable	Yes
• Image selection by PLC	Yes
• Image number in the PLC	Yes
Image objects	
• Text objects	2,500 text elements
• Number of I/O fields per image	50
• Number of date/time fields	30
• Return	Yes
• Graphics object	Bit maps, icons, vector graphics
— Icons	500
Complex image objects	
• Status/control	With SIMATIC S7
• dynamic objects	Diagrams, bar graphs, sliders, analog display, invisible buttons
— Number of objects per project	500
— Number of curve diagrams per image	5
• Methods	Trend / profile
• Bar graphs	
— Number of bars per chart	5
• Sliders	
— Number of slides per image	5
• Pointer instruments	
— Number of analog indicators per image	5
• Limit value lines	Yes
• Number of alphanumerical fields	1 000

— alphanumeric fields per image	50
• Number of numerical fields	1 000
— numerical fields per image	50
• Number of password fields	1 000
• Number of visible switches per project	1 000
— visible switches per image	100
— hidden switches per image	100
• Number of status switches per project	1 000
— Number of status switches per image	100
• Number of selector switches per project	200
— Selector switches per image	100
• Number of signal lamps per project	1 000
— Signal lamps per image	100
Attributes for dynamic objects	
• Color change	Yes
• X/Y movement	Yes
• Hide	Yes
• Angle of rotation	No
Lists	
• Number of text lists per project	300
• Number of text lists per image	10
• Number of entries per text list	30
• Number of graphics lists per project	100
• Number of graphic lists per image	10
• Number of entries per graphics list	30
Security	
• Number of user groups	50
• Number of user rights	32
• Password export/import	Yes
Logging through printer	
• Recording/Printing	Alarms, report (shift report), color print, hardcopy
Transfer (upload/download)	
• Transfer of configuration	MPI/PROFIBUS DP, serial, USB, Ethernet, automatic transfer recognition
Process coupling	
• Connection to controller	S5, S7-200, S7-300/400, TI 505, Win AC, SINUMERIK, SIMOTION, Allen Bradley (DF1), Allen Bradley (DF485), Mitsubishi (FX), OMRON (LINK/Multilink), Modicon (Modbus), further non-Siemens drivers, see chapter "System interfaces"
• S7-200	Yes
— PPI (point-to-point)	Yes
— PPI network	Yes

— MPI	Yes
— PROFIBUS DP	Yes
— Ethernet	Yes
• S7-300/400	Yes
— MPI	Yes
— PROFIBUS DP	Yes
— PROFINET	Yes
• S5	Yes
— PROFIBUS DP	Yes
• TI 505	Yes
• Allen Bradley (DF1)	Yes
• Allen Bradley (DF485)	Yes
• Mitsubishi (FX)	Yes
• Mitsubishi (MP4)	Yes
• Telemecanique (Uni-Telway)	Yes
• OMRON (LINK/Multilink)	Yes
• Modicon (Modbus)	Yes
• GE-Fanuc (SNP)	Yes
Functions	
• TAB sequence	Yes
• Calculating functions	Yes
• Animate	Yes
Service tools/configuration aids	
• Clean screen	Yes
• Touch calibration	Yes
• Backup/Restore manually	Yes
• Simulation	Yes
• Device switchover	Yes
Peripherals/Options	
Peripherals	Printer, barcode reader
• SIMATIC HMI MM memory card: Multi Media Card	Yes
• SIMATIC HMI SD memory card: Secure Digital memory card	Yes; WP gate is not supported.
• USB memory	Yes
Additional software components loadable	Yes
Dimensions	
Width of the housing front	212 mm
Height of housing front	156 mm
Overall depth	45 mm
Weights	

Weight (without packaging)	0.85 kg; max.
Other	
free hotline	Yes
last modified:	08/14/2019 