

Continuous light element, with integrated LED, blue, 115 V AC,  
Diameter 50 mm





| General technical data                               |                          |
|------------------------------------------------------|--------------------------|
| Product brand name                                   | SIRIUS                   |
| Product designation                                  | Continuous light element |
| Design of the optical signal                         | continuous light         |
| Type of voltage of the operating voltage             | AC                       |
| Operating voltage                                    |                          |
| • 1 at AC at 50 Hz rated value                       | 115 V                    |
| • 1 at AC at 60 Hz rated value                       | 115 V                    |
| Relative positive tolerance of the operating voltage | 10 %                     |
| Relative negative tolerance of the operating voltage | -10 %                    |
| Consumed current maximum                             | 25 mA                    |
| Service life of LED                                  | 100 000 h                |
| Material                                             | PC                       |
| Color                                                | blue                     |
| Mounting type                                        | Bayonet                  |
| Reference code                                       |                          |
| • acc. to DIN EN 61346-2                             | P                        |
| • acc. to DIN EN 81346-2                             | P                        |

| Mechanical data                             |                  |
|---------------------------------------------|------------------|
| Outer diameter of the signal column element | 50 mm            |
| Lamp                                        |                  |
| Product component Light source              | Yes              |
| Type of light source                        | LED              |
| Light intensity                             | 0.07 cd          |
| Light intensity                             | 0.05 ... 0.11 cd |
| Ambient conditions                          |                  |
| Ambient temperature during operation        | -20 ... +50 °C   |
| Protection class IP                         | IP54             |
| Height                                      | 67 mm            |
| Width                                       | 52 mm            |
| Certificates/ approvals                     |                  |

| General Product Approval                                                                | EMC                                                                               | Declaration of Conformity                                                                | other                                                                                         |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <br>UL |  | <br>RCM | <br>EG-Konf. |
|                                                                                         |                                                                                   | <a href="#">Miscellaneous</a>                                                            | <a href="#">Confirmation</a>                                                                  |

| Further information                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Information- and Downloadcenter (Catalogs, Brochures,...)</b><br><a href="http://www.siemens.com/sirius/catalogs">www.siemens.com/sirius/catalogs</a>                                                                                                                                                  |
| <b>Industry Mall (Online ordering system)</b><br><a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4240-5AF">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4240-5AF</a>                                                                                |
| <b>Cax online generator</b><br><a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=8WD4240-5AF">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=8WD4240-5AF</a>                                                                      |
| <b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b><br><a href="https://support.industry.siemens.com/cs/ww/en/ps/8WD4240-5AF">https://support.industry.siemens.com/cs/ww/en/ps/8WD4240-5AF</a>                                                                                  |
| <b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)</b><br><a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4240-5AF&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4240-5AF&amp;lang=en</a> |

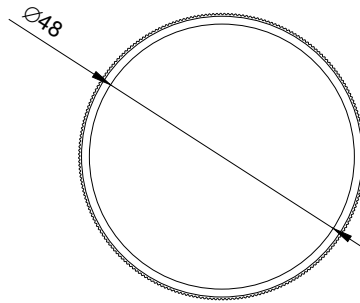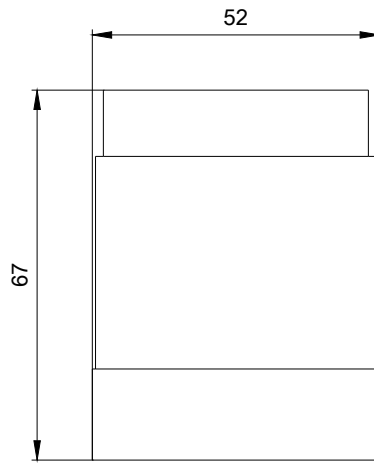

last modified:



W9.4444; 8WD42...\_ALL  
W6.8611; 8WD42...\_ALL  
03/06/2020