
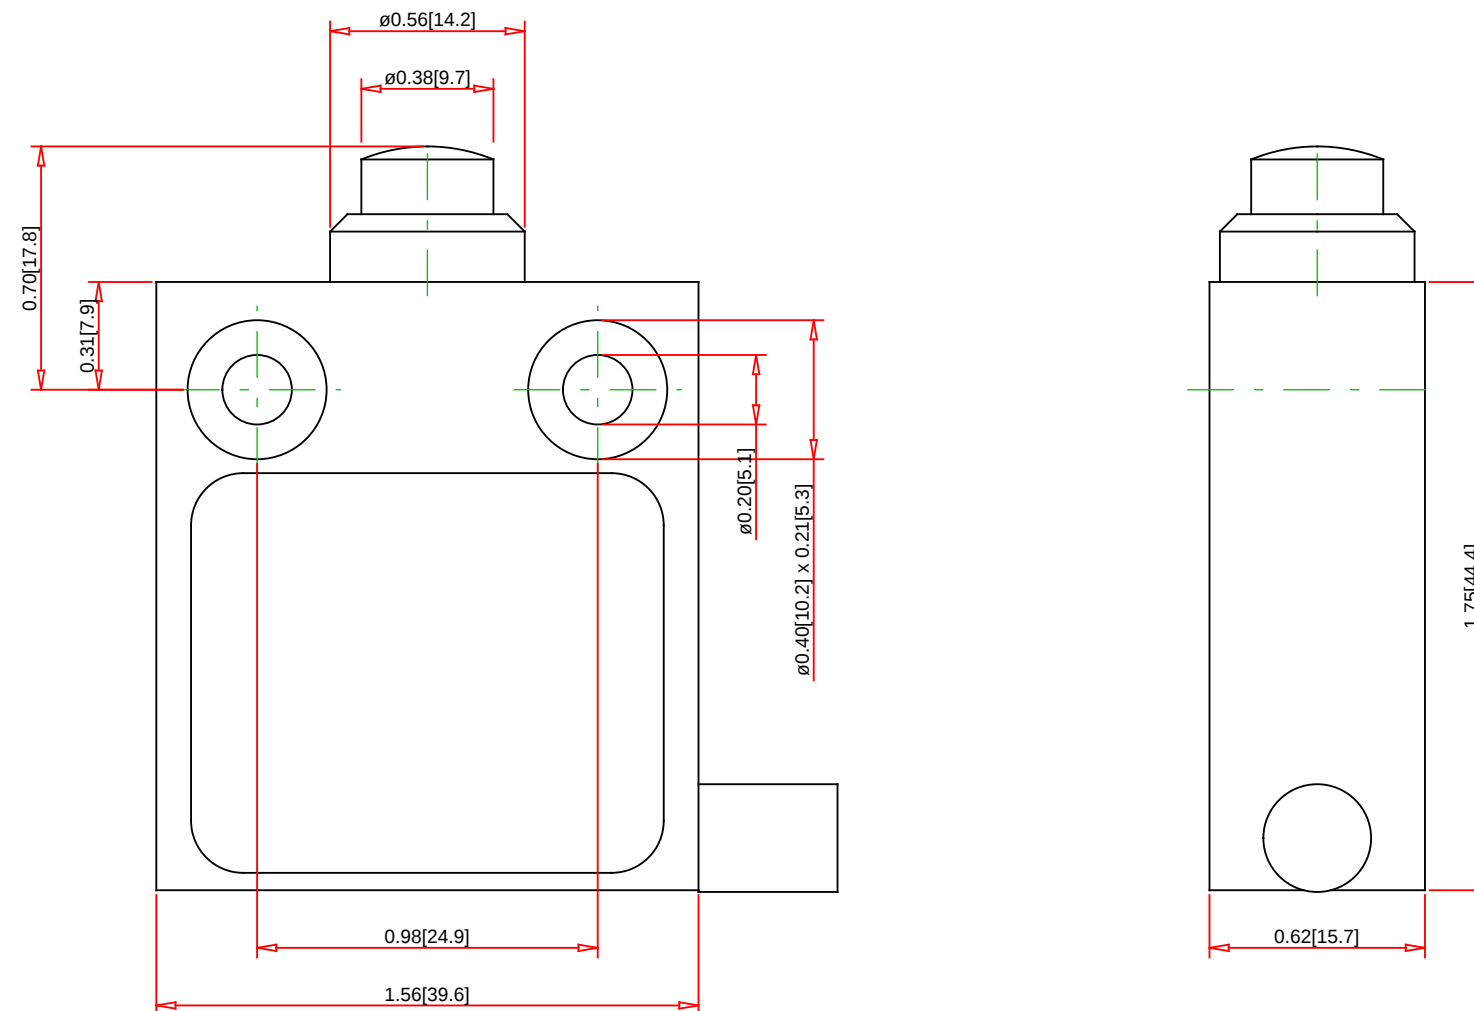




Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]	Part No.: 9007MS01S0406	 Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com
--	---------------------------------------	--

Technical Information:		Specification:	
Terminal Type: Enclosure Rating: Approvals: Weight: Conforming to Standards: RoHS: Operating Temperature Range: Shock Resistance: Vibration Resistance: Max. Actuation Speed : Repeat Accuracy: Operating Torque/Force: Cable Length:	NEMA 1/2/4/6/6P/12/13; IP67 UL # E42259 CCN NKCR - CSA # LR25490 Class 3211-03 - CE 1.18 lb NEMA and UL type 6P No -20 to +220° F (-28.9 to +104° C) 35G 10G (75 to 1200Hz) 80 Ounces 12 ft	Description: Body Style/Type Description: Head Type: Lever Arms: Body with Contact Type: Conduit Thread: Ampere Rating Continuous: Maximum Voltage Rating: Actuation: Actuator Action: Lever Arm Length: Roller Dimension: Roller Material: Contact Configuration: Contact Operation: Connection Type: Head Material: Positive Opening:	9007M, silver contacts, top push plunger, 12' side cable NEMA Square D Limit Switches 9007MS/ML Miniature Potted 39 mm Metal Body Metal top push plunger Lever Arm (ordered separately) 1 N.O. / 1 N.C. SPDT Snap Action Form C - Silver 12 ft 10A/5A 240VAC/28VDC Vertical Momentary 1 N.O./1 N.C. Snap Action Side Entry #18 AWG SJTO Cable - Yellow Stainless steel/brass No