


Installation Instructions

FOR FFPT6 FLUSH COVER SERIES

Catalog Numbers: FFPT6-CVR-ALM, FFPT6-CVR-BLK, FFPT6-CVR-BRS

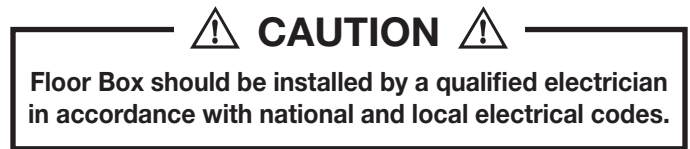

IMPORTANT: Read all instructions before installing poke-through or cover.

NOTE: This cover is used with a FFPT6 Series Poke-Through.

INSTALLATION MATERIALS REQUIRED:



- UTILITY KNIFE, to cut carpet.
- RTV SILICONE, to seal cover to floor and block water entry.
- FLAT HEAD SCREWDRIVER, to be used on mounting screws.

TABLE OF CONTENTS:


- 1.0 Installation
- 2.0 Cut Out Template for Floor.

1.0 INSTALLATION

- 1.1 Remove PT6-AC Abandonment / Temporary Cover (if present) by unscrewing the (4) #6-32 x 1" long screws, exposing the top rim of the poke-through.
- 1.2 Install floor covering and trim hole around poke-through to 7-1/4" diameter. Use template provided with this instruction (See Figure 1).
- 1.3 Apply sealant to floor:
 - 1.3.1 **Concrete and Carpet:** Apply moderate amount of RTV silicone sealant directly to concrete floor fully around top rim of poke-through. Use enough sealant to block water entry (see Figure 1).
 - 1.3.2 **Tile, Wood and Linoleum:** Apply moderate amount of RTV silicone sealant directly to finished floor. Fully surround 7-1/4" opening in floor. Use enough sealant to block water entry (see Figure 1).
- 1.4 Install new FFPT6-CVR-XXX cover using the (4) #6-32 x 1" long screws, furnished with cover (See Figure 1).
- 1.5 Push down on top to fully seat cover to floor. Clean excess sealant around cover edge. (See Figure 2).
- 1.6 Use thread sealer on all plugs to block water entry.

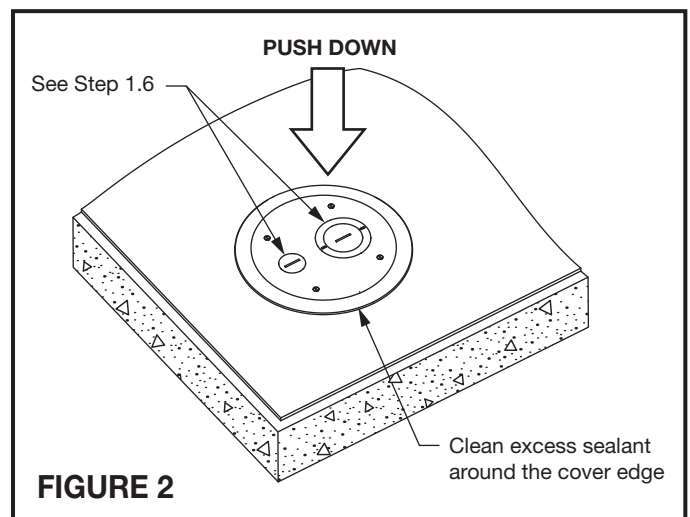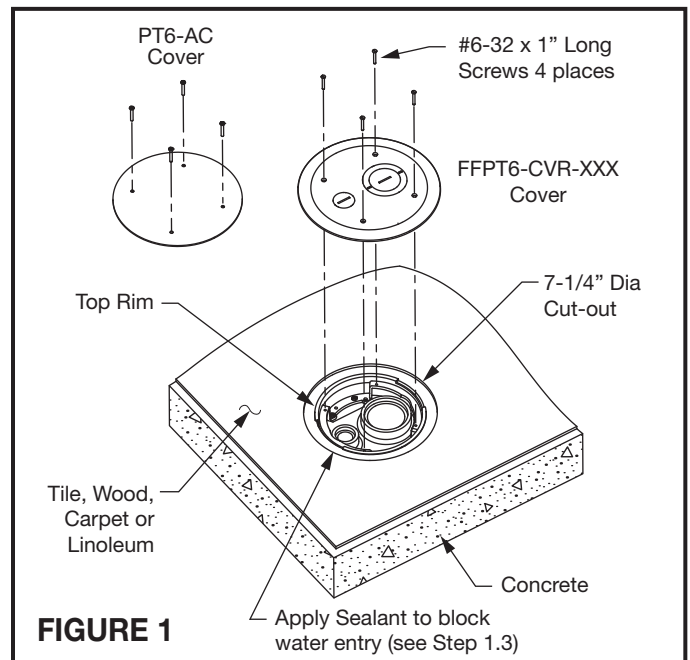

2.0 CUTOUT TEMPLATE FOR FLOOR

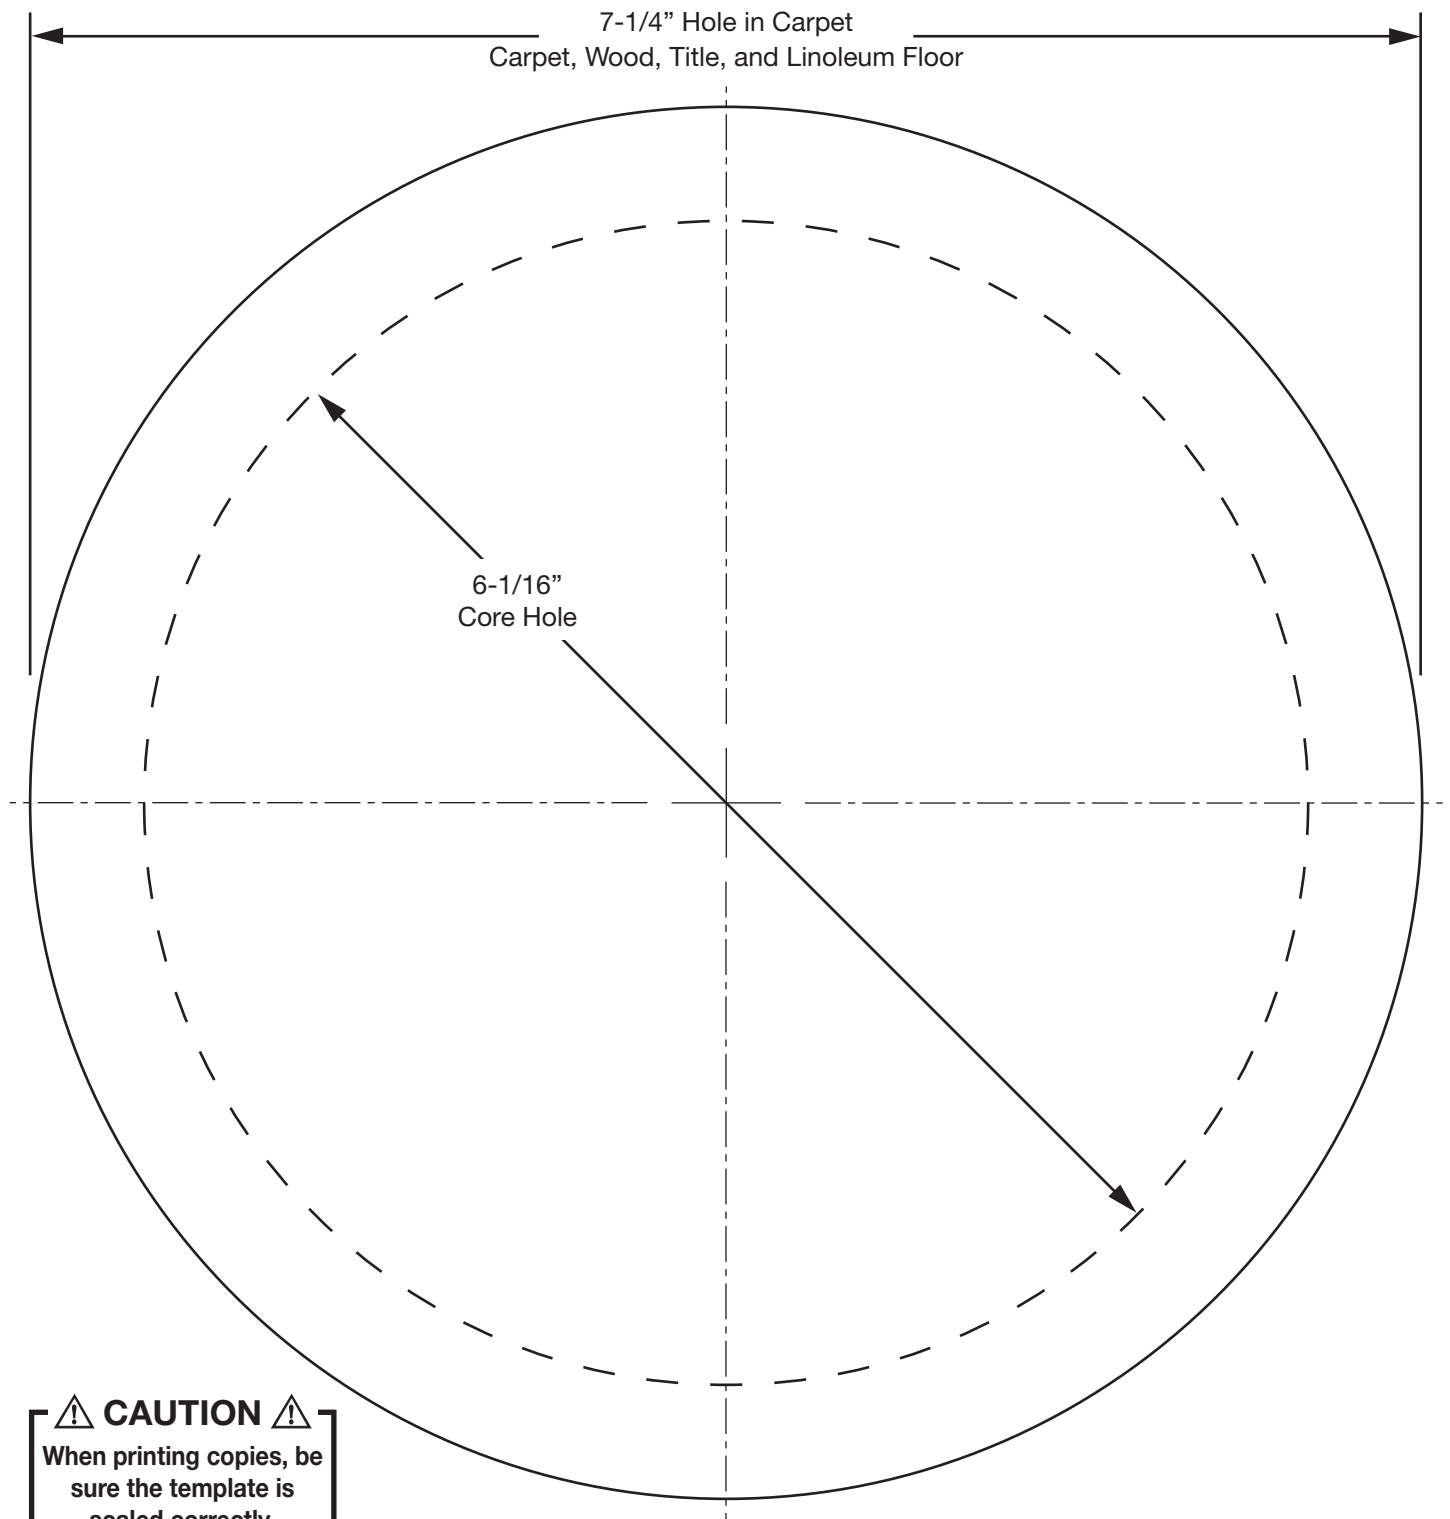

⚠ CAUTION ⚠

When printing copies, be sure the template is scaled correctly.

WARRANTY: Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials or workmanship for a period of two (2) years following the date of purchase. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product. Misuse, misapplication or modification of Thomas & Betts Products immediately voids all warranties.

Limitations and Exclusions: THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com