


M-13299

1

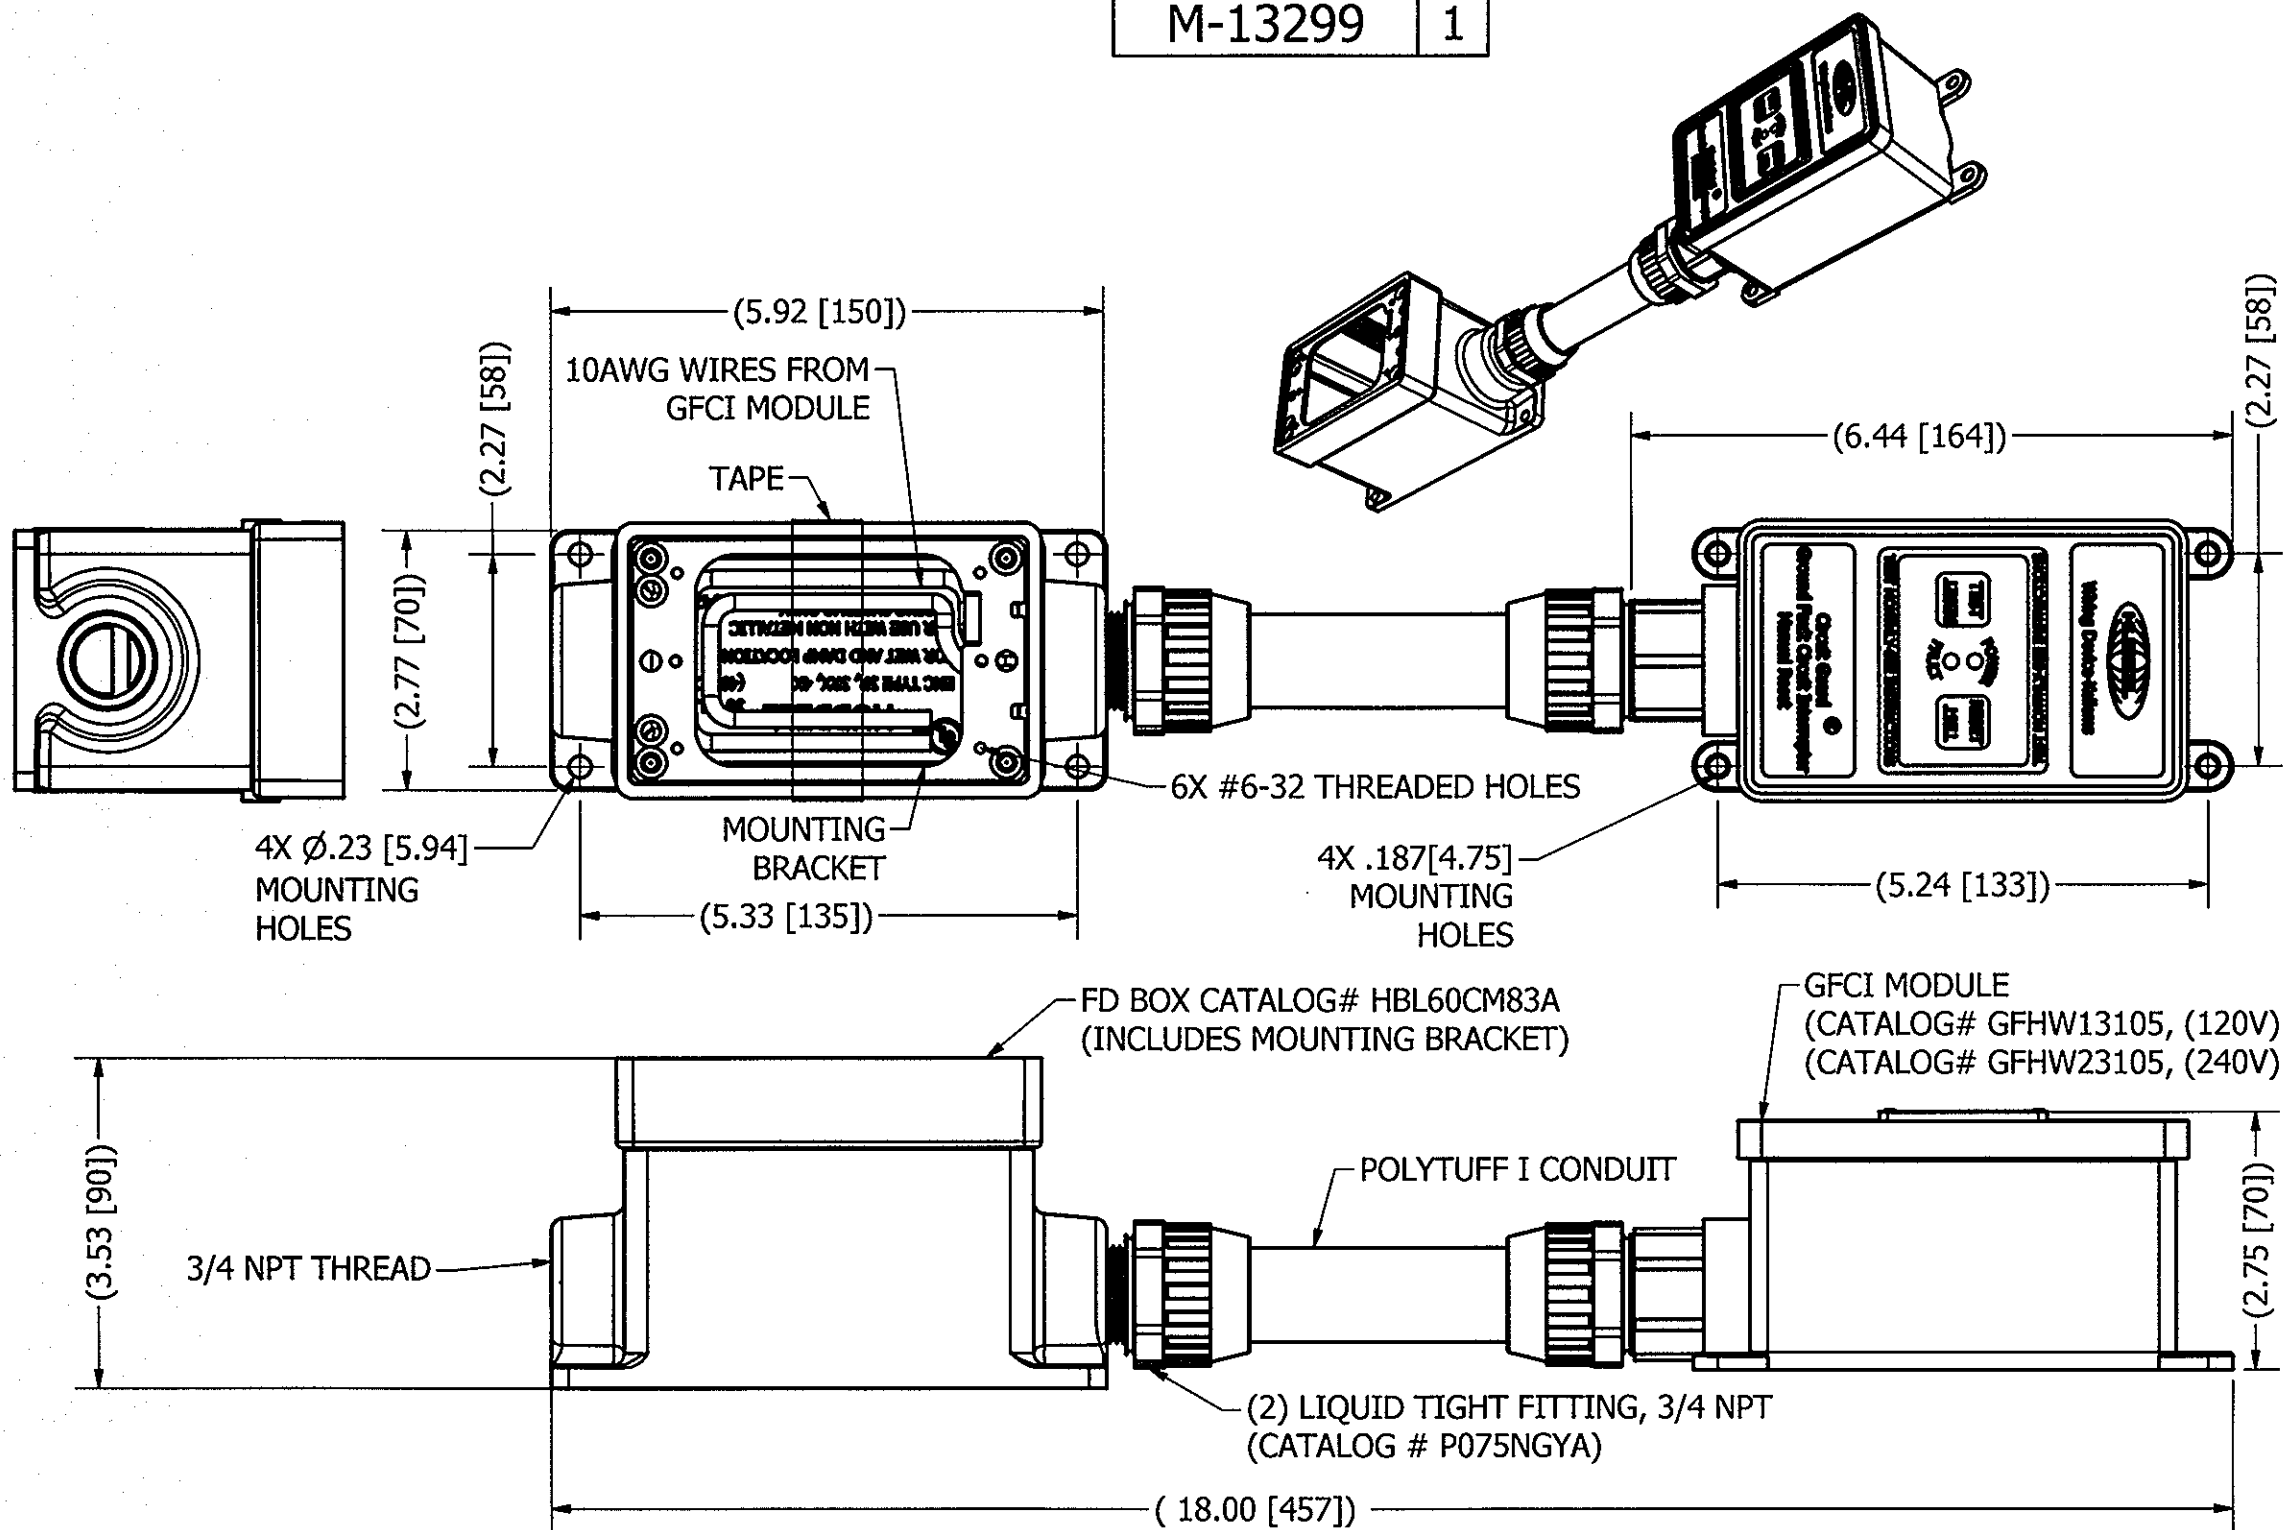

NOTES:
1-UL ENC TYPE 4X.
2-FOR WET AND DAMP LOCATIONS.
3-FOR USE WITH NON METALLIC WIRING SYSTEMS ONLY.
4-DIMENSIONS ARE IN INCHES [mm]

CAT #	DESCRIPTION
HBLWTGF120	GFCI PROTECTED FD BOX, 120V
HBLWTGF240	GFCI PROTECTED FD BOX, 240V

CAGE CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FD BOX	PLASTIC	YELLOW
GFCI	PLASTIC	GRAY
FITTING	PLASTIC	GRAY
CONDUIT	PLASTIC	GRAY
BOX BRACKET	SST	PASSIVATED
BRACKET SCREWS	SST	PASSIVATED

1	RELEASED PER DCN# 21939 MJZ	PJB	03/28/16
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
GFCI PROTECTED FD BOX, 30A, AUTO RESET, 3/4 NPT

		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.01 .XXX = ±.005 ANGLE TOL. ±2°	DR. BY MZ	SCALE 1/2	
	CHK. BY PJB	DATE 03/23/16	

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

B

M-13299

1