

Straight Blade Devices

15A, 125V, 2 Pole, 3 Wire Grounding

SNAPConnect<sup>®</sup> Hospital Grade USB Charger Receptacle



Features

- Fast Charge USB Ports
- Combination Ports, One Type A, One Type C
- High Power 3 Amp, up to 9 Volt USB Output
- USB Ports Rated 10,000 Cycles
- Hospital Grade Receptacle

Ordering Information

| Description                           | Device Color | UPC Number   | Catalog Number |
|---------------------------------------|--------------|--------------|----------------|
| Hospital Grade 15A 125V Duplex, Black | Black        | 883778308543 | SNAP8200UACBK  |
| 5 Amp USB Ports                       |              |              |                |

Listings

cULus Listed to UL498, UL1310

Specifications

|                 |                                                          |
|-----------------|----------------------------------------------------------|
| Face            | Reinforced Thermoplastic                                 |
| Base            | Reinforced Thermoplastic                                 |
| Indicator       | Green LED                                                |
| Terminals       | SNAPConnect                                              |
| Mounting Strap  | Galvanized Steel                                         |
| Electrical      | Certified for current interrupting at full rated current |
| Mounting Screws | Stainless Steel                                          |
| USB Port        | Stainless Steel                                          |

Performance


|                      |                                                                                                             |
|----------------------|-------------------------------------------------------------------------------------------------------------|
| Electrical           |                                                                                                             |
| Current Interrupting | Certified for current interrupting at full rated current                                                    |
| Dielectric Voltage   | Withstands 1,500V minimum<br>Complies with USB BC1.2 Battery Charging and 3.0 Power Delivery Specifications |

Mechanical

|                         |                                                              |
|-------------------------|--------------------------------------------------------------|
| Product Identification  | Ratings are a permanent part of the device                   |
| Terminal Accommodation  | #14-#10 AWG copper stranded or solid conductor only          |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA       |
| USB Ports               | Stainless steel rated for 10,000 plug incertions and removal |

Environmental

|                       |                                                     |
|-----------------------|-----------------------------------------------------|
| Flammability          | UL 94V-2                                            |
| Operating Temperature | Maximum continuous 75°C, minimum -40°C (w/o impact) |

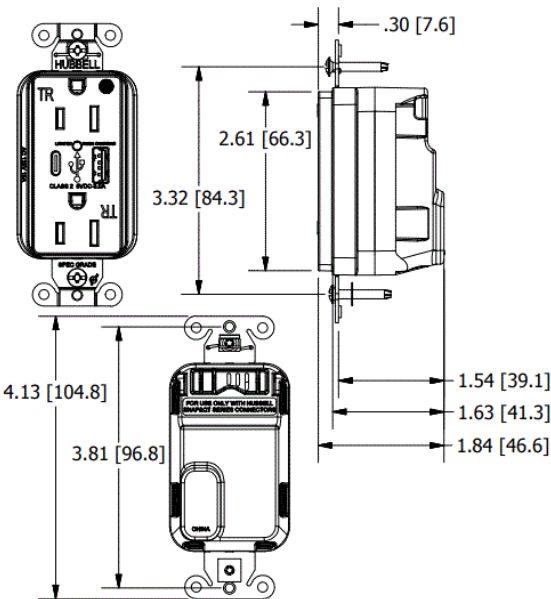

Online Resources

Customer Sales Drawing  
eCatalog  
Installation Instructions

