

AS-Interface 4-fold M12 feeder U_ASI and Uaux, 4 x M12 socket IP67 Delivery incl. mounting plate



General technical data		
Type of device		AS-Interface accessories
Design of the product		AS-i M12 4-fold feeder, AS-i with Uaux, 4x M12 socket
Function		AS-i flat cable transition to M12
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Number sockets		4
Scope of supply		Delivery including mounting plate
Connections/ Terminals		
Connection system		insulation piercing method for AS-Interface flat cable
AS interface		
• Connection		4 × M12 socket
Inputs		
Inputs socket assignment		1 = AS-i "+" 2 = Uaux "-" 3=AS-i "-" 4 = Uaux "+"
Mechanical data		
Type of mounting		for wall and standard rail mounting
Contacts Load rating max	A	4

Ambient conditions		
Ambient temperature	°C	-25 ... +85
Ambient temperature during storage	°C	-25 ... +85
degree of protection		IP67

Certificates/ approvals

General Product Approval			EMC	Declaration of Conformity	Miscellaneous
					
CSA	UL		RCM	EG-Konf.	

Shipping Approval			other
			Confirmation
ABS	PRS	RMRS	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-1NR04>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1NR04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1NR04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-1NR04&lang=en

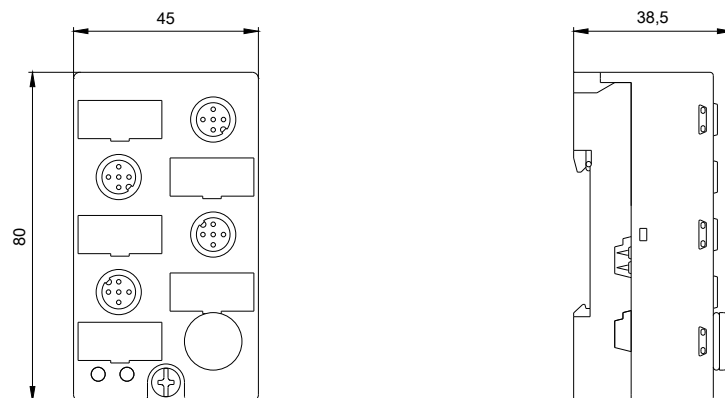

last modified:

10/24/2019