

AS-Interface function module LOGO! standard slave
IP20 4 DI/4 DQ Can be used for device series 0BA6 and 0BA7



General technical data		
Design of the product		AS-Interface connection for LOGO!
Type		4 inputs (virtual) / 4 outputs (virtual)
Design of the slave type		standard slave
Supply voltage DC	V	24
Status display display of AS-Interface/diagnostics		green/red dual LED
Inputs		
Number of digital inputs		4
Outputs		
Number of digital outputs		4
Ambient conditions		
Ambient temperature during operation	°C	0 ... 55
Protection class IP		IP20
Mechanical data		
Width	mm	36
Height	mm	90
Depth	mm	58

Mounting type

on standard rail

Certificates/ approvals

General Product Approval



CSA



UL



RCM



EG-Konf.

[Miscellaneous](#)

Test Certificates

[Special Test Certificate](#)



ABS



LRS



PRS



RINA



RMRS

Shipping Approval

other

[Confirmation](#)

[Miscellaneous](#)



ASi

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1400-0CE10-0AA2>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1400-0CE10-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-0CE10-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1400-0CE10-0AA2&lang=en

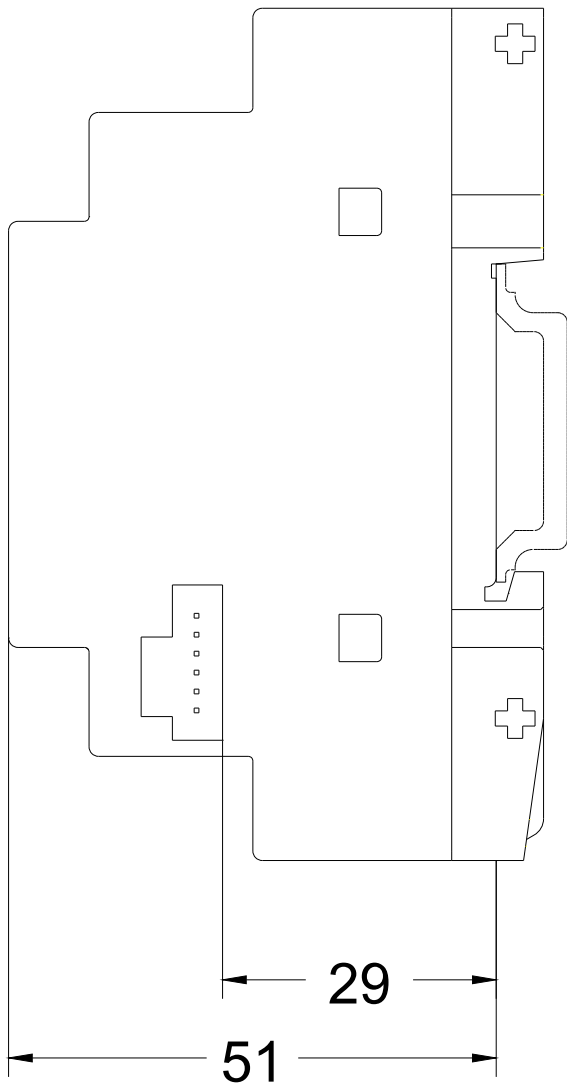

last modified:

03/08/2020

