



Description

IC Rated Step Light/Night Light housing for incandescent lamp • For use indoors in insulated and non-insulated areas

Listings

UL Listed, C-UL/CSA certified for through-branch wiring and damp locations • Conforms with City of Chicago IP requirements



Features

- Medium base porcelain socket with nickel-plated copper screw shell
- Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction • Patented breakaway bars for tight joist spacing • Oversized set screw lock fixture in position
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (3) 1/2" pryout knockouts and ground wire
- UL Listed, C-UL/CSA certified for No. 12 AWG daisy chain circuit connectors suitable for 90°C permitted in junction box
- Thermally protected against improper use of lamps
- Secure trim retention with torsion springs
- Trim selection and A19 wattages shown below

Ordering Information

Catalog No.	Description
ICTC113	Incandescent step light/night light housing

Dimensions

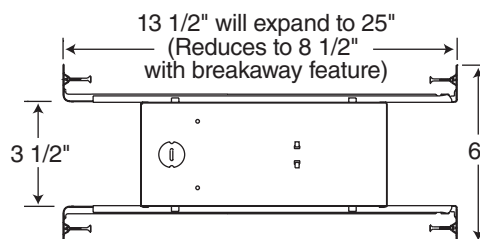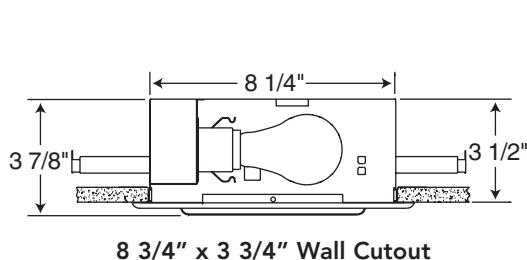

Trims




Diffuse Lensed Trim

Catalog #
104-WH

Description
Diffuse Glass Lens, White Trim

Max. Lamp Rating
TC: 40W A19
IC: 25W A19
Trim Size:
9 9/16" L x 4 7/8" H



Louver Trim

Catalog #
840-WH

Description
Angled Louvers, White Trim

Max. Lamp Rating
TC: 40W A19
IC: 25W A19
Trim Size
9 9/16" L x 4 7/8" H

