



Night Lights/Step Lights | IC113LED

LED Indoor Step/Night Light & Trims IC Rated



Description

LED step light is rated for use in indoor wall mount or ceiling mount applications • Recessed housing is IC rated and can be completely covered with insulation • Designed to provide 50,000 hours of life and is compatible with standard trims

Listings

UL and cUL Listed for damp locations • Union made
• RoHS compliant



Features

- LED step light ships complete with LED light engine and driver
- Environmentally friendly, energy efficient
 - No harmful ultraviolet or infrared wavelengths
 - No lead or mercury
- Consumes 6W nominal
- Non-dimming driver accommodates input voltage of 120 volts AC at 50/60HZ
- LED PCB mounted to removable tray for easy access to LED driver and junction box
- Utilizes high output LEDs binned to ENERGY STAR® standards
- 3000K and 4100K color temperatures available
- Rated 50,000 hours at 70% lumen maintenance
- Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction
 - Breakaway bars for tight joist spacing • Oversized set screw locks fixture into position
- Integral junction box with (3) 1/2" pryout knockouts and ground wire • UL and cUL Listed for No. 12 AWG daisy chain circuit connectors suitable for 90° C permitted in wiring compartment
- Secure trim retention with torsion springs
- Trim selection shown below

Ordering Information

Catalog No.	Description
IC113LED-3K	3000K LED color temperature
IC113LED-41K	4100K LED color temperature

Dimensions

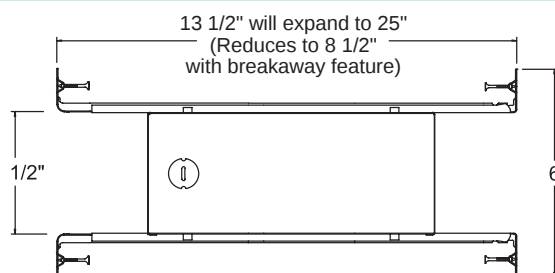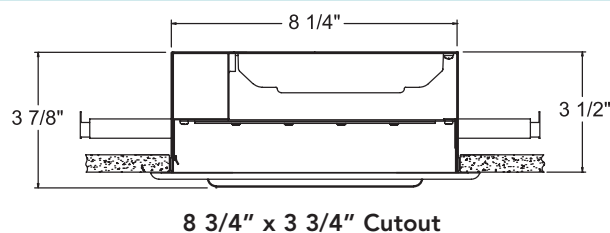

Trims




Diffuse Lensed Trim

Catalog #
104-WH

Description
Diffuse Glass Lens, White Trim

Trim Size:
9 9/16" L x 4 7/8" H




Louver Trim

Catalog #
840-WH

Description
Angled Louvers, White Trim

Trim Size
9 9/16" L x 4 7/8" H





Description

IC Rated Step Light/Night Light housing for compact fluorescent lamp • For use indoors in insulated and non-insulated areas

Listings

UL and cUL Listed for through-branch wiring and damp locations • Conforms with City of Chicago IP requirements



Features

- Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction
 - Breakaway bars for tight joist spacing
 - Bar hangers may be repositioned 90°
 - Quick-Loc slot and oversized set screw lock fixture in position
- Pre-wired junction box with (3) 1/2" pryout knockouts and ground wire
- UL Listed, cUL/CSA certified for through-branch wiring, maximum (4) #12 AWG branch circuit conductors (2 in, 2 out)
- 120V NPF magnetic ballast
- Secure trim retention with torsion springs
- One 7W or 9W twin tube CFL lamp mounted horizontally in fixture
- Trim selection shown below

Ordering Information

Catalog No.	Description
ICPL813	CFL step light/night light housing

Dimensions

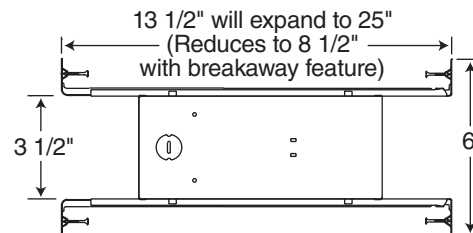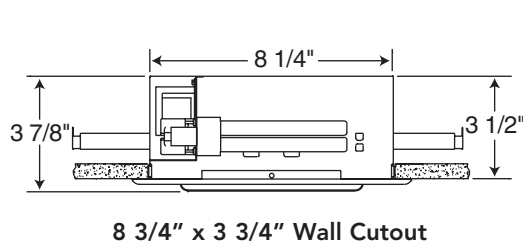

Trims

Diffuse Lensed Trim	Catalog # 104-WH	Description Diffuse Glass Lens, White Trim	Max. Lamp Rating 7W/9W CFL Trim Size: 9 9/16" L x 4 7/8" H	
	Catalog # 840-WH	Description Angled Louvers, White Trim	Max. Lamp Rating 7W/9W 2-pin CFL Trim Size: 9 9/16" L x 4 7/8" H	



Description

IC Rated Step Light/Night Light housing for incandescent lamp • For use indoors in insulated and non-insulated areas

Listings

UL and cUL Listed for through-branch wiring and damp locations • Conforms with City of Chicago IP requirements


Features

- Medium base porcelain socket with nickel-plated copper screw shell
- Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction
 - Breakaway bars for tight joist spacing
 - Oversized set screw lock fixture in position
- Housing is fully assembled for ease of installation
- Pre-wired junction box with (3) 1/2" pryout knockouts and ground wire
- UL Listed, cUL/CSA certified for No. 12 AWG daisy chain circuit connectors suitable for 90°C permitted in wiring compartment
- Thermally protected against improper use of lamps
- Secure trim retention with torsion springs
- Trim selection and A19 wattages shown below

Ordering Information

Catalog No.	Description
ICTC113	Incandescent step light/night light housing

Dimensions

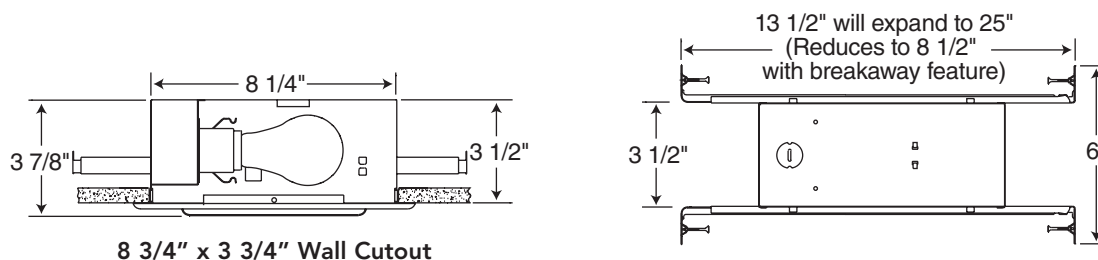

Trims




Diffuse Lensed Trim

Catalog #
104-WH

Description
Diffuse Glass Lens, White Trim

Max. Lamp Rating

TC: 40W A19
IC: 25W A19
Trim Size:
9 9/16" L x 4 7/8" H



Louver Trim

Catalog #
840-WH

Description
Angled Louvers, White Trim

Max. Lamp Rating

TC: 40W A19
IC: 25W A19
Trim Size
9 9/16" L x 4 7/8" H

