



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" ECONOMY IC REMODEL HOUSING

GU24 COMPACT FLUORESCENT LAMPS

IC22RGU24

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing rated for use with GU24 base compact fluorescent lamps • Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • Use supplied adjustment slot cover or Air-Loc Gasket (see accessories), to stop infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **AIR-LOC** do not require gasket.

PRODUCT SPECIFICATIONS

Lamp GU24 base compact fluorescent lamp ratings based on trim selected—see reverse.

Socket GU24 base plastic • Socket attached to fixed bracket mounted to top of housing for consistent, straight lamp positioning.

Trims Trim selection shown on reverse.

Labels • U.L. listed for through-branch wiring, damp locations and IP • Union made • UL and cUL Listed • Trims 20, 21, 22, 242, 2330 and 6101 are wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Product specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL and cUL listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1¾" ceiling thickness.

DIMENSIONS

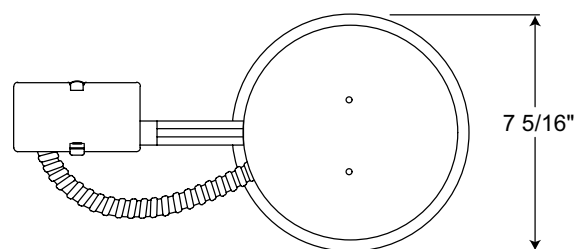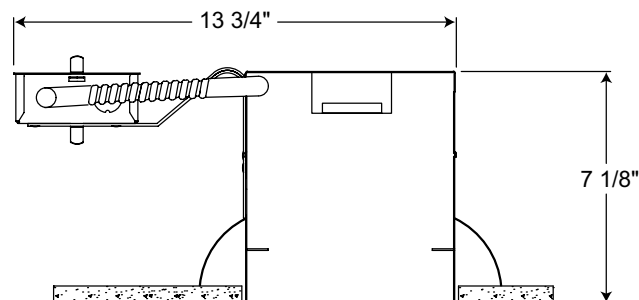

6 3/4" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
ALG6	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES

Series	Input Voltage	Lamp Rating	Lamp Included
IC22RGU24 6" Economy IC Remodel Housing	120V	26W	Lamp not Included

6" ECONOMY IC REMODEL HOUSING

GU24 COMPACT FLUORESCENT LAMPS

IC22RGU24

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	24 BABZ	6" Downlight Tapered Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring	15W R30
	24 BBL	6" Downlight Tapered Baffle Trim - Black Baffle, Black Trim Ring	
	24 BSC	6" Downlight Tapered Baffle Trim - Black Baffle, Satin Chrome Trim Ring	
	24 BWH	6" Downlight Tapered Baffle Trim - Black Baffle, White Trim Ring	
	24 WWH	6" Downlight Tapered Baffle Trim - White Baffle, White Trim Ring	
	254 BWH	6" Downlight Deep Baffle Trim - Black Baffle, White Trim Ring	26W Spiral, 15W R30
	254 WWH	6" Downlight Deep Baffle Trim - White Baffle, White Trim Ring	
	9324 SC	6" Decorative Luminous Disc Frosted Trim - Satin Chrome	15W R30
	9702	6" Decorative Luminous Collar Frosted Trim - Luminous Collar (Frosted)	15W R30
	9024 WWH	6" Decorative Octagonal Trim - White, White Trim Ring	15W R30
	9524 SC	6" Decorative Metal Band Trim - Satin Chrome	15W R30
	V3027 CWH	6" Clear Cone Trim® - Clear Alzak, White Trim Ring	15W R30
	V3024 BWH	6" Conical Baffle Trim - Black, White Trim Ring	15W R30
	V3024 WWH	6" Conical Baffle Trim - White, White Trim Ring	
	V3025 BWH	6" Straight Baffle Trim - Black, White Trim Ring	15W R30
	V3025 WWH	6" Straight Baffle Trim - White, White Trim Ring	
	V3035T WWH	6" Straight Baffle Trim with Torsion Springs - White, White Trim Ring	26W Spiral, 15W R30

Trim Size: 7 5/8" O.D. (except Cat. Nos. 20, 21, 22, 9024 - 8" O.D., Cat. No. 9702 - 7 3/4" O.D.).

Note: In Canada when insulation is present, Type IC fixtures must be used.

Alzak® is a registered trademark of Alcoa Corp.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.