


Conduit, cable and pipe supports

Angler® pipe and conduit clamp

For EMT, IMC, Rigid and Standard Pipe.

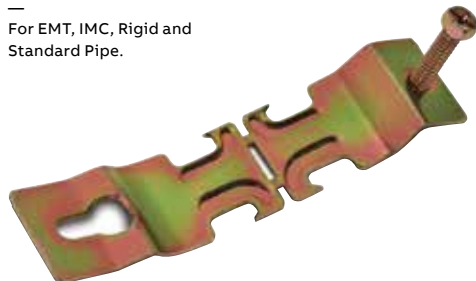

Universal Series



Cat. No.	Size (in)	Strap thickness (ga)	Design load (lbs)	Install torque (lbs/in)	Std. Ctn.
Galv-Krom® finish					
C 109 1/2	½	14	400	40	100
C 109 3/4	¾	14	500	40	100
C 109 1	1	14	500	40	100
C 109 1 1/4	1¼	14	500	40	100
C 109 1 1/2	1½	12	800	60	50
C 109 2	2	12	800	60	50
C 109 2 1/2	2½	12	800	60	50
C 109 3	3	12	800	60	50
C 109 3 1/2	3½	11	1,200	60	25
C 109 4	4	11	1,200	60	25
SilverGalv® finish					
C 109 1/2 EG	½	14	400	40	100
C 109 3/4 EG	¾	14	500	40	100
C 109 1 EG	1	14	500	40	100
C 109 1 1/4 EG	1¼	14	500	40	100
C 109 1 1/2 EG	1½	12	800	60	50
C 109 2 EG	2	12	800	60	50
C 109 2 1/2 EG	2½	12	800	60	50
C 109 3 EG	3	12	800	60	50
C 109 3 1/2 EG	3½	11	1,200	60	25
C 109 4 EG	4	11	1,200	60	25



Rigid Series

Cat. No.	Size (in)	Strap thickness (ga)	Design load (lbs)	Install torque (lbs/in)	Std. Ctn.
Galv-Krom® finish					
C 109R 1/2	½	14	600	40	100
C 109R 3/4	¾	14	600	40	100
C 109R 1	1	14	600	40	100
C 109R 1 1/4	1¼	14	600	40	100
C 109R 1 1/2	1½	12	800	60	50
C 109R 2	2	12	800	60	50
C 109 2 1/2	2½	12	800	60	50
C 109 3	3	12	800	60	50
C 109 3 1/2	3½	11	1,200	60	25
C 109 4	4	11	1,200	60	25
SilverGalv® finish					
C 109R 1/2 EG	½	14	600	40	100
C 109R 3/4 EG	¾	14	600	40	100
C 109R 1 EG	1	14	600	40	100
C 109R 1 1/4 EG	1¼	14	600	40	100
C 109R 1 1/2 EG	1½	12	800	60	50
C 109R 2 EG	2	12	800	60	50
C 109 2 1/2 EG	2½	12	800	60	50
C 109 3 EG	3	12	800	60	50
C 109 3 1/2 EG	3½	11	1,200	60	25
C 109 4 EG	4	11	1,200	60	25


Hex head size ¾" for ½" to 1¼" sizes, ½" for 1½" to 4" sizes.

Material: Stamped Steel.

Pipe sizes 2½" to 4" utilize the same clamps for the Rigid Series and the Universal Series.

Available in SilverGalv® Finish by adding "EG" suffix to catalog number.

C-200 Universal pipe straps



Cat. No.	EMT, IMC, rigid pipe size (in)	Pipe O.D. range (in)	Strap thickness (ga)	Weight (lbs/C)
C-200-1/2	½	.706–.804	14	12
C-200-3/4	¾	.922–1.060	14	13
C-200-1	1	1.163–1.315	14	14
C-200-1-1/4	1¼	1.508–1.660	14	16
C-200-1-1/2	1½	1.738–1.900	12	27
C-200-2	2	2.196–2.375	12	31

Design load equal to C-105 straps.