



Shown actual size: Ariadni dimmer and 1-gang Fassada wallplate in White (WH).

Product family features

- Matches existing switches
- Toggle-style switch turns light on to level set by slider
- Slide adjusts light to your favorite level
- **eco-dim®** model available
- 1000W preset dimmers have voltage compensation which maintains stable light levels, despite line voltage variations
- 100% factory tested
- Coordinating Fassada® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

Control types

- Single-pole (one location)
- 3-way or 4-way (two or more locations)

Direct load type compatibility

- Incandescent/halogen lighting
- Magnetic low-voltage lighting
- Fluorescent lighting
- LED lighting
- Ceiling fans
- Ceiling fan/lights

Load type requiring load interface

- Electronic low-voltage lighting
- Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.

For additional information, see pg. 174.

Available finishes

Use **BOLD** color code in model number (Example: AY-600P-**BL**)

Gloss finishes*



WH
White



LA
Light Almond



AL
Almond



IV
Ivory



BR
Brown



BL
Black



SS
Stainless Steel

*Coordinating wallplates only available separately. For wallplate information, see pg. 166.

Stainless Steel wallplate includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.

Dimmers

Dimmers



- Toggle turns on/off
- Slide up to brighten; down to dim
- **eco-dim®** model guarantees at least 15% energy savings compared to a standard switch

Dimmers with locator light



- Toggle turns lights on/off
- Slide up to brighten; down to dim
- Includes amber locator light
- Not available in black

Fan and fan/light controls

Fan controls



- Toggle turns fan on/off
- Slide up to increase speed; down to decrease
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum

Fan/light controls



Fan control (left)


- Slide up to on/increase fan speed; down to decrease fan speed/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum

Dimmer (right)

- Toggle turns light on/off
- Slide up to brighten; down to dim



Connections overview

Load connections*

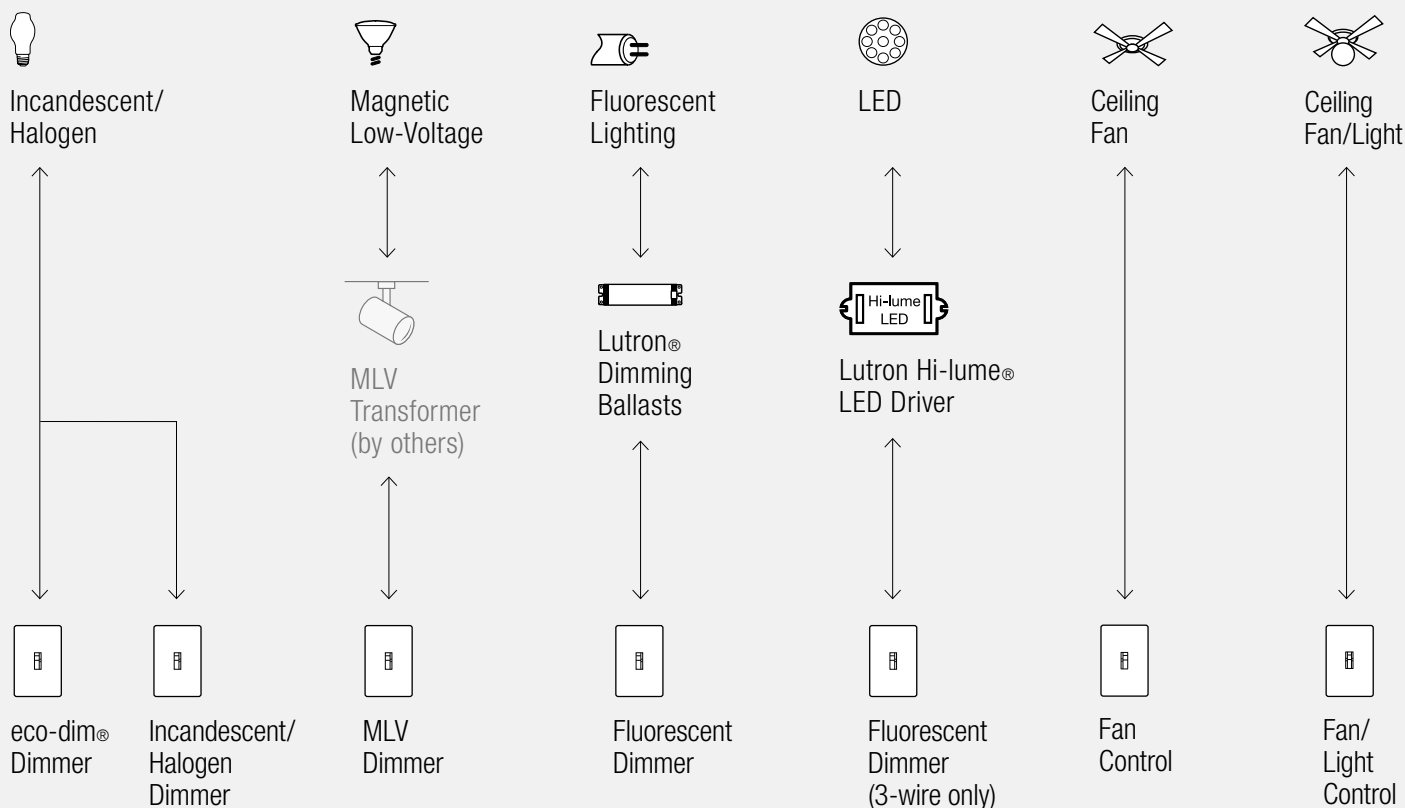

Control types (for 2 or more locations)

Dim from one location, switch from the others

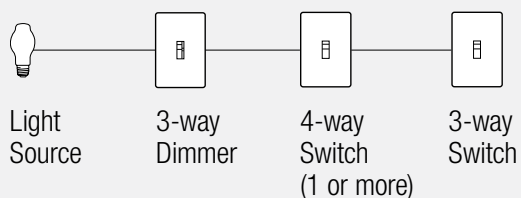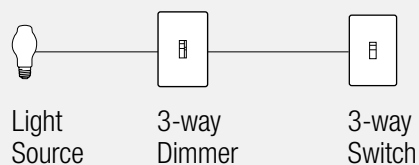

For more information on ballasts, visit www.lutron.com/ballasts.

For more information on LED drivers, visit www.lutron.com/LED.

***For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

Dimmer model numbers

 Incandescent/halogen dimmers

Preset dimmers

Single-pole 120V 600W	AY-600P- CC ³
Single-pole 120V 1000W	AY-10P- CC ³
3-way 120V 600W	AY-603P- CC ³
3-way 120V 1000W	AY-103P- CC ³

Preset dimmers with locator light

Single-pole 120V 600W	AY-600PNL- CC ³
Single-pole 120V 1000W	AY-10PNL- CC ³
3-way 120V 600W	AY-603PNL- CC ³
3-way 120V 1000W	AY-103PNL- CC ³

eco-dim® preset dimmer

3-way/single-pole 120V 600W	AY-603PG- EE ²
--------------------------------	----------------------------------

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

 Magnetic low-voltage dimmers

Preset dimmers

Single-pole 120V 600VA (450W)	AYLV-600P- CC ³
3-way 120V 600VA (450W)	AYLV-603P- CC ³

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

CC³: Gloss color codes, see pg. 125

EE²: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)
(Wallplates not included, order separately, see pg. 168)

Dimmer, fan and fan/light control
model numbers 3-wire fluorescent dimmers*

Preset dimmers

3-way/single-pole 120V 8A	AYF-103P- CC ³
3-way/single-pole 277V 6A	AYF-103P-277- CC ³

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

Also compatible with Hi-lume® LED driver.

No derating required if ganged.

Adjustable low-end trim.

 Hi-lume® LED drivers:
3-wire fluorescent dimmers*

Preset dimmers

3-way/single-pole 120V 8A	AYF-103P- CC ³
3-way/single-pole 277V 6A	AYF-103P-277- CC ³

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers, visit www.lutron.com/HilumeLED.

No derating required if ganged.

Adjustable low-end trim.

 Fan control

Fan control—quiet 3-speed

3-way/single-pole 120V 1.5A	AYFSQ-F- CC ³
--------------------------------	---------------------------------

 Fan/light control

Fan control and dimmer—quiet 3-speed

Single-pole fan control 120V 1.5A (left)	AY2-LFSQ- CC ³
Single-pole dimmer 120V 300W incandescent/halogen (right)	


All models must be derated if ganged unless otherwise noted, see pg. 170.

For more information on ballasts, visit www.lutron.com/ballasts.

*Requires neutral wire connection.

Ceana® Controls pg. 120


Preset Dimmers
with Locator Light



Incandescent/
Halogen


AY-600PNL-
AY-10PNL-
AY-603PNL-
AY-103PNL-

Preset Fan
Control




Quiet 3-Speed
AYFSQ-F-

Preset Fan/
Light Control




Quiet
3-Speed
and
Incandescent/
Halogen
Dimmer
AY2-LFSQ-

Preset Dimmers



Incandescent/
Halogen

CN-600P-
CN-10P-
CN-603P-
CN-103P-



Magnetic
Low-Voltage

CNLV-600P-
CNLV-603P-

The following are registered trademarks of Lutron Electronics Co., Inc.:

Lutron; Abella; Ariadni; Attache; Aurora; Aviena; Ceana; Centurion; Chronos; Claro; Credenza; Dalia; Dimming by Lutron; Diva, Earn & Learn; eco-dim; eco-minder; EcoSystem; ECO-10; Faedra; Fandial; Fassada; Glyder; Grafik Eye; Grafik 6000; Green Glance; Leaf (stylized design); Greenovation; Hi-lume; HomeWorks; Light Greener, Light Better; Lumea (word mark & stylized); Lutron Dimmers Save Energy (& design); Lyneo; Maestro; Maestro IR; Maestro Wireless; Meadowlark; microWATT (stylized); Milenya; Nova, Nova T☆; Orion; Osprey; Personna; Pico (shades and lighting controls); Qoto; Quantum; RadioRA; Radiotouch; Ranax; Rania; RTISS Equipped; RTISS Equipped (& design); Satin Colors; Save Energy & Design; See As You Save; seeTouch; Sheershade; Sivoia; Sivoia QED; Skylark; Softswitch; Softswitch128; Solaris; Spacer; Spacer System; Stanza; T☆; The Sunburst logo, The Ultimate Home Theater Experience; Toggler, Tu-Wire; Vareo; Versaplex; Vierti; Viseo; and U.S. Trademarks 1,617,349; 1,624,489; 1,624,490; 1,626,714; 1,638,913, 1,061,804, 3,585,368, 3,597,211 and 3,601,010.

The following are trademarks of Lutron Electronics Co., Inc.:

Achitrave; Athena; The Avant Collection: Balance LC; CERUS; Classico; Clear Connect; C•L; Digital Micronet; Digital MicroWATT; Dim-N-Glo; Diva Duo; Earn & Learn Express; Energi Savr Node; FASS; Favorite Scene; Grafik 5000; Grafik 7000; Grafik Eye Designer; Grafik Eye Liaison; Grafik Integrale; Grafik RA; Grafik Systems hand; Harmony; Hi-lume Compact SE; Hi-Power 2•4•6; HomeServe; HomeWorks Interactive; Kirbé; LCP128; LuMaster; Lumea2 (stylized); Lustra; Lutron Controls Your Light; Maestro Duo; micros; microPS; Millennium; Piedra; Omnislide; One Spec; Pre-Pack; Radio Powr Savr; Roller 20; Roller 64; Roller 100; Roller 225; Sav Energy I Beautifully; seeTemp; Serena; Signature Series; Simplicity. Convenience. Control.; Skylark Contour; SmartDimmer; SOLos; Spec Editor; Stanza; Sunata; Symphony; TapSwitch; Telume; Versaplex QS; Vibrato; Zone Capture and 2Link.

Product approvals:



The products in this catalog are UL listed as required; most are CSA certified; many are NOM certified. Not all products carry all certifications.