

2310



Color:  Black

UPC Code: 07847780110

NEMA:
L5-20R



2310

Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

20 Amp, 125 Volt, NEMA L5-20R, 2P, 3W, Flush Mtg Locking Receptacle, Industrial Grade, Grounding, V-0-MAX - BLACK

Technical Information

AC Horsepower Ratings

Horsepower Rating: 1 HP

Electrical Specifications

Dielectric Voltage: Withstands 2000V per UL498

Grounding: Grounding

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125 Volt

Amperage: 20 Amp

Current Limiting: Full Rated Current

Wire: 3

Pole: 2

Environmental Specifications

Operating Temperature: -40C to 60C

Flammability: Rated V-0 per UL94

Material Specifications

Strap Material: Nickel-Plated Brass

Face Material: Ultramid

Body Material: Nylon

Ground Clips: Nickel-Plated Brass

Terminal Screws: Chromated Brass

Ground Contacts: Brass

Color: Black

Cover Material: Valox 357

Line Contacts: Brass

Grounding Screw: Chromated Brass

Terminal Clamps: Zinc-Plated Brass

Base Material: Valox

Mechanical Specifications

Product ID: Ratings and NEMA I.D. permanently marked on device

Terminal ID: Marked on Device

Termination: Back & Side

Terminal Accom.: 14-8 AWG

Product Features

Face Material: Ultramid

Warranty: Lifetime Limited

Color: Black

Base Material: Valox

NEMA: L5-20R

Standards and Certifications

CSA: C22.2 No. 42

UL: 498

UL Fed Spec WC-596: File E13399

UL498: File E13399

ANSI: C-73


NOM: 057

UL Fed Spec: W-C-596


NEMA: WD-1 & WD-6

Warranty

Warranty: Lifetime Limited

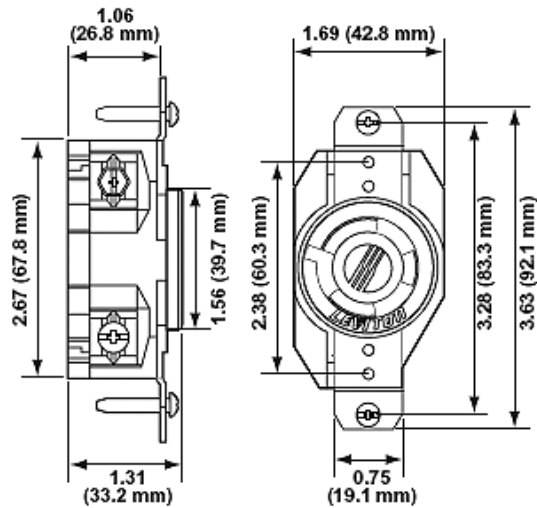

Wiring Diagram

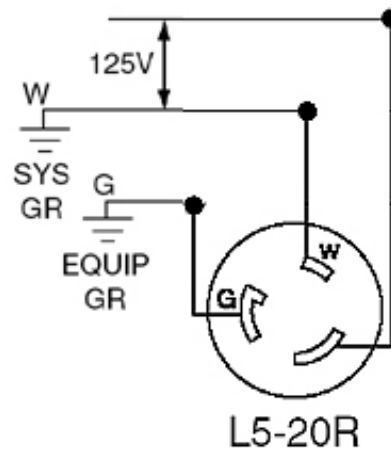

L5-20R

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2012 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

