


NEMA Locking Devices

Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.


Exposed Connector

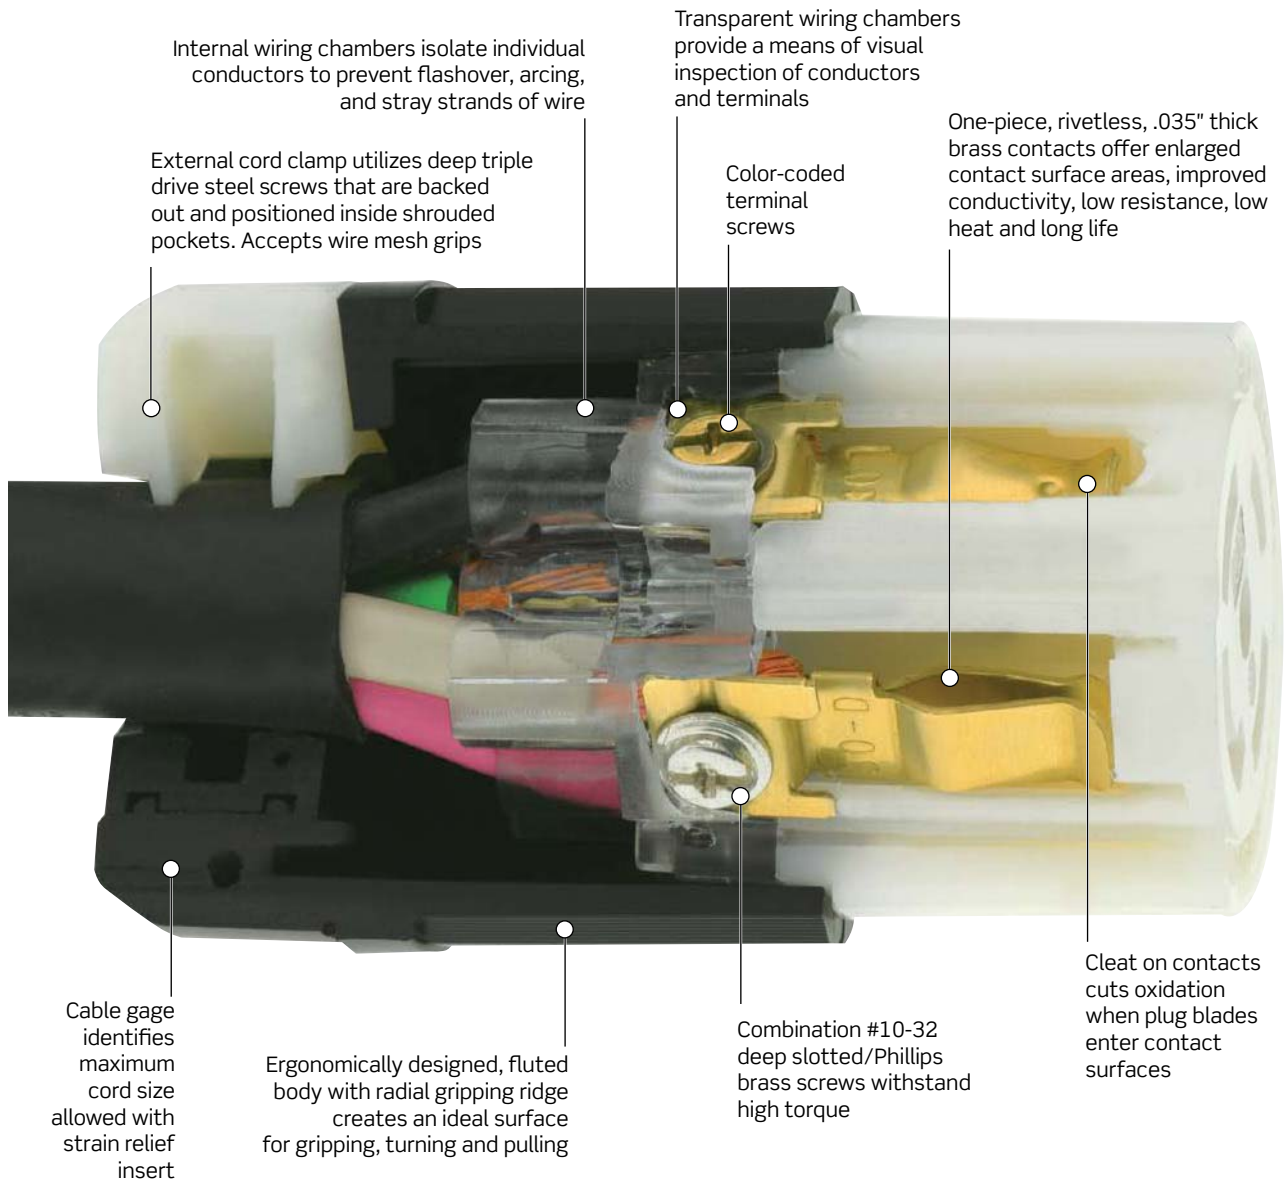

Exposed Plug

E

Locking Devices

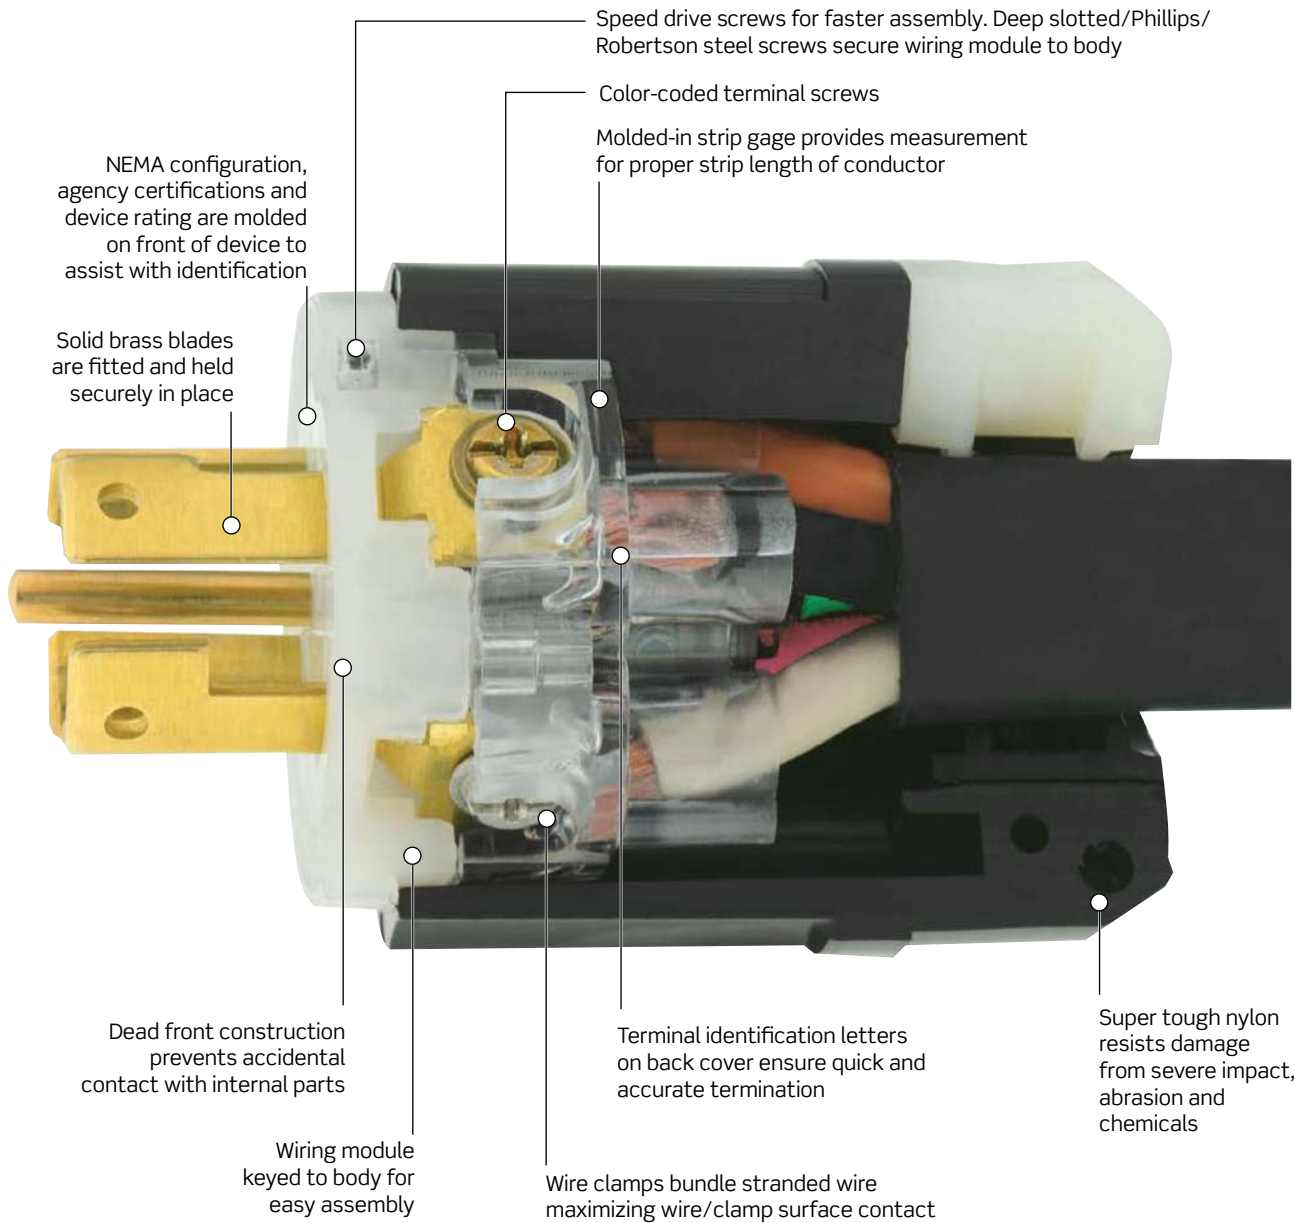

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.



Deep-funnelled, large wire wells guide conductors into termination position.


NEMA

Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-O flammability rating.

V-O-MAX®

Sample
Receptacles

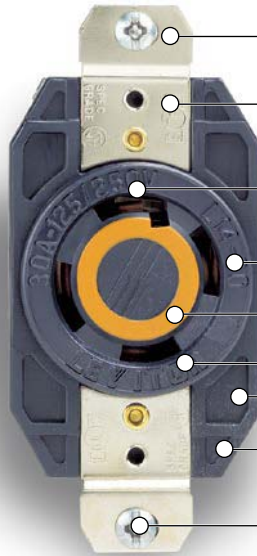

Extra thick .050" nickel-plated brass mounting strap

Stamped-in agency certifications

Molded-in amperage and voltage rating

NEMA configuration


Color-coded voltage rating

Manufacturer

Stability ribs

Uni-body face

Triple combination head mounting screws

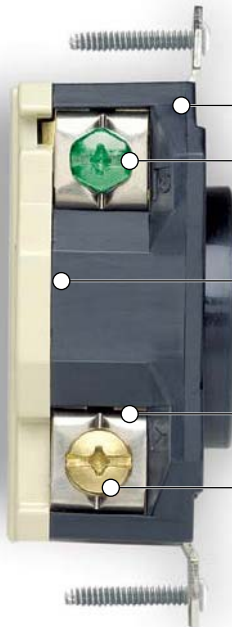

Molded-in terminal identification letters

Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors

Seam between front cover and back cover is far from contact working area

External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring

Oversized #10 brass Phillips/Robertson/straight slot drive terminal screw



V-O-MAX®
FLUSH RECEPTACLES-UL V-O RATING

Color-Coded Voltage Ratings

		
125V	250V	277VAC
		
125/250V	3ø250V	3ø480V
		
		600V

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Mechanically-secured all-brass ground path

15A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Features and Benefits

Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring — accepts wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7 for 3.5 years)
- Power Indication™ 20A and 30A Locking Plugs & Connectors equipped with green LED rated at 100,000 hours (24/7 for 10 years)

Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funnelled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps bundle stranded wire without cutting wire strands

Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impacts and harsh chemicals
- Double-wipe phosphor-bronze power contacts

V-O-Max® Locking Flush Receptacles

- UL 94 V-O flammability rating, the best rating of any material used in Industrial locking flush receptacles available today
- Extra-thick .050" nickel-plated brass mounting strap for high-abuse applications
- Designed for maximum durability: One-piece .040" brass, high copper-content contacts with nickel plated clamp-type terminals
- Color-coded voltage rating on face for easy identification

15A-125V

2-Pole, 2-Wire Non-Grounding  			
Rating	15A-125V		
NEMA	 L1-15P	 L1-15R	
Description	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	
Black & White® Nylon Body	7545-C	7506-C	
Flanged Outlet	—	7526-C	
Receptacles			
Duplex Flush Receptacle	—	7540	
Single Flush Receptacle	—	7535	



7545-C

20A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

20A-250V

2-Pole, 2-Wire Non-Grounding  			
Rating	20A-250V		
NEMA	 L2-20P	 L2-20R	
Description	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	
Black & White® Nylon Body	7102-C	7101-C	
Non-Polarized	7102-NP	—	
Receptacles			
Single Flush Receptacle	—	7210-B	



7102-C

20A-125V, 250V and 277VAC

2-Pole, 3-Wire Grounding  							
Rating	20A-125V		20A-250V		20A-277VAC		
NEMA	 L5-20P	 L5-20R	 L6-20P	 L6-20R	 L7-20P	 L7-20R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2311	2313	2321	2323	2331	2333	
All Black Nylon Body	2311-B	2313-B	—	2323-B	—	2333	
Yellow Nylon Body	2311-CY	2313-CY	2321-CY	2323-CY	—	—	
Power Indication™ Black & White® Nylon Body	2311-PLC	2313-PLC	2321-PLC	2323-PLC	2331-PLC	2333-PLC	
Power Indication™ All Black Nylon Body	2311-PLB	2313-PLB	—	—	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2315	2316	2325	2326	2335	2336	
Receptacles							
V-O-Max® Single Flush Receptacle	—	2310	—	2320	—	2330	
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2310-IG	—	2320-IG	—	2330-IG	



2311



2313



2310