

LED Strip Fixture

4' & 8'



Now, It Is Easier Than Ever to Upgrade & Save with our LED Strip Fixtures.

The Litetronics LED Strip Fixture features a diffuser lens with a sleek look that provides uniform light, 130 lumens per watt and 0-10V dimming. Plus, with a 100,000-hour rated life and ten-year warranty, you can use our fixture 14 hours/day for over 20 years. All the while, your investment be paying for itself with reduced maintenance, replacement and energy costs.

You will see saving benefits in our LED Strip Fixture almost immediately. It is designed for fast and easy installation. After you secure the lightweight frame to the ceiling, the LEDs, driver and lens assembly can be latched to the frame in an ideal position for quick, hands-free connection of the exposed wires. All that is left after connecting the wiring is to swing the assembly into final position and screw it together.

The Litetronics 4' and 8' LED Strip Fixtures are the easy way to upgrade the appearance and efficiency of your 1' x 4' fluorescent lighting.

Benefits

- 4' & 8' models
- DLC Premium listed models
- 100,000-hour rated life
- 10-year warranty
- Installs in minutes
- Universal 120-277V
- Shatterproof; safe for food service applications
- 0-10V Dimming
- For single or continuous row mounting
- Available with suspended mount accessories

Markets

- Hospitality
- Hospitals
- Offices
- Warehouse
- Retail
- Schools

Applications

- Retail Floor
- Corridor Lighting
- Task Area
- Cove Lighting

LITETRONICS®

6969 W. 73rd St.
Bedford Park, IL 60638
www.Litetronics.com

LED Strip Fixture

4' & 8'


Technical Product Information

Average Rated Life: 100,000H

CRI: 80

Power Factor: ≥0.95

Operating Temp.: -4°F to 113°F

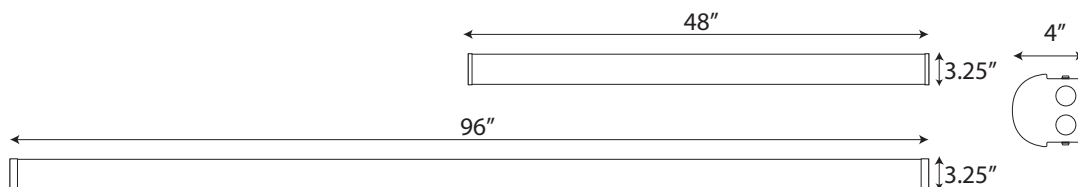

Part Number Matrix

XX (product family)	XX (wattage)	X (voltage)	X (connector)	XX (shape)	XX (color temperature)	XX (dimming)
SF = LED Strip Fixture	24 = 24 watts 40 = 40 watts 50 = 50 watts 64 = 64 watts	U = 120-277V	Q = QuickConnect	S4 = 4' Strip S8 = 8' Strip	35 = 3500K 40 = 4000K 50 = 5000K	DL = 0-10V Dimming

Product Specifications

TYPE	WATTS	VOLTS	DESCRIPTION	ORDERING CODE	CCT (K)	LUMINAIRE LUMENS	DIMMING	DLC PREMIUM	
4'	24	120-277	24W 4FT LED STRIP FIXTURE QC 3500K	SF24UQS435DL	3500	3,120	0-10V	YES	
			24W 4FT LED STRIP FIXTURE QC 4000K	SF24UQS440DL	4000				
	40		40W 4FT LED STRIP FIXTURE QC 3500K	SF40UQS435DL	3500	5,200		YES	
			40W 4FT LED STRIP FIXTURE QC 4000K	SF40UQS440DL	4000				
			40W 4FT LED STRIP FIXTURE QC 5000K	SF40UQS450DL	5000				
8'	50		50W 8FT LED STRIP FIXTURE QC 3500K	SF50UQS835DL	3500	6,500		0-10V	YES
			50W 8FT LED STRIP FIXTURE QC 4000K	SF50UQS840DL	4000				
			50W 8FT LED STRIP FIXTURE QC 5000K	SF50UQS850DL	5000				
	64		64W 8FT LED STRIP FIXTURE QC 3500K	SF64UQS835DL	3500	8,320		YES	
			64W 8FT LED STRIP FIXTURE QC 4000K	SF64UQS840DL	4000				
			64W 8FT LED STRIP FIXTURE QC 5000K	SF64UQS850DL	5000				




LED Strip Fixture


4' & 8'

Accessories:


SFAM01



A

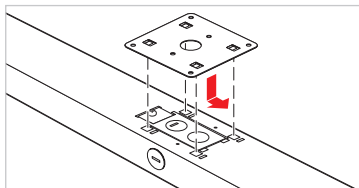

SFAM02



B







IMAGE	WEIGHT RATING	DESCRIPTION	ORDERING CODE	QTY/ CASE	ACCESSORY USE
A	-	STRIP FIXTURE JUNCTION MOUNT KIT	SFAM01	10	Used to mount 4' & 8' Strip Fixtures to junction box
B	25LBS	STRIP FIXTURE SUSPENSION MOUNT KIT	SFAM02	10	Used to suspend 4' & 8' Strip Fixtures from ceiling NOTE: Two kits needed for 8' assembly. Cable is 5'.

SFAM03



C


SFAM04




D

IMAGE	DESCRIPTION	ORDERING CODE	ACCESSORY USE
C	STRIP FIXTURE T-GRID FLUSH MOUNT KIT	SFAM03	Used to mount 4' & 8' Strip Fixtures to T-grid ceiling
D	STRIP FIXTURE 30 DEGREE ANGLE WALL WASHER MOUNT KIT	SFAM04	Used to mount 4' & 8' Strip Fixtures to T-grid ceiling at 30 degree angle


SFAM06, SFAM07



E, F



SFAM08



G

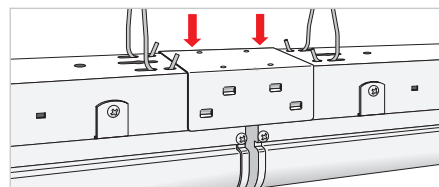


IMAGE	DESCRIPTION	ORDERING CODE	QTY/ CASE	ACCESSORY USE
E	STRIP FIXTURE 4' 14G WIRE HARNESS CONNECTING KIT	SFAM06	50	Used to connect two or more strip fixtures together from one power source
F	STRIP FIXTURE 8' 14G WIRE HARNESS CONNECTING KIT	SFAM07	50	Used to connect two or more strip fixtures together from one power source
G	STRIP FIXTURE ALIGNMENT BRACKET	SFAM08	50	Used to align two strip fixtures together

SFAS50



H





IMAGE	DESCRIPTION	ORDERING CODE	QTY/ CASE	ACCESSORY USE
H	STRIP FIXTURE KIT MOTION SENSOR IP65 1-10V DIM	SFAS50	8	Microwave motion sensor, IP65, 1-10V and rating 400W@120Vac, 800W@220-277Vac (inductive) and HF system 5.8GHz±75MHz, ISM wave band. For indoor use only




LED Strip Fixture

4' & 8'


Setup & Installation

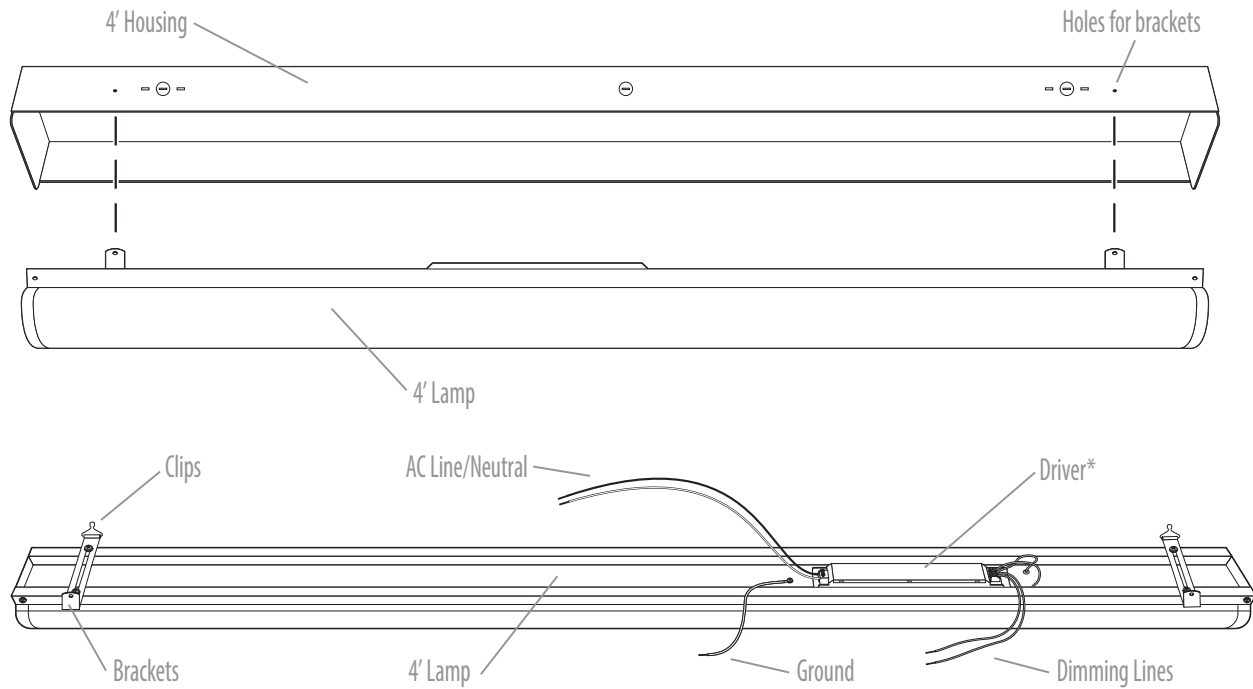


* Driver equipped with magnets for easy attachment.

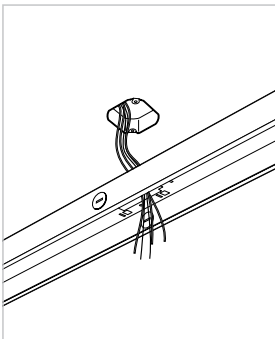


Mount and secure empty fixture.

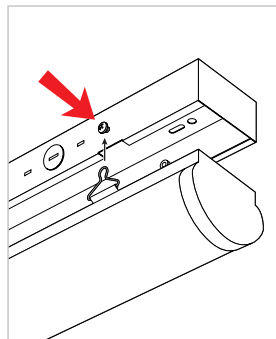

Hang lamp by clips for easy hands free wiring.

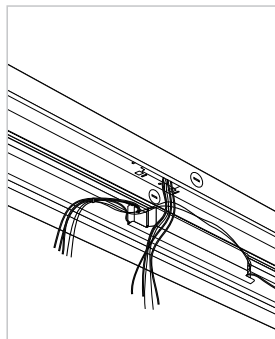

Make wiring connections.

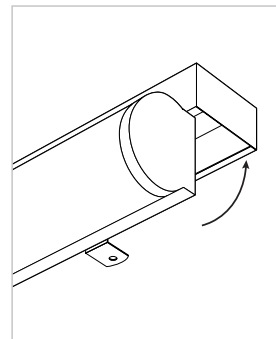

Swing the hanging lamp into position and secure brackets with screws.

