


Sectional Terminal Blocks

3/8" Sectional Channel (C), Flat (F), & DIN Mount

Specifications:

- 600 volts AC/DC
- 32 circuits per foot
- Meets IP20 touchproof requirement
- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE compliant
- RoHS compliant

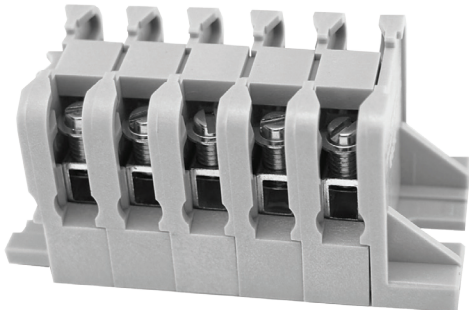

6G38 TS KK F


6G38 TS - Tubular Screw Connector

Materials:

- Base - grey thermoplastic, 125°C (UL RTI)
- Tubular screw connector- copper, tin plated
- Screw - #10-32 steel, nickel plated
- Wire termination torque 16 in-lb

Wire Ranges:

- 50 amps (40 Amps CSA)
 - Single and multiple wire combinations:
- | | |
|--------------------|----------------------|
| <u>Stranded CU</u> | <u>Solid CU</u> |
| (1) #8 - #18 AWG | (1) #10 - #16 AWG |
| (1-3) #12 AWG | (1-3) #12 AWG |
| (1-4) #14 AWG | (1-4) #14 or #16 AWG |



Ordering Code:

6G38 TS F	Flat mount block	Std pk 100	See Figure 2 On Page 90
6G38 TS C	Channel mount block	Std pk 100	See Figure 1 On Page 90
6G38 TS DIN	DIN mount block	Std pk 25	See Figure 3 On Page 90


6G38 TSKK - TS with Wire Protector Connector

Materials:

- Base - grey thermoplastic, 125°C (UL RTI)
- Kant Kut connector- copper, tin plated
- Screw - #10-32, nickel plated, pad - steel
- Wire termination torque 16 in-lb

Wire Ranges:

- 40 Amps
 - Single and multiple wire combinations:
- | | |
|----------------------|----------------------|
| <u>Stranded CU</u> | <u>Solid CU</u> |
| (1) #10-#22 AWG | (1) #10 - #14 AWG |
| (1-2) #12 AWG | (1-2) #12 or #14 AWG |
| (1-3) #14 AWG | |
| (1-4) #16 AWG | |
| (1-5) #18 or #22 AWG | |



WIRE PROTECTOR

Ordering Code:

6G38 TSKK F	Flat mount block	Std pk 100	See Figure 2 On Page 90
6G38 TSKK C	Channel mount block	Std pk 100	See Figure 1 On Page 90
6G38 TSKK DIN	DIN mount block	Std pk 25	See Figure 3 On Page 90